

# VELUX Heritage conservation roof window, GCL

**VELUX®**

## Glazing 01



---

VELUX Heritage conservation roof window is designed to be in keeping with historic façade aesthetics. Slim and elegant and sitting flush to the tiles, it blends beautifully into historic roofs.

- Authentic top-hung design in keeping with heritage aesthetics
- Slimmer black exterior profile for a perfect fit
- Seamless and stunning glass-to-edge fit
- Near flush installation blends into the roofing material, in keeping with the building's original character
- Central glazing bar that fulfils the design requirement for period authenticity
- Double glazing with glass-to-edge technology that comes with premium features, including safety lamination, toughened outer glass, UV filter, easy-to-clean coating and unique rain noise reduction
- The traditional roof window winding handle mechanism combines a simple operating method with a timeless heritage design



## Application guidance

The window can be installed in roof pitches between 20° and 65° to the horizontal.



The conservation roof window GCL is a top-hung window that is operated with a hand-winder fixed to the bottom frame. The window can be opened to a maximum of approx. 150 mm. The black profiles, central glazing bar and flashing beautifully match historical buildings.


## Available sizes and daylight area

|        | 550 mm                           | 660 mm                           | 780 mm                           | 942 mm                           | 1140 mm                          |
|--------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| 978 mm | GCL<br>CC04<br>(0.33)<br>[0.063] |                                  |                                  |                                  |                                  |
| 1178   | GCL<br>CC06<br>(0.42)<br>[0.066] | GCL<br>FC06<br>(0.53)<br>[0.076] | GCL<br>MC06<br>(0.65)<br>[0.087] |                                  |                                  |
| 1398   |                                  | GCL<br>FC08<br>(0.64)<br>[0.078] | GCL<br>MC08<br>(0.79)<br>[0.089] | GCL<br>PC08<br>(0.99)<br>[0.105] | GCL<br>SC08<br>(1.23)<br>[0.123] |
| 1600   |                                  |                                  |                                  |                                  | GCL<br>SC10<br>(1.43)<br>[0.126] |

All measurements are in mm. ( ) = Effective daylight area, m<sup>2</sup> [ ] = Geometric free area, m<sup>2</sup>

## Cross section dimensions

Please note that the view of the cross section is from bottom to top

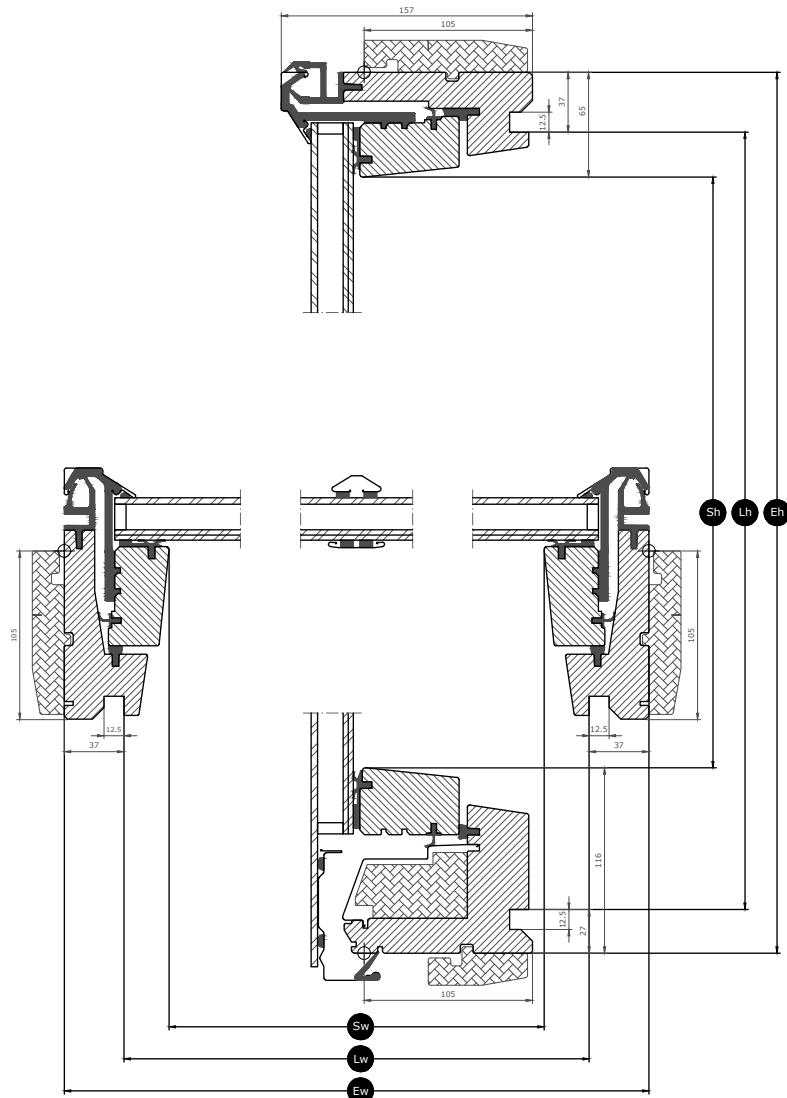

| Width |  | CC-- | FC-- | MC-- | PC-- | SC-- |
|-------|--|------|------|------|------|------|
| Sw    | Sash aperture width                    | 419  | 529  | 649  | 811  | 1009 |
| Lw    | Distance between lining grooves, width | 475  | 585  | 705  | 867  | 1065 |
| Ew    | Exterior frame width                   | 550  | 660  | 780  | 942  | 1140 |

| Height |   | --04 | --06 | --08 | --10 |
|--------|---|------|------|------|------|
| Sh     | Sash aperture height                    | 797  | 997  | 1217 | 1419 |
| Lh     | Distance between lining grooves, height | 913  | 1113 | 1333 | 1535 |
| Eh     | Exterior frame height                   | 978  | 1178 | 1398 | 1600 |

## Glazing features

| Glazing 01  |   |  |
|---|---|---|
|    | <b>Heat insulation</b><br>The low energy glazing unit reduces heat loss through the window and enhanced indoor comfort.   | $U_g = 1.1 \text{ W/}(\text{m}^2\text{K})$  |
|    | <b>Solar gain</b><br>In colder climates and in rooms with large window areas, solar gain provides a better indoor climate during winter periods.                        | 0.56  |
|    | <b>Solar protection</b><br>In warm climates and in rooms with large window areas, a sun protective glazing unit provides a better indoor climate during summer periods. | ★★★★  |
|   | <b>Security</b><br>Thicker laminated inner glass increases resistance to manual attack (burglary).  | ★★★★  |
|  | <b>Safety lamination</b><br>Prevents glass from falling into the room in case of accidental breakage.   | ✓   |
|  | <b>Toughened glass</b><br>Adds strength to the outer glass surface to protect from wayward balls and extreme weather such as heavy storms and hail.                     | ✓   |
|  | <b>UV filter</b><br>Protects your interior furnishings from fading due to the sun's harmful UV rays.  | ✓   |
|  | <b>Rain noise reduction</b><br>Rain noise reduction creates a barrier between the window and the weather outside for undisturbed moments during rainy days – or nights. | ✓   |
|  | <b>Easy-to-clean</b><br>Dirt-repellent coating lets you spend less time cleaning and more time enjoying the view.   | ✓   |
|  | <b>Anti-dew</b><br>The anti-dew coating significantly reduces the days with dew on the outer glass and thus gives you a clear view.                                     |   |

### Glazing structure

| Glazing unit  | Composition (from inside to outside)  |
|---------------|---|
| Double-glazed | 6.8 mm laminated float glass - 16 mm Argon - 4 mm toughened glass with enamel |

## Technical values for the window

Overview of technical values for the product, covering among other, CE marking in accordance with EN 14351-1.

| Window characteristics                       | Performance              |
|--|--------------------------|
| Thermal transmittance (U-value)              | 1.3 W/(m <sup>2</sup> K) |
| Light transmittance ( $\tau_v$ )             | 0.75                     |
| Total solar energy transmittance (g-value)   | 0.56                     |
| Sound insulation (Rw)                        | 35(-1;-3)                |
| Air permeability, [class]                    | 4                        |
| External fire performance - British [class]  | NPD                      |
| External fire performance - European [class] | Broof(t4)                |
| Impact resistance [class]                    | 3                        |
| Load-bearing capacity of safety devices      | N/A                      |
| Reaction to fire [class]                     | C-s1, d2                 |
| Resistance to snow load                      | See glazing composition  |
| Resistance to wind load [class]              | C3                       |
| Water tightness [class]                      | E900                     |

NPD: No Performance Determined

## Visible features



### Glass-to-edge technology

This roof window is precisely crafted with glass-to-edge technology for a seamless and stunning fit. The glass-to-edge technology allows water to run off the window easily.



### Glazing bar

The vertical glazing bar delivers a classic, traditional look to the conservation window.



### Hand-winder

The window is delivered with a hand-winder that is fixed to the bottom frame. When the handle is turned, the winder pushes out the window sash approx. 150 mm.



### Blind bracket, manual

Easily install blinds on the window without the need for extra tools. Simply click on the blind in the pre-fitted brackets.



### Gasket

Forming the air and sound seal between the frame and sash.



### Data plate

Every VELUX roof window has a unique data plate with information that can be used to look up CE marking documentation, when purchasing accessories or in case of service or replacement.

## Interior finish

---

| Material Description                   | White-painted<br>Finished with triple coat, white painted. |
|--|--|
| Colour code NCS, inner surface         | S 0500-N   |
| Colour code nearest RAL, inner surface | 9003   |

## Exterior covers

---

| Material Description                   | Aluminium, black<br>Black |
|--|---------------------------|
| Colour code NCS, outer surface         | S 9000-N                  |
| Colour code nearest RAL, outer surface | 9005                      |

## Cleaning and maintenance

---



The window can be cleaned inside with ordinary household cleaners. Cleaning of exterior glass must be done from the outside, but to reduce the frequency for exterior cleaning of the glass it comes with an easy-to-clean coating.



VELUX repair and maintenance kits are available.

## Guarantee period

---

## Flashings and installation products

---

The Heritage conservation roof window is constructed with a built-in insulation collar in the window frame. Install the VELUX Heritage conservation roof window by using a genuine VELUX flashing solution. The EDU flashing for slates and plain tiles up to 14 mm and the EDV flashing for profiled roofing material/tiles up to 90 mm are designed specifically for the exact size and shape of the Heritage conservation roof window and include underfelt collar and self-supporting drainage gutter (BFX) to create a perfect weathertight fit. The flashing is made by use of aluminum only.

## Blinds, awnings and shutters

---

VELUX Heritage conservation roof window is compatible with translucent and blackout energy interior pleated blinds for ultimate light control. Please contact your local VELUX sales company for more details.

## Further information

---

We reserve the right to make technical changes.

For more information on our products, please visit <https://velux.com>.