


VELUX solar 3in1 soft shutter SSSS



VELUX solar soft shutters deliver effective heat protection keeping your home cool on warm, sunny days. The durable light-tight fabric blocks out light when needed and reduces rain noise. It comes complete with a pre-paired wall switch for easy operation. The solar 3in1 soft shutters SSSS are specially designed for your VELUX 3in1 manual and solar roof windows GGLS and GPLS,

- Heat protection keeps your room cool and increases indoor comfort.
- The light-tight fabric provides blackout for a better night's sleep.
- VELUX solar interior blinds, awning blinds and roller shutters give you convenient remote control without any wiring.
- Maintenance-free design delivers peace of mind for the lifetime of your product.
- Compatible with VELUX ACTIVE with NETATMO for a better indoor climate with automatic heat protection. Remote controlled via smartphone or voice.
- Stepless positioning allows you to lower the shutter to exactly where needed.

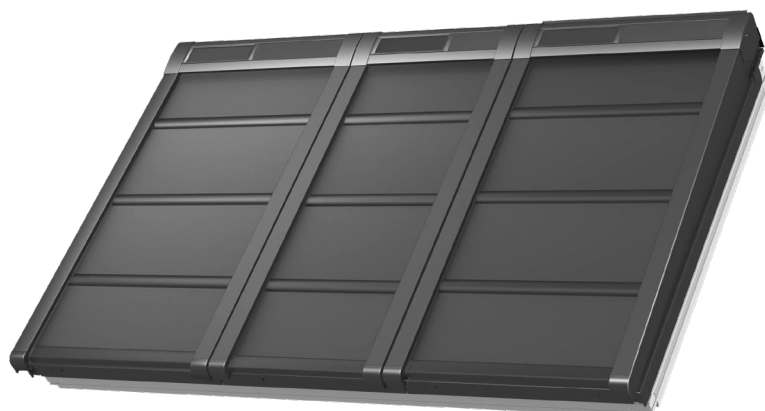

Operation guidance

The solar 3in1 soft shutters SSSS come with ready-to-use wall switches for remote control and can be raised and lowered to any desired position.

Compatibility

Compatibility with VELUX roof windows:

Solar 3in1 soft shutters SSSS can be fitted on VELUX 3in1 roof windows GGLS and GPLS.. As for sizes, please refer to the price list. The soft shutters can also be made to measure.

Solar 3in1 soft shutters SSSS can be combined with copper windows using the ZOZ FFKF-- 251.

If combining the soft shutters with solar 3in1 roof windows GGLS, 2 pcs. dual solar switch ZOZ 246 must be ordered.

Further information

We reserve the right to make technical changes.

For more information on our products, please visit <https://www.velux.co.uk> or <https://www.velux.ie>.

Technical information

Pre-paired wall switch	Power consumption overview	2 x alkaline AAA (1.5V) batteries Expected battery lifetime: Up to 1 year.
	Size and weight description	8.2 cm x 8.2 cm x 1.7 cm, 0.125 kg.
	Material and colour	ABS plastic, white (NCS S 1000-N)
	Installation and use	A pre-configured one-way radio frequency wall switch (KLI 313) is included. Radio frequency range: 300 m range open field. Depending on the building construction, the indoor range is approximately 30 m.
VELUX solar 3in1 soft shutter SSSS	Battery	High performance battery, NiMH, 9.6 V DC, 2100 mAh.
	Power consumption	High performance battery, NiMH, 9.6 V DC, 2100 mAh. The battery is an energy buffer for operation in periods with inadequate charging. A fully charged battery allows up to 100 operations. The shutter comes with a battery which must be switched on before operation. Expected battery lifetime: 10 years.
	Solar cell	Photovoltaic solar cell unit integrated in the top cover.
	Material and colour	Slats: Lacquered aluminium slats filled with polyurethane foam (does not contain Freon): grey (NCS S 7500-N). Hinges between slats: black rubber.
Exterior shield		
VELUX solar 3in1 soft shutter SSSS		The blackout fabric is made of polyester with PVC coating on both sides. The black cloth is tested toward UV and heat degradation as well as shrinkage deformation and curvy appearance.
	Connection	The soft shutter is a stand-alone product on an io-homecontrol® operation platform. It does not require any wiring or connection to mains supply.
	Installation and use	The VELUX solar 3in1 soft shutter SSSS can be installed from both the outside and the inside. The installation is both secure, fast and easy, among other things due to the specially designed VELUX "snap" brackets, and it can be done by one person.