

# VELUX fixed vertical window element VIU

**VELUX®**




Extend your views with a fixed, vertical window element. The window element fills the vertical space between the floor and the bottom of the roof window to provide more expansive views and more natural daylight. A maintenance-free, long-lasting polyurethane coating makes the window the perfect choice for any room in your home.

- Experience more daylight and extend your view by adding a vertical window element.
- A seamless look is made possible by the slim connection to the roof window.
- Maintenance-free, polyurethane coating makes the window ideal when easy maintenance is key.
- Increase the amount of light in your rooms with the white polyurethane coating.



## Application guidance

The vertical window element is always fixed to the bottom frame of a sloped roof window. The installation angle of the sloped window when combined with a vertical element is limited to 15-55°. The installation angle within this range is determined by the sloped roof window type and the flashing type with which it is installed.



The vertical window element VIU is installed vertically directly below a VELUX roof window. As it stretches nearly to the floor, it provides more daylight and an enhanced view when standing and when seated. The vertical window element VIU is fixed and cannot be opened.


## Available sizes and daylight area

The size overview shows the availability across the different glazing variants. Please note that the individual glazing variant may not be available in all the sizes shown.

|      | 780                         | 942                         | 1140                        | 1340                        |
|------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| 601  | VIU<br>MK31<br>(0.22)<br>[] | VIU<br>PK31<br>(0.28)<br>[] | VIU<br>SK31<br>(0.36)<br>[] | VIU<br>UK31<br>(0.43)<br>[] |
| 955  | VIU<br>MK35<br>(0.44)<br>[] | VIU<br>PK35<br>(0.56)<br>[] | VIU<br>SK35<br>(0.70)<br>[] | VIU<br>UK35<br>(0.85)<br>[] |
| 1155 | VIU<br>MK36<br>(0.56)<br>[] | VIU<br>PK36<br>(0.71)<br>[] | VIU<br>SK36<br>(0.89)<br>[] | VIU<br>UK36<br>(1.08)<br>[] |
| 1375 | VIU<br>MK38<br>(0.69)<br>[] | VIU<br>PK38<br>(0.87)<br>[] | VIU<br>SK38<br>(1.10)<br>[] | VIU<br>UK38<br>(1.33)<br>[] |

All measurements are in mm. ( ) = Effective daylight area, m<sup>2</sup> [] = Geometric free area, m<sup>2</sup>

## Cross section dimensions

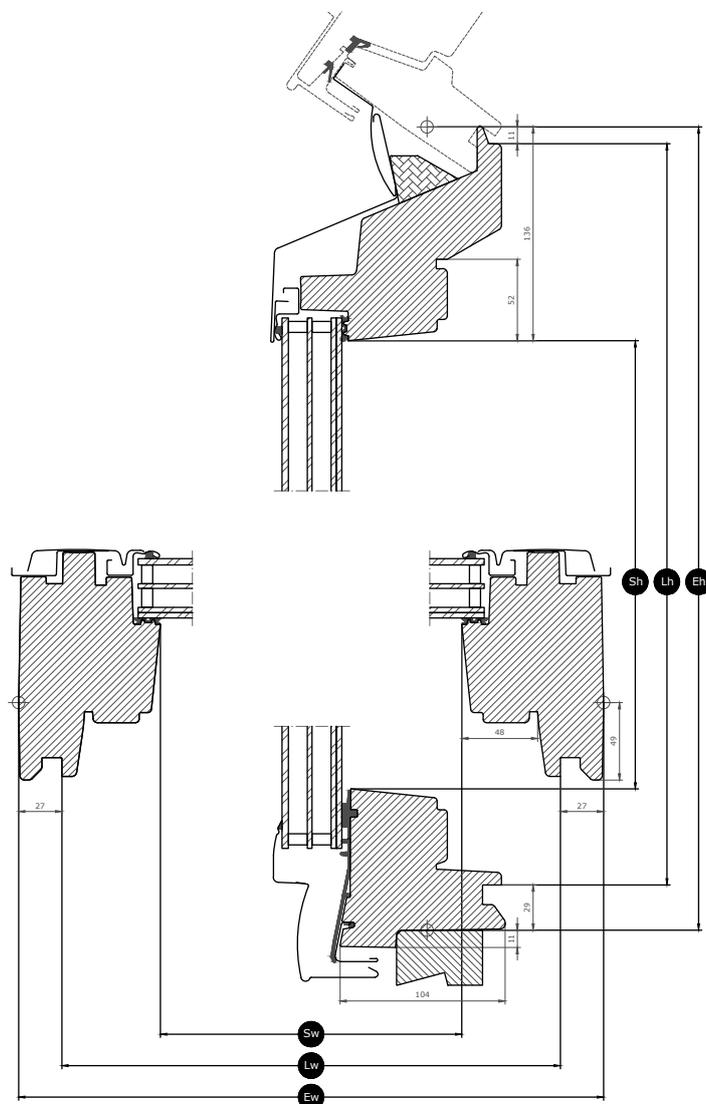

| Width |                                        | MK-- | PK-- | SK-- | UK-- |
|-------|----------------------------------------|------|------|------|------|
| Sw    | Sash aperture width                    | 601  | 763  | 961  | 1161 |
| Lw    | Distance between lining grooves, width | 725  | 887  | 1085 | 1285 |
| Ew    | External frame width                   | 780  | 942  | 1140 | 1340 |

| Height |                                         | --31 | --35 | --36 | --38 |
|--------|-----------------------------------------|------|------|------|------|
| Sh     | Sash aperture height                    | 377  | 731  | 931  | 1151 |
| Lh     | Distance between lining grooves, height | 561  | 912  | N/A  | 1335 |
| Eh     | External frame height                   | 601  | 955  | 1155 | 1375 |

## Glazing features

|                            | Glazing 66SG | Glazing 68 | Glazing 70 | Glazing 62SG |
|-------------------------------------------------------------------------------------------------------------|--------------|------------|------------|--------------|
| <br>Solar protection       | ★★★★☆        | ★★★★☆      | ★★★★☆      | ★★★★☆        |
| <br>Security               | ★★★★☆        | ★★★★☆      | ★★★★☆      | ★★★★☆        |
| <br>Safety lamination      | ✓            | ✓          | ✓          | ✓            |
| <br>Toughened glass       | ✓            | ✓          | ✓          | ✓            |
| <br>UV filter            | ✓            | ✓          | ✓          | ✓            |
| <br>Rain noise reduction | ✓            | ✓          | ✓          | ✓            |
| <br>Easy-to-clean        | ✓            |            |            |              |
| <br>Anti-dew             | ✓            |            |            | ✓            |

## Glazing structure

| Glazing variant | Glazing unit  | Variant composition                                                                                                |
|-----------------|---------------|--------------------------------------------------------------------------------------------------------------------|
| Glazing 66SG    | Triple-glazed | 6.8mm laminated float glass - 13mm Argon - 3mm heat strengthened glass - 13mm Argon - 4mm toughened glass          |
| Glazing 68      | Triple-glazed | 6.8 mm laminated float glass - 13 mm Argon - 3 mm heat strengthened glass - 13 mm Argon - 4 mm toughened glass     |
| Glazing 70      | Double-glazed | 6.8 mm laminated float glass - 16 mm Argon - 4 mm toughened glass                                                  |
| Glazing 62SG    | Triple-glazed | 6.8 mm laminated float glass - 11 mm Krypton - 3 mm heat strengthened glass - 11 mm Krypton - 8 mm toughened glass |

## Technical values for the window

Overview of technical values for the product, covering among other, CE marking in accordance with EN 14351-1.

|  | Glazing 66SG             | Glazing 68               | Glazing 70               | Glazing 62SG             |
|-----------------------------------------------------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
|                                                                                   | Performance              |                          |                          |                          |
| Thermal transmittance                                                             | 1.0 W/(m <sup>2</sup> K) | 1.1 W/(m <sup>2</sup> K) | 1.3 W/(m <sup>2</sup> K) | 1.0 W/(m <sup>2</sup> K) |
| Light transmittance                                                               | 0.62                     | 0.68                     | 0.68                     | 0.68                     |
| Total solar energy transmittance                                                  | 0.44                     | 0.49                     | 0.46                     | 0.47                     |
| Sound insulation                                                                  | 37(-2;-4)                | 35(-1;-3)                | 35(-1;-3)                | 42(-2;-5)                |
| Air permeability                                                                  | 4                        | 4                        | 4                        | 4                        |
| External fire performance - British                                               | AA                       | AA                       | AA                       | AA                       |
| External fire performance - European                                              | npd                      | npd                      | npd                      | npd                      |
| Impact resistance                                                                 | 3                        | 3                        | 3                        | 3                        |
| Load-bearing capacity of safety devices                                           | npd                      | npd                      | npd                      | npd                      |
| Reaction to fire                                                                  | D-s3,d2                  | D-s3,d2                  | D-s3,d2                  | D-s3,d2                  |
| Resistance to snow load                                                           | **                       | **                       | **                       | **                       |
| Resistance to wind load                                                           | C3 (>SK08: NPD)          | C3 (>SK08: NPD)          | C3 (>SK08: NPD)          | C3 (>SK08: NPD)          |
| Water tightness                                                                   | 9A                       | 9A                       | 9A                       | 9A                       |

Resistance to snow load = \*\* See glazing composition

NPD: No performance determined

## Interior finish

| Material Description                   | White maintenance-free<br>Finished with polyurethane lacquer. |
|----------------------------------------|---------------------------------------------------------------|
| Colour code NCS, inner surface         | S 0500-N                                                      |
| Colour code nearest RAL, inner surface | 9003                                                          |

## Exterior covers

The availability of the variants listed below may change. For the most accurate and up to date information, please refer to the current product catalogue or price list.

| Material Description                   | Aluminium, dark grey<br>Dark grey | Untreated copper |
|----------------------------------------|-----------------------------------|------------------|
| Colour code NCS, outer surface         | S 7500-N                          | No colour code   |
| Colour code nearest RAL, outer surface | 7043                              | No colour code   |

## Cleaning and maintenance



Frame and sash of the vertical window element can be cleaned with ordinary household cleaners. If necessary, the outer glass surface is cleaned from the outside.



VELUX repair and maintenance kits are available.

## Guarantee period



The full terms and conditions of the VELUX Product Guarantee are available on our website [www.velux.co.uk](http://www.velux.co.uk) or [www.velux.ie](http://www.velux.ie)

## Flashings and installation products

---



### **Flashings**

Install the VELUX roof window in virtually any roofing material by using genuine VELUX flashing solutions. Our flashings are designed specifically for the exact size and shape of the roof windows to create perfect, watertight fit. Flashings can also be used to combine multiple roof windows.

### **Installation products**

Ensure a proper installation and an air- and watertight connection between the window and roof with VELUX installation products. All installation products are designed to perfectly fit the roof window for a reliable and durable result.

## Blinds, awnings and shutters

---

Complete the VELUX roof window installation with roller shutters and awning blinds for heat protection and interior blinds for light dimming, blackout and insect protection. Choose from a wide range of manually operated or remote-controlled products that are made to fit the particular window type and size. Please contact your local VELUX sales company for more details about compatibility.

## Further information

---

We reserve the right to make technical changes.

For more information on our products, please visit <https://www.velux.co.uk> or <https://www.velux.ie>.