



Please note:
Below 15 degrees:
- Any condensation that forms on the glass due to high humidity may drip




ELEVATION

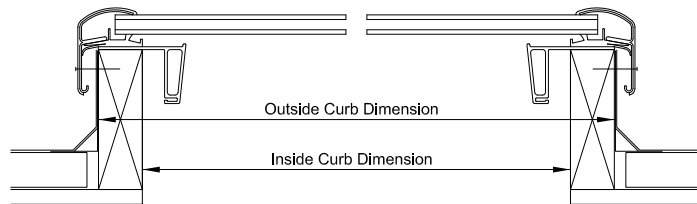

VELUX FCM skylight at 0 degrees
minimum pitch with purpose-made
membrane flashing in accordance
with manufacturers' recommendations

SECTION A-A

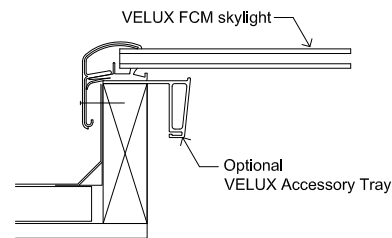

SECTION B-B

PRODUCT DIMENSIONS		
METRIC UNITS (MILLIMETERS)		
SIZE	OUTSIDE CURB DIMENSION	INSIDE CURB DIMENSION
2222	648 x 648	572 x 572
2246	648 x 1257	572 x 1181
2270	648 x 1867	572 x 1791
3030	851 x 851	775 x 775
3434	952 x 952	876 x 876
4646	1257 x 1257	1181 x 1181

* The upstand shall be in accordance with the minimum requirements as set out in the Approved Document for New Zealand Building Code - External Moisture, clause E2

** All flashings for FCM skylights are to be purpose-made to suit the roofing material, and subject to Approved Document for NZ Building Code - External Moisture, clause E2

VELUX Sky-Product Management	NEW ZEALAND LTD. 0800 650 445		Name Date
			Drawn by May 12
			Checked by May 12
			Drawing No.
FCM - Fixed Skylight in Membrane Roof (pitch <15 degrees)			