


Please note:
Below 15 degrees:
- Any condensation that forms on the glass due to high humidity may drip



ELEVATION

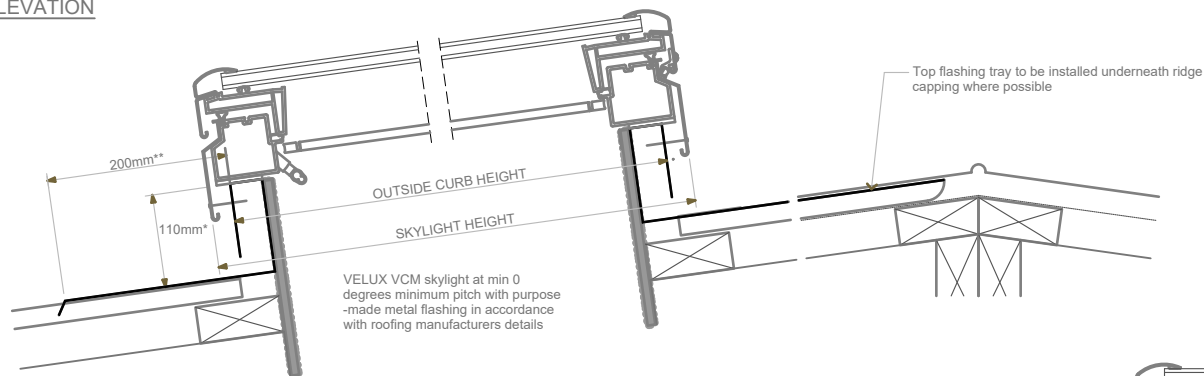


SECTION A-A

* The upstand shall be in accordance with the minimum requirements as set out in the Approved Document for relevant building code

** All flashings for VCM skylights are to be purpose-made to suit the roofing material, and subject to Approved Document for relevant building code

| PRODUCT DIMENSIONS | | | | | | | |
|----------------------------|--------------------|------------------------|----------------|---------------------|-------------------------|-----------------|-----------------------|
| METRIC UNITS (MILLIMETERS) | | | | | | | |
| SIZE | OUTSIDE CURB WIDTH | MAXIMUM FLASHING WIDTH | SKYLIGHT WIDTH | OUTSIDE CURB HEIGHT | MAXIMUM FLASHING HEIGHT | SKYLIGHT HEIGHT | DAYLIGHT AREA (SQ. M) |
| 2222 | 648 | 665 | 675 | 648 | 665 | 675 | 0.24 |
| 2234 | 648 | 665 | 675 | 953 | 970 | 981 | 0.39 |
| 2246 | 648 | 665 | 675 | 1257 | 1275 | 1284 | 0.55 |
| 3030 | 851 | 870 | 878 | 851 | 870 | 878 | 0.49 |
| 3046 | 851 | 870 | 878 | 1257 | 1275 | 1284 | 0.77 |
| 4646 | 1257 | 1275 | 1284 | 1257 | 1275 | 1284 | 1.22 |

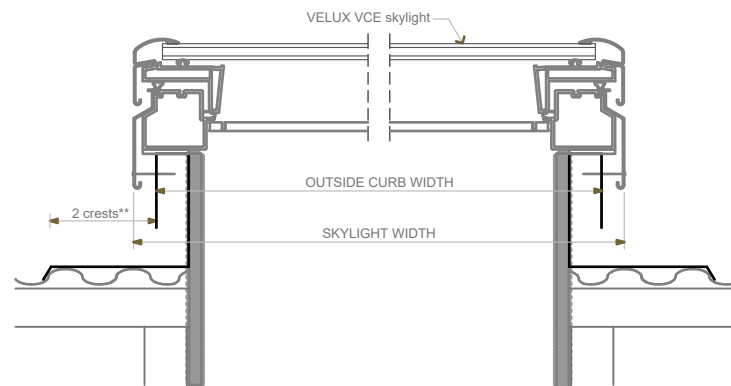

SECTION B-B

| | | | | |
|--|--|--|-------------|----------|
| VELUX <small>Sky-Global Product Management</small> | AUSTRALIA PTY. LTD | | Name | Date |
| | +612 8565 6000 | | Drawn by | Aug 2017 |
| | VCM - Manual Venting Curb Mounted Skylight in Profiled Metal Roof (pitch <15 degrees) | | Checked by | Aug 2017 |
| | | | Drawing No. | |

This drawing is an instrument of service and is provided for informational use only.

© 2017 VELUX GROUP

© VELUX is a registered trademark