


VELUX roof window GBL for low-pitched roofs

VELUX®




- Ideal for low-pitched roofs, this roof window is precisely crafted with glass-to-edge technology and is totally water resistant, even down to 10°.
- The glazing comes standard with premium features like safety lamination, toughened glass, UV filter and our unique rain noise reduction.
- Open the top control bar to the ventilation position for fresh air through a closed window.
- Upgrade to a remote-controlled solar-powered motor for extra convenience.
- Refresh your home by slightly opening the window and fixing it in the top bushing.
- Easily rotate the window 180° for safe cleaning of the outer glass from the inside.
- Removable and cleanable ventilation filter protects your home from dust and insects while ventilating.

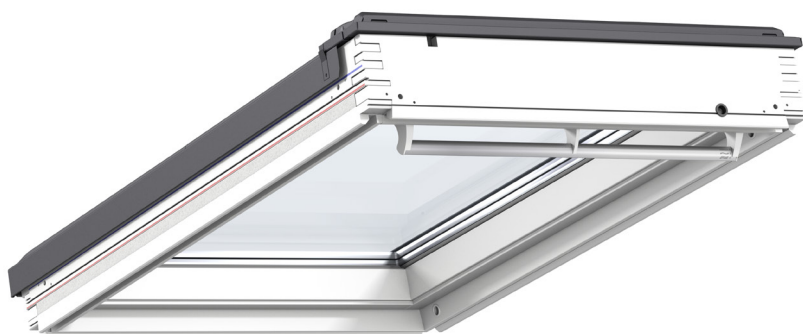

Application guidance

The window can be installed in roof pitches between 10° and 20° to the horizontal.



This manually top-operated, centre-pivot roof window is precisely crafted with glass-to-edge technology and totally water resistant, even down to 10 degrees. For out-of-reach situations, this roof window can be upgraded to solar powered operation via VELUX conversion kit (KSX).


Available sizes and daylight area

The size overview shows the availability across the different glazing variants. Please note that the individual glazing variant may not be available in all the sizes shown.

<STEPTABLE O="Product-7427005-1" OT="Product" TF=" " TT="27997589" VC="Context4" VO="26405707" W="Approved" />

All measurements are in mm. () = Effective daylight area, m²



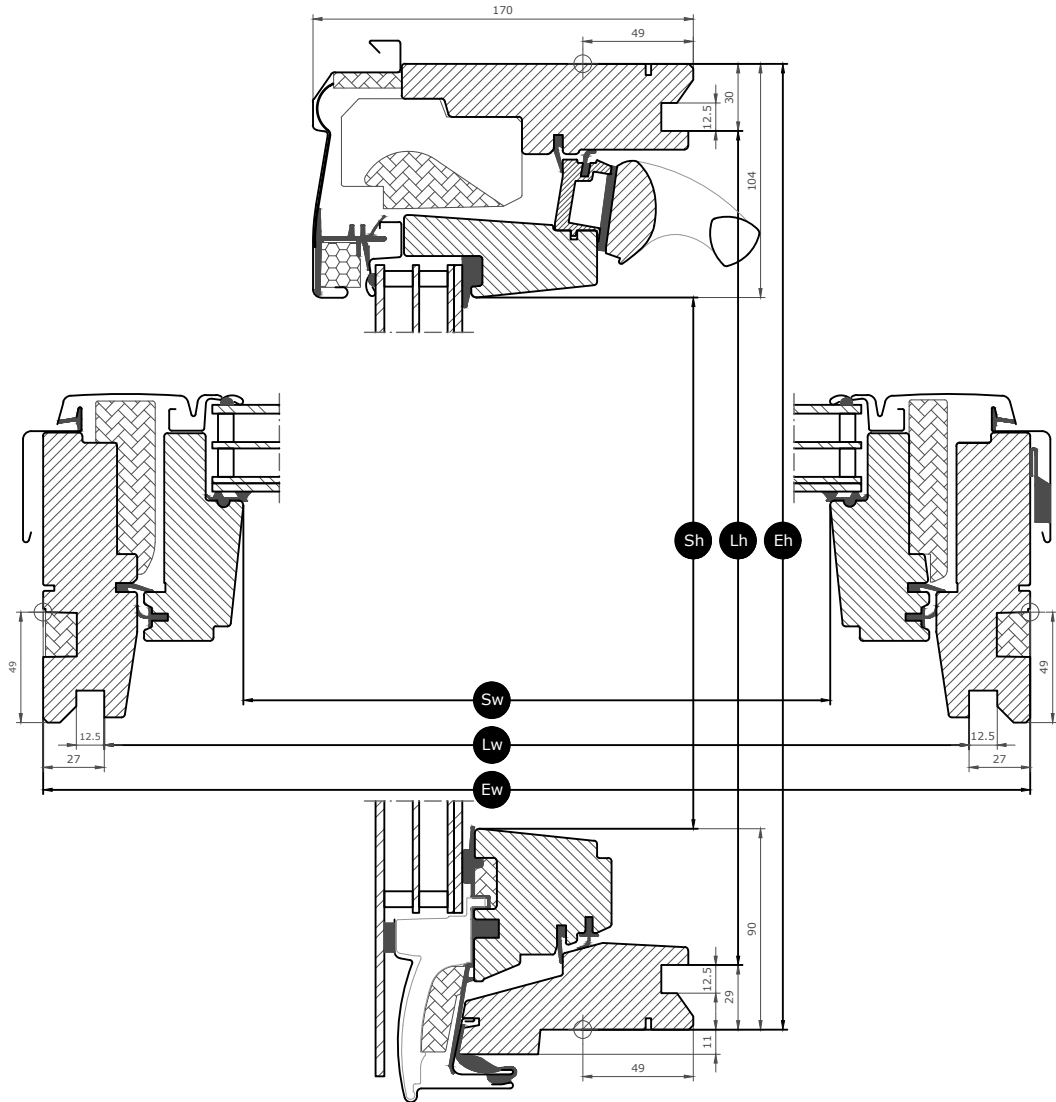





Cross section dimensions



<STEPTABLE O="Product-7427005-1" OT="Product" TF=" " TT="32601067" VC="Context4" VO="26405707" W="Approved" />

<STEPTABLE O="Product-7427005-1" OT="Product" TF=" " TT="32490867" VC="Context4" VO="26405707" W="Approved" />

Glazing features

 Solar protection
 Security
 Safety lamination
 Toughened glass
 UV filter
 Rain noise reduction
 Easy-to-clean
 Anti-dew

Glazing structure

Glazing variant	Glazing unit	Variant composition

Technical values for the window

Overview of technical values for the product, covering among other, CE marking in accordance with EN 14351-1.

<STEPTABLE O="Product-7427005-1" OT="Product" TF=" " TT="20137741" VC="Context4" VO="26405707"
W="Approved" />

Resistance to snow load = ** See glazing composition

NPD: No performance determined

<STEPTABLE O="Product-7427005-1" OT="Product" TF=" " TT="26341590" VC="Context4" VO="26405707"
W="Approved" />

Interior finish

Material Description	White-painted Finished with triple coat, white painted.
Colour code NCS, inner surface	S 0500-N
Colour code nearest RAL, inner surface	9003

Exterior covers

Material Description	Aluminium, dark grey Dark grey
Colour code NCS, outer surface	S 7500-N
Colour code nearest RAL, outer surface	7043

Cleaning and maintenance



To clean the outer glass surface from the inside, rotate sash manually and secure in cleaning position with barrel bolts.




VELUX repair and maintenance kits are available.

Guarantee period



The full terms and conditions of the VELUX Product Guarantee are available on our website www.velux.co.uk or www.velux.ie

Flashings and installation products

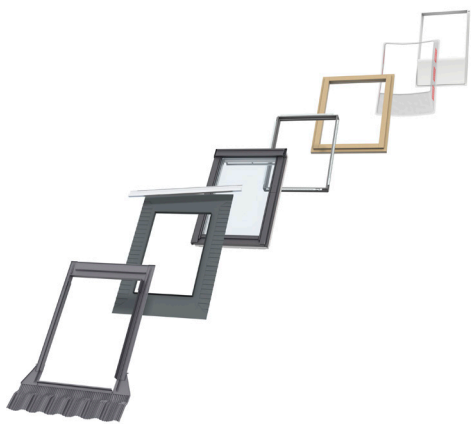

Flashings

Install the VELUX roof window in virtually any roofing material by using genuine VELUX flashing solutions. Our flashings are designed specifically for the exact size and shape of the roof windows to create perfect, watertight fit. Flashings can also be used to combine multiple roof windows.

Installation products

Ensure a proper installation and an air- and watertight connection between the window and roof with VELUX installation products. All installation products are designed to perfectly fit the roof window for a reliable and durable result.

Further information

We reserve the right to make technical changes.

For more information on our products, please visit <https://www.velux.co.uk> or <https://www.velux.ie>.

Technical information

<STEPTABLE O="Product-7427005-1" OT="Product" TF=" " TT="834558" VC="Context4" VO="26405707" W="Approved"
>