




Please note:
Below 15 degrees:
- Any condensation that forms on the glass due to high humidity may drip



ELEVATION

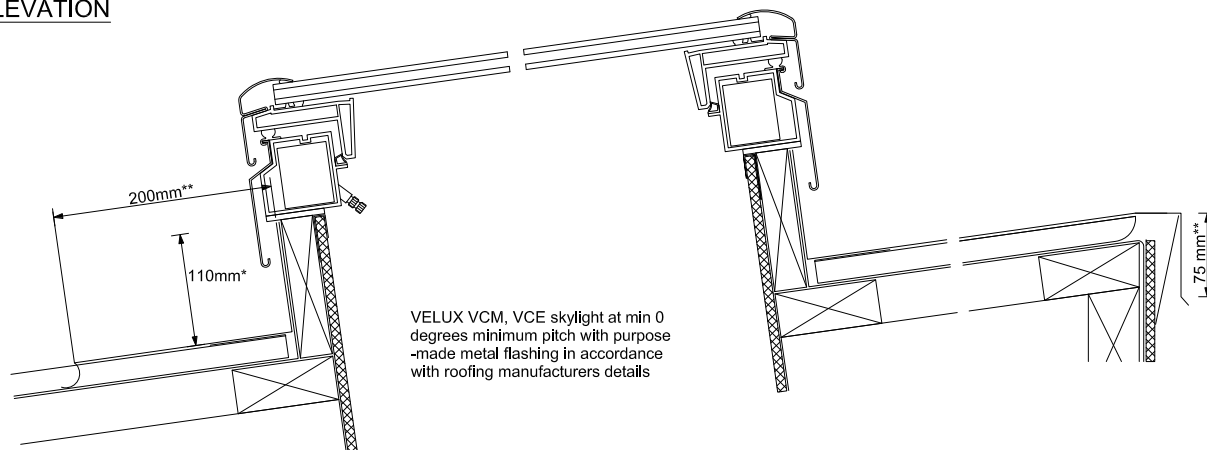

SECTION A-A

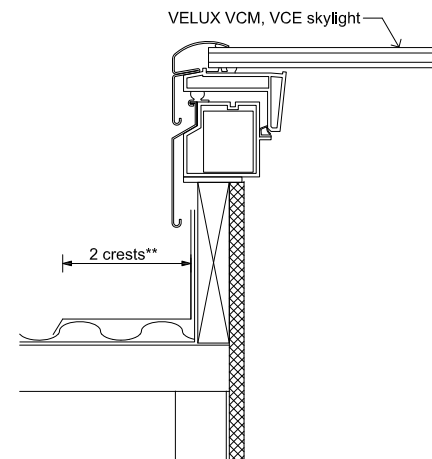

SECTION B-B

* The upstand shall be in accordance with the minimum requirements as set out in the Approved Document for New Zealand Building Code - External Moisture, clause E2

** All flashings for VCM & VCE skylights are to be purpose-made to suit the roofing material, and subject to Approved Document for NZ Building Code - External Moisture, clause E2

PRODUCT DIMENSIONS					
METRIC UNITS (MILLIMETERS)					
SIZE	OUTSIDE CURB WIDTH	SKYLIGHT WIDTH	OUTSIDE CURB HEIGHT	SKYLIGHT HEIGHT	DAYLIGHT AREA (SQ. M)
2222	648	688	648	688	0.24
2246	648	688	1257	1297.5	0.55
3030	851	891.1	851	891.1	0.49
4646	1257	1297.5	1257	1297.5	1.22

VELUX Sky-Product Management	NEW ZEALAND LTD. 0800 650 445		Name Date
	VCM, VCE - Venting Skylight in Profiled Metal Roof (pitch <15 degrees)		Drawn by Checked by Drawing No.
			June 11 June 11