52 VRW Roof windows en-GB - Approved

ate 18-11-2025 11:43:52 VRW Roof windows en-GB

VELUX roof window GPL



Glazing 70







Enjoy panoramic views of the outdoors and a feeling of extra space with the VELUX bottom-operated, top-hung roof window GPL. Open the window outwards by using the elegant handle at the bottom to allow for an uninterrupted contact to the outside.

- Open the window outwards up to 45° to enjoy a panoramic view and a feeling of space.
- Open the top control bar to the ventilation position for fresh air through a closed window.
- The glazing comes standard with premium features like safety lamination, toughened glass, UV filter and our unique rain noise reduction.
- Easily rotate the window 180° for safe cleaning of the outer glass from the inside.
- Adjust the bottom handle position to ventilate your home without opening the window.
- Removable and cleanable ventilation filter protects your home from dust and insects while ventilating.
- Quickly and easily add blinds by simply clicking them into the pre-fitted brackets.







Application guidance

The window can be installed in roof pitches between 15° and 55° (75°) to the horizontal.



Manual bottom-operated, top-hung roof windows open outwards for an unobstructed, panoramic view. To get the full benefit of the top-hung function, we recommend an installation height that allows for a clear sight line to the outside from both a standing and seated position. Please note that the optimum window height depends on the roof pitch.

Available sizes and daylight area


	550 mm	660 mm	780 mm	942 mm	1140 mm	1340 mm
mm	GPL CK04		GPL MK04	GPL PK04		GPL UK04
978 mm	(0.29) [0.39]		(0.47) [0.58]	(0.60) [0.72]		(0.91) [1.05]
mm	GPL CK06	GPL FK06	GPL MK06	GPL PK06	GPL SK06	
1178 mm	(0.37) [0.48]	(0.47) [0.60]	(0.59) [0.72]	(0.75) [0.89]	(0.95) [1.09]	
mm		GPL FK08	GPL MK08	GPL PK08	GPL SK08	GPL UK08
1398 mm		(0.58) [0.72]	(0.72) [0.87]	(0.91) [1.08]	(1.14) [1.32]	(1.41) [1.58]
00			GPL MK10	GPL PK10	GPL SK10	
1600			(0.85) [1.01]	(1.07) [1.25]	(1.35) [1.54]	

All measurements are in mm. () = Effective daylight area, m^2 [] = Geometric free area, m^2



Cross section dimensions

Please note that the view of the cross section is from bottom to top.

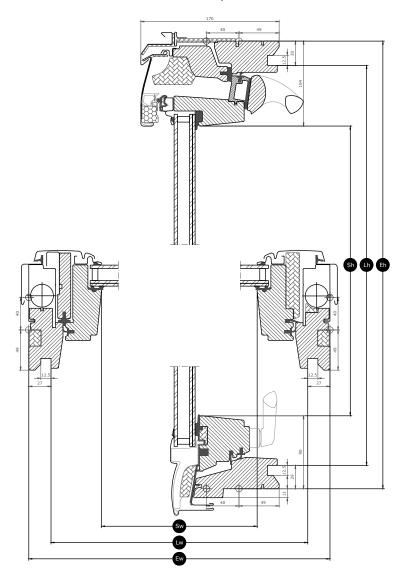

Width		CK	FK	MK	PK	SK	UK
Sw	Sash aperture width	371	481	601	763	961	1161
Lw	Distance between lining grooves, width	495	605	725	887	1085	1285
Ew	External frame width	550	660	780	942	1140	1340

Height		04	06	08	10
Sh	Sash aperture height	784	984	1204	1406
Lh	Distance between lining grooves, height	919	1119	1339	1541
Eh	External frame height	978	1178	1398	1600



Glazing features

Glazing 70



*/	Heat insulation The low energy glazing unit reduces heat loss through the window and enhanced indoor comfort.	U _g = 1.0
-;•;- _° - _° -	Solar gain In colder climates and in rooms with large window areas, solar gain provides a better indoor climate during winter periods.	0.46
% -°c	Solar protection In warm climates and in rooms with large window areas, a sun protective glazing unit provides a better indoor climate during summer periods.	***
1/2/	Security Thicker laminated inner glass increases resistance to manual attack (burglary).	***
<.> <	Safety lamination Prevents glass from falling into the room in case of accidental breakage.	J
	Toughened glass Adds strength to the outer glass surface to protect from wayward balls and extreme weather such as heavy storms and hail.	J
ÿ-uv →	UV filter Protects your interior furnishings from fading due to the sun's harmful UV rays.	J
	Rain noise reduction Rain noise reduction creates a barrier between the window and the weather outside for undisturbed moments during rainy days – or nights.	J
\$\frac{1}{2}	Easy-to-clean Dirt-repellent coating lets you spend less time cleaning and more time enjoying the view.	
00	Anti-dew The anti-dew coating significantly reduces the days with dew on the outer glass and thus gives you a clear view.	

Glazing structure

Glazing unit	Variant composition	
Double-glazed	6.8 mm laminated float glass - 16 mm Argon - 4 mm toughened glass	



Technical values for the window

Overview of technical values for the product, covering among other, CE marking in accordance with EN 14351-1.

Window characteristics	Performance
Thermal transmittance	1.3 W/(m²K)
Light transmittance	0.68
Total solar energy transmittance	0.46
Sound insulation	35(-1;-3)
Air permeability	4
External fire performance - British	AA
External fire performance - European	npd
Impact resistance	3
Load-bearing capacity of safety devices	V
Reaction to fire	C-s1,d2
Resistance to snow load	See glazing composition
Resistance to wind load	C3 (>SK08: NPD)
Water tightness	E900

NPD: No performance determined



Visible features



Operating handle, top-hung, bottom

Easy to operate handle allows for effortless opening and closing of the window.



Lifting device, top-hung

The lifting device facilitates the opening of the top-hung sash, once engaged with the spring rods.



Blind bracket, manual

Easily install blinds on the window without the need for extra tools. Simply click on the blind in the pre-fitted brackets.



Ventilation flap

The full-width ventilation flap can be used for ventilation even with a closed window. The ventilation flap is connected to the top sash with the lock casing.



Frame hinge, centre-pivot, side

Durable hinge design allows for reliable operation and enables the sash to be rotated for easy cleaning of the outer glass.



Interior insulation, frame top

Innovative ThermoTechnology™ insulation is integrated into the top frame of the window to increase energy-efficiency.



Barrel bolt

The barrel bolt can be placed into the integrated barrel bolt bushing to secure the window for cleaning of outer glass surface or for safe ventilation.



Data plate

Every VELUX roof window has a unique data plate with information that can be used to look up CE marking documentation, when purchasing accessories or in case of service or replacement.



Interior finish

Material Description	Clear lacquer Finished with triple coat, clear lacquered.	White-painted Finished with triple coat, white painted.	
Colour code NCS, inner surface	No colour code	S 0500-N	
Colour code nearest RAL, inner surface	No colour code	9003	

Exterior covers

Material Description	Aluminium, dark grey Dark grey	Titanium zinc	Untreated copper
Colour code NCS, outer surface	S 7500-N	No colour code	
Colour code nearest RAL, outer surface	7043	No colour code	

Cleaning and maintenance



To clean the outer glass surface from the inside, rotate sash and secure in cleaning position with barrel bolts.



VELUX repair and maintenance kits are

Guarantee period

The full terms and conditions of the VELUX Product Guarantee are available on our website www. velux.co.uk or www.velux.ie



Flashings and installation products



Flashings

Install the VELUX roof window in virtually any roofing material by using genuine VELUX flashing solutions. Our flashings are designed specifically for the exact size and shape of the roof windows to create perfect, watertight fit. Flashings can also be used to combine multiple roof windows.

Installation products

Ensure a proper installation and an air- and watertight connection between the window and roof with VELUX installation products. All installation products are designed to perfectly fit the roof window for a reliable and durable result.

Blinds, awnings and shutters

Complete the VELUX roof window installation with roller shutters and awning blinds for heat protection and interior blinds for light dimming, blackout and insect protection. Choose from a wide range of manually operated or remote-controlled products that are made to fit the particular window type and size. Please contact your local VELUX sales company for more details about compatibility.

Further information

We reserve the right to make technical changes.

For more information on our products, please visit https://www.velux.co.uk or https://www.velux.ie.