


**THIS DETAIL APPLIES TO METAL TRAPEZOID AND TROUGH ROOF PROFILES WITH ROOFPITCHES BETWEEN 15 AND 60 DEEGRES.**

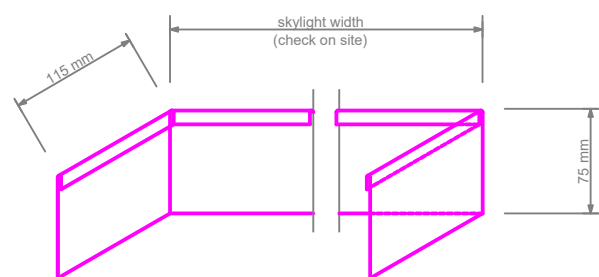

**\* Purpose-made top cover flashing**

Bottom flashing upstand with hooked anti-capillary edge. Flashing must be secured to skylight frame

20-20 mm diverter tags integrated in side flashing to bottom sides of skylight

Foam roofing infill strip to suit roof profile placed at mid-span of bottom apron flashing

Underlayment under roof material, and wrapped and taped around skylight frame

Custom Made Bottom Flashing (Refer to notes below)

200mm min (refer to notes below)

Custom-made flashing with cricket /diverter (Refer to notes below)

Purpose-made top cover flashing with hemmed anti-capillary top edge, by flashing contractor\* clamped

**BASIS OF DESIGN:**  
VELUX Fixed Skylight (FS)

blocking to suit roofing profile height


Trim-out opening frame as per VELUX Pitched Roof Skylight installation instructions

Fixing batten

Lining

Insulation positioned to suit roof space

**SECTION A-A**

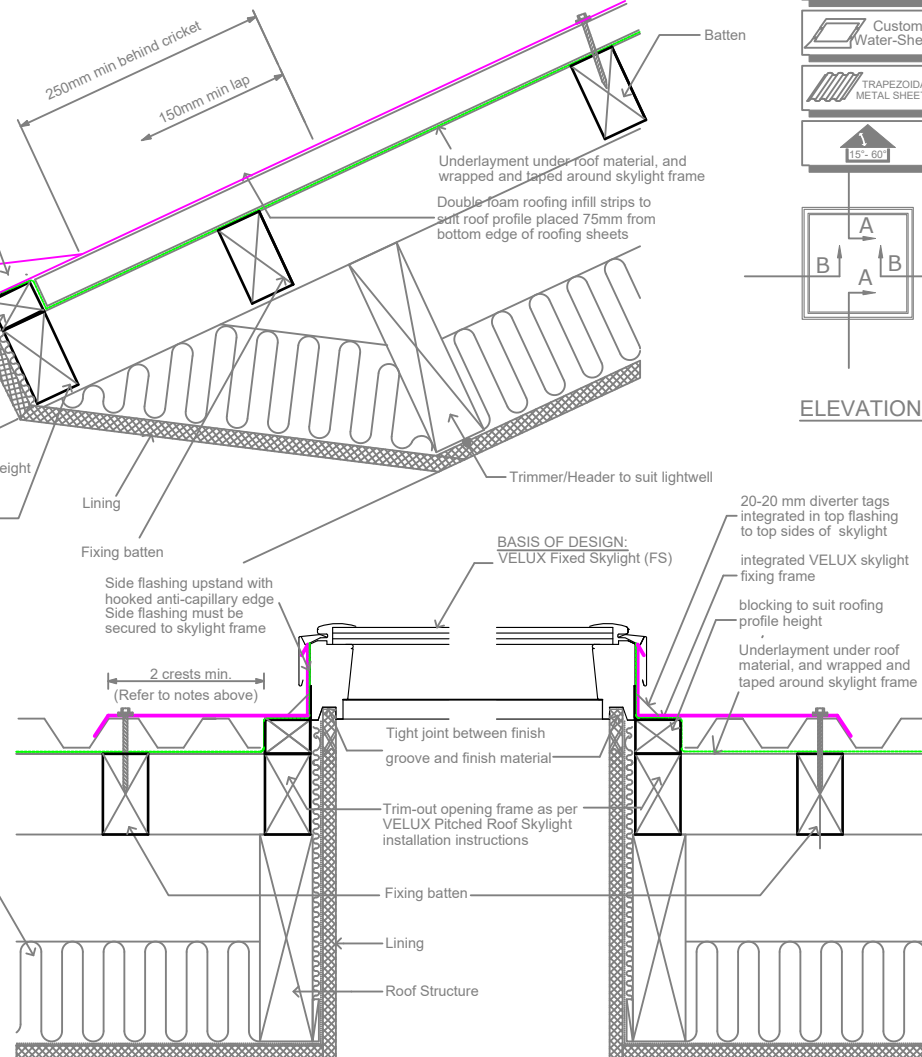

**ELEVATION**

**SECTION B-B**

**BRANZ APPRAISED CUSTOM WATER-SHED FLASHING**

This detail applies to all metal profile roofs with roof pitches between 15 and 60 degrees.

No cricket or diverter required when skylight is less than 600mm wide, and catchment less than 40 sqm.

Custom flashings must be designed to meet the requirements set out in the latest version of the New Zealand Metal Roof and Wall Cladding Code of Practice, and shall be manufactured and installed by a specialist flashing contractor to the latest trade practices.

For roofs with roof pitches less than 15 degrees, the VELUX Skylight must be installed to a min. 15 degrees.

The flashing and installation must be guaranteed against weathertightness by the specialist flashing contractor.

Insulation material meeting the requirements of NZBC/H1 is required in the cavities of the lightwell structure.

<b>VELUX</b> Sky-Product Management	<b>NEW ZEALAND LTD.</b> 0800 650 445	Name Date
	VELUX FS Fixed skylight with custom-made water-shed flashing for Trapezoid and Trough Metal Roofs with roof pitch 15-60 degrees	Drawn by Mar 19
		Checked by Mar 19
		Drawing No.