


VELUX solar 3in1 awning blind MSLS




VELUX solar awning blinds MSLS can be remote-controlled and reduce overheating to maintain a cool, comfortable temperature in your room. They are transparent, so you can always enjoy your views and natural light during the day. They connect with your VELUX manual or solar 3in1 roof window to give you total control over your indoor comfort.

- Heat protection keeps your room cool and increases indoor comfort.
- VELUX solar interior blinds, awning blinds and roller shutters give you convenient remote control without any wiring.
- Preserve your outside view, reduce unwanted glare and incoming sunlight
- Maintenance-free design delivers peace of mind for the lifetime of your product.
- Compatible with VELUX ACTIVE with NETATMO for a better indoor climate with automatic heat protection. Remote controlled via smartphone or voice.
- Stepless positioning allows you to lower the blind to exactly where needed.
- Built to last, the wind-resistant awning blind has been strength-tested in our testing facilities.

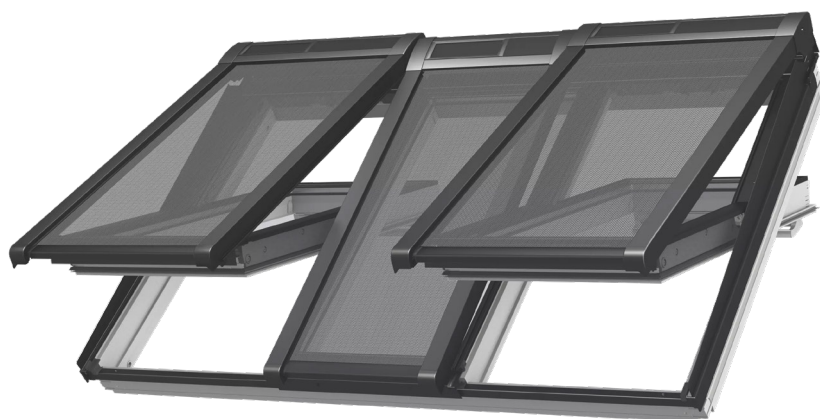

Colours and patterns

VELUX awning blind has a transparent mesh fabric. Add this fabric colour code to your awning blind type when you order your products.



5060

Operation guidance

The solar 3in1 awning blinds come with a ready-to-use wall switches for remote control and can be raised and lowered to any desired position.

Compatibility

Compatibility with VELUX roof windows:

Solar 3in1 awning blind MSLS can be fitted on VELUX 3in1 roof window GGLS and GPLS. As for sizes, please refer to the price list. The solar soft shutter can also be made to measure.

Solar 3in1 awning blind MSLS can be combined with copper windows using the ZOZ FFKF-- 251.

For installation on solar GGLS 3in1, 2 pcs. ZOZ 246 must be applied (to be purchased separately).

Further information

We reserve the right to make technical changes.

For more information on our products, please visit <https://www.velux.co.uk> or <https://www.velux.ie>.

Technical information

VELUX solar 3in1 awning blind MSLS	Battery	High performance battery, NiMH, 9.6 V DC, 2100 mAh.
	Connection	N/A
	Installation and use	VELUX solar 3in1 awning blinds MSLS are fitted on the outside of VELUX 3in1 roof windows GGLS or GPLS. Each awning blind is a stand-alone product on an io-homecontrol® operation platform. It does not require any wiring or connection to mains supply and is compatible with other solar-powered products. The awning blinds are recommended for use on manual or solar roof windows GGLS and GPLS.
	Material and colour	Top casing, side profiles and bottom cover: Lacquered aluminium, grey (NCS S 7500-N) Top casing end pieces, side profile bottom pieces and bottom cover end pieces: Tinted plastic, grey (NCS S 7500-N).
	Power consumption	High performance battery, NiMH, 9.6 V DC, 2100 mAh. The battery is an energy buffer for operation in periods with inadequate charging. A fully charged battery allows up to 100 operations. The blind comes with a battery which must be switched on before operation. Expected battery lifetime: 10 years.
Pre-paired wall switch	Solar cell	Photovoltaic solar cell unit integrated in the top cover.
	Installation and use	A pre-configured one-way radio frequency wall switch (KLI 313) is included. Radio frequency range: 300 m range open field. Depending on the building construction, the indoor range is approximately 30 m.
	Material and colour	ABS plastic, white (NCS S 1000-N)
	Power consumption overview	2 x alkaline AAA (1.5V) batteries Expected battery lifetime: Up to 1 year.
	Size and weight description	8.2 cm x 8.2 cm x 1.7 cm, 0.125 kg.