

A photograph of two young men sitting at a desk in a room with a slanted ceiling, wearing headphones and playing video games. They are positioned in front of a large VELUX skylight window that looks out onto a green landscape. The room has light-colored walls and a wooden floor. A volleyball and a box are on the floor near the window. The VELUX logo is in the top right corner.

**VELUX®**

# Product Catalogue

UK Price List (excludes VAT)  
Valid from 1<sup>st</sup> July 2026  
[velux.co.uk](https://www.velux.co.uk)





## Contact us

If you need more information or technical support, we are here to help.

Telephone: 01592 778 225  
E-mail: [sales@velux.co.uk](mailto:sales@velux.co.uk)

Website: [velux.co.uk](http://velux.co.uk)

# Contents

- 4 Transforming spaces
- 6 Why VELUX
- 8 Project solutions
- 10 Solar and electric
- 12 Extended product guarantee
- 13 VELUX App Control
- 14 Dormer and Mini dormer roof window systems
- 16 Finish options
- 20 Roof window selection guide
- 153 Practical information
- 162 Glazing options
- 166 Size guide

23 Remotes and Apps

27 Roof windows

69 Installation and flashings

89 Blinds and shutters

119 Flat roof windows

141 Sun tunnels

147 Accessories



# Transforming spaces into favourite places

We all seek spaces where we can truly relax, recharge and feel at ease – or even boost our productivity. More often than not, these favourite places are bathed in natural daylight and fresh air.

For over 80 years, the VELUX Group has helped people reimagine their homes by bringing daylight and fresh air through the roof, creating brighter, healthier environments to live, work, learn and play. It's all part of our mission to improve everyday life for people around the world.

Our award-winning roof windows can fit any roof – flat, pitched, old or new and can be accessorised with VELUX blinds and shutters.

Looking to expand your living space? Choose a VELUX Roof balcony or take your home to the next level with VELUX ACTIVE with NETATMO, our intelligent indoor climate solution.

VELUX solutions do more than brighten interiors – they help us create a connection with nature and a space to relax and enjoy. These spaces then become the backdrop for meaningful everyday moments: sharing laughter, bedtime stories or

simply enjoying a peaceful pause. Small, often overlooked pleasures, like these, are what truly make a house feel like home – reminding us of what it means to let life in.



## At VELUX® we prioritise sustainability

At the VELUX Group, we continually integrate sustainability into our decision-making, operations and solutions.

**The first and only roof window company in the world rated platinum by EcoVadis**

We are proud to be the only roof window company in the top 1% of organisations ranked globally by EcoVadis. The platinum sustainability rating reflects our commitment to integrating more sustainable practices throughout our organisation.



**97% of VELUX packaging in Europe was plastic-free in 2024\***

As of 2024, 97% of our primary packaging in Europe was paper-based and recyclable. Globally, we continue to eliminate plastic packaging from our products, making it easier for you to recycle and minimising the impact on the planet.

\* In 2024, 97% of Residential primary packaging in Europe was paper-based.

**96% of our products have an Environmental Product Declaration\*\***

With more transparency over the environmental impact of our products, you can make more informed decisions about most VELUX products.

\*\* Roof windows, flashings and installation products, excluding copper and zinc variants.





# Why VELUX

All over the world, VELUX roof windows contribute to healthy indoor environments by letting in fresh air and daylight. Here are five other good reasons why you should consider original VELUX products.

## Designed for easy installation and maintenance

VELUX solutions are built with our customers in mind. Our wide product range covers everything from sloped and flat roof windows to sun tunnels, blinds, shutters, remotes and apps – all designed for quick, reliable installation.




## Extensively tested

VELUX products are designed to meet the highest quality standards and undergo thorough testing. For example, all roof windows are tested to withstand a year's rainfall in just 15 minutes. They are also opened and closed 25,000 times – the equivalent of opening and closing the roof window every day for 68 years!



## 10-year guarantee

We strive to ensure the quality of all VELUX products and accessories live up to our customers' exacting standards. However, in the rare event that you experience a problem with your VELUX roof window, we offer a 10-year guarantee on all core products. We offer up to a 5-year guarantee on blinds, shutters and electrical products.

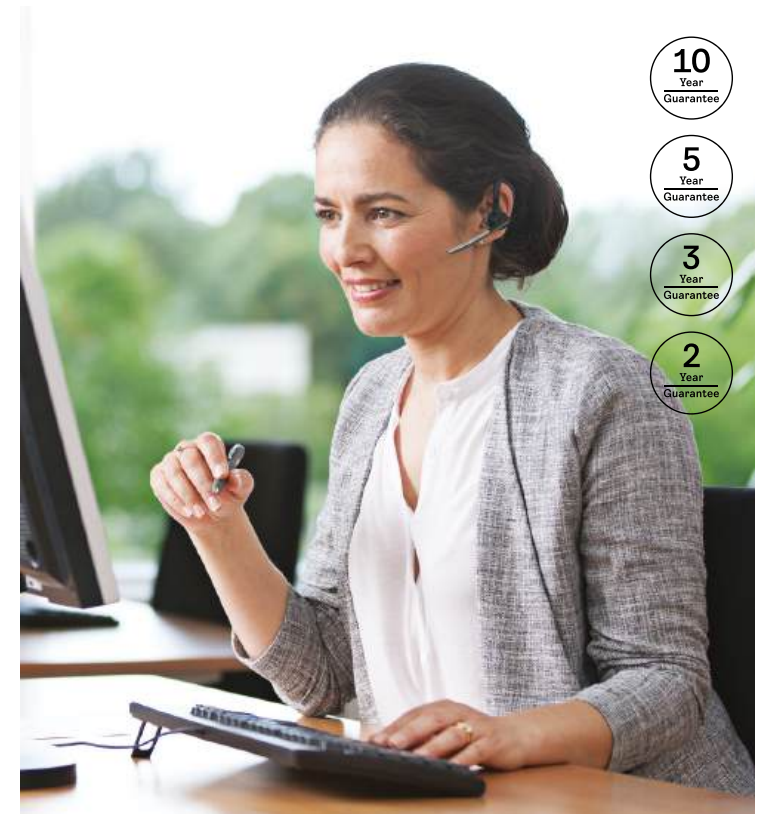

## Here for you

When you need support, our team is never more than a phone call away. The expert team are trained to give you as much in-depth assistance on planning, installation and aftercare as you need. Call us on 01592 778 225.

## Awarded A- for climate transparency and sustainability action

At VELUX, we are proud to have been awarded an A- for climate by the non-profit organisation, CDP. A non-profit that operates the world's leading independent environmental disclosure system, the CDP assesses companies on their climate and sustainability actions. The A- rating reflects the progress we have made on driving sustainability across our operations and strengthens our resolve to keep improving.





# Daylight solutions for a bright loft

Turn your loft into a bright, airy and usable space.

## Get the daylight right

Install the right number, type and size of roof windows to benefit from more daylight, fresh air and a better indoor climate.

## Get the operation right

Headroom in a loft is naturally reduced. Maximise the space with VELUX top-hung roof windows and create a balcony-like feeling.

## Get the finish right

A white maintenance-free internal finish will match modern interiors. The most robust and durable option that is completely maintenance-free.



# Roof windows for every extension

No matter the type of extension, there's a VELUX roof window solution to suit every need.

## Sloping roof windows

A combination of roof windows will help you achieve the optimum amount of daylight.

## Low pitch roof windows

Perfect for bringing daylight and fresh air into single storey extensions. Designed for roofs with a pitch as low as 10°.

## Flat roof windows

Different needs demand different types of solutions for flat roof projects. Our flat roof window range provides options to help create more daylight in your extension. Choose between our revolutionary curved glass rooflights, flat glass rooflights or traditional domes with glazing.



# It's time to replace and upgrade

When the time comes to replace old roof windows with new ones, VELUX is always the right choice. Here's why:

## More daylight with an unmatched range of roof windows

The glazing area on modern VELUX roof windows is increased thanks to slimmer profiles. This allows more daylight to enter into a space compared to older models.

## Better energy efficiency

An old roof window (even in good condition) is no match for a new VELUX roof window with its built-in insulation and improved glazing.

## Light and bright

When replacing old pine VELUX roof windows, we recommend a white maintenance-free internal finish – the most robust and durable option that is completely maintenance-free.

## It's easier than you think

Upgrading old roof windows with a new VELUX roof window can be done in as little as 4 hours.

Like-for-like replacements can often be carried out from the inside and by using VELUX replacement flashings, there is no need to remove or alter the existing lining – meaning no need to redecorate your room.

With VELUX QuickQuote you get a free, no obligation tailored estimate for replacing your old roof windows, including installation.

Fill out a few details and your quote will be ready in under 5 minutes.

Visit [velux.co.uk/quickquote](https://www.velux.co.uk/quickquote)



# Why solar and electric?

Designed to redefine the way you air out and control natural light in your home. VELUX solar and electric roof windows offer unparalleled convenience, allowing you to open and close them with a simple touch of a switch or your smartphone.

## Improved comfort and well-being

Invite fresh air and daylight in, to create a healthy home that's aired out more often, for a comfortable and energy-efficient indoor climate. Solar roof windows are also designed to store energy, allowing you to operate them even on cloudy days.



Rain sensor on VELUX solar roof window

They enhance ventilation, improve natural lighting and can even be integrated into your smart home system for added functionality. Solar options provide the additional benefit of using solar power to operate your roof window.

## Automatic protection from bad weather

Solar and electric roof windows feature a built-in rain sensor that automatically closes the roof window when it rains, allowing you to ventilate without having to worry about the weather or water damage.

## Easy installation

As easy to install as a manual roof window. A solar operated roof window requires no wiring while an electric version is easily connected to a power supply.

Many manual roof windows can be upgraded to solar versions using our upgrade kits. Read more on page 148.



## Save valuable energy

Whatever the time of year, you can ventilate your home efficiently with minimal energy loss.

Blinds and shutters can help save energy and improve indoor comfort throughout the year. In winter, blackout energy pleated interior blinds keep the room cosy, while in summer, Anti-heat blinds or shutters effectively reduce overheating.

## Always in control

Solar and electric roof windows offer you more control in the palm of your hand - at home or on the go. Manage daylight, temperature and even air quality effortlessly with our range of remotes and apps. Read more on page 23.



## VELUX solar and electric product range



Sloping roof windows



Flat roof windows

## Roof windows

Our solar and electric roof windows are available in a wide range of sizes and styles for sloping and flat roof projects. Providing ultimate comfort and convenience.

For more information see page 27.



Blinds



Shutters

## Blinds and shutters


Solar and electric blinds and Anti-heat shutters offer a superior automated solution that guarantees all year round comfort. Control heat and block out light at the touch of a switch or your smartphone.

For more information see page 89.



# Extended 10-year guarantee on solar and electric roof windows

The standard guarantee for solar and electric roof windows is 5 years. You can extend this period by an additional 5 years by simply registering your VELUX roof window.



## Standard 5-year guarantee

All solar and electric roof windows come with an impressive 5-year standard guarantee to support the durability and reliability of our products.

## Exclusive 5-year extended guarantee

Enjoy an additional 5-year guarantee and extend your total coverage to 10 years by registering your products at [velux.co.uk/extendedwarranty](https://velux.co.uk/extendedwarranty)



Focus

# Free VELUX App Control available with all solar and electric roof windows

When you purchase any of our solar and electric roof windows, you can claim a free VELUX App Control gateway.

This gateway is your key to unlocking additional benefits of your solar and electric roof windows, providing complete control from your smartphone.

## How to order

To claim your free VELUX App Control gateway, download the VELUX ACTIVE app from the App Store or Google Play Store on your smartphone. Follow the in-app process to order the VELUX App Control gateway. Visit [velux.co.uk/freeapp](https://velux.co.uk/freeapp) to learn more.

Discover more about the VELUX App Control gateway on page 24.







## Easy installation

The installation can often be done in just one day. As a result, your roof is only briefly open during the installation process.



## Flexible designs and accessories

Choose between a white maintenance-free or white painted interior finish. If you are looking to take the hassle out of cleaning and maintenance, opt for a white maintenance-free finish.

Selecting solar or electric operation offers the ultimate convenience and control – at home or on the go.

The Mini dormer comes in various options of 1, 2 or 3 roof windows side-by-side. The Dormer is available with 4 or 6 roof windows.

Add the finishing touch with internal blinds and external Anti-heat blinds and shutters for all year round comfort.

Discover more about the VELUX Dormer and Mini dormer roof window systems from page 62.

# Creating more daylight just got even easier

Whether you're converting a loft, adding a home office, or brightening up a bedroom – VELUX Dormer and VELUX Mini dormer roof window systems provide the perfect solution to increase space, daylight and fresh air in your home.



## More space

Extra space is hard to find in your home. VELUX Dormer roof window systems provide more headroom, making the room feel more spacious and comfortable. This extra space can make all the difference, especially in smaller loft spaces.

## More daylight

Natural light plays a crucial role in creating a warm, inviting atmosphere in any home.

A VELUX Dormer will provide up to 2.5 times more daylight compared to a traditional dormer with the same glazing area.

A VELUX Mini dormer will provide up to 1.5 times more daylight based on the same comparison.





Focus  
Finishes



Different finishes  
for different needs

# Choose your preferred finish


Our roof windows come in different finishes to match your needs and preferences on maintenance, durability and look.

- White maintenance-free**  
The most durable and robust finish that is completely maintenance-free.

  - **Moisture-resistant:**  
The ideal choice for all room types no matter the level of moisture or condensation.
  - **Wipeable surface:**  
The seamless corners and robust material make it quick and easy-to-clean.
  - **Outstanding quality:**  
A wooden core encased in a hard-wearing, waterproof white polyurethane mould.
- White painted**  
High-quality natural pine treated with a water-based white paint for a discreet wood grain look.

  - **Maintenance:**  
We recommend that VELUX white painted roof windows should be sanded and repainted approximately every 7 years.
  - **Look and design:**  
A white painted wood for those looking for a simple bright white finish.
  - **Durability:**  
White, water-based lacquer protects the wood frame from everyday levels of dirt and moisture.

Recommended

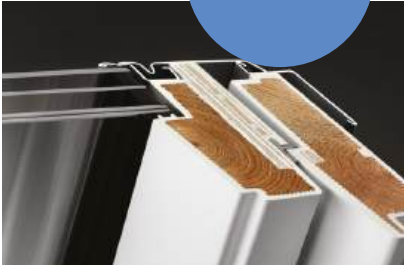

|                                                                                       |                      |   |   |   |   |
|---------------------------------------------------------------------------------------|----------------------|---|---|---|---|
|  | No repainting needed | • | • | • | • |
|  | Moisture resistant   | • | • | • | • |
|  | Robust material      | • | • | • | • |
|  | Easy-to-clean        | • | • | • | • |
|  | Smooth surface       | • | • | • | • |
|  | Seamless corners     | • | • | • | • |

|                                                                                       |                      |   |   |   |  |
|---------------------------------------------------------------------------------------|----------------------|---|---|---|--|
|  | No repainting needed |   |   |   |  |
|  | Moisture resistant   | • | • | • |  |
|  | Robust material      | • | • | • |  |
|  | Easy-to-clean        | • | • | • |  |
|  | Smooth surface       | • | • |   |  |
|  | Seamless corners     | • | • |   |  |





Focus  
Heritage conservation  
roof window

# Designed to complement heritage and conservation

Sensitively enhancing the future value of historical buildings

The Heritage conservation roof window is designed to look like a traditional roof window, fitting seamlessly into the historic aesthetic of older buildings. Slim, elegant and sitting flush to the roofing materials, it blends beautifully into historical roofs.

Drawing inspiration from the past, present and future, it enhances modern indoor living and transforms spaces into favourite places.

## Designed for heritage

Co-created with conservation specialists and specifically designed to be in keeping with heritage aesthetics of traditional buildings and properties located in conservation areas.

- Black, slim profiles create a traditional cast-iron look.
- Flush to the slates, blending beautifully into the roof.
- Glass-to-edge design for a clean, aesthetic appearance.
- Pro flashing set for profiled roofing materials up to 90mm, ensuring seamless and flush integration into the roof.







# Roof window selection guide

Natural light is essential to your well-being. Use the 7-step guide to ensure you get the right solution for your project.



## 1. Identify the roof pitch

Regardless of the roof pitch there is a VELUX solution. VELUX roof windows can be installed in all roof types:



**Flat**  
0-15°



**Low pitch**  
10-20°



**Sloping**  
15-90°



## 2. Calculate the right amount of daylight

The size and number of roof windows are fundamental to how the space will look and feel.

- We recommend the glazed area is approximately 20% of the floor area.
- This can be achieved with easy-to-install VELUX roof window combinations.
- Roof windows bring in twice as much daylight as façade windows.




## 3. Choose the operation

For ultimate convenience and comfort, we recommend VELUX solar roof windows.

- Easily installed, no wiring required.
- Operates even in cloudy weather.
- Integrated rain sensor closes the roof window in the event of rain.

Read more on page 10.

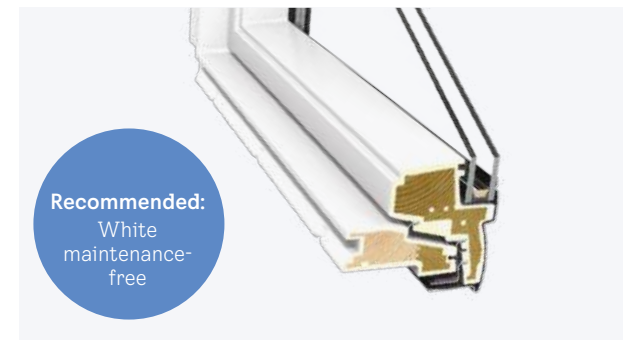


## 4. Choose the interior finish

For the most durable and robust result, choose a white maintenance-free finish.

- Moisture resistant, ideal for all room types.
- Wipeable surface with seamless corners.
- Wooden core encased in a hard-wearing, waterproof white polyurethane mould.

Read more on page 17.

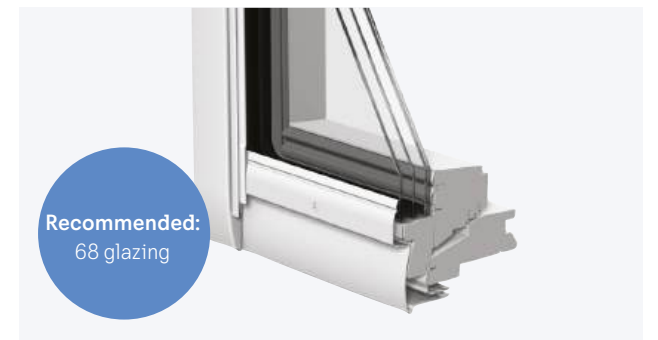

## 5. Choose the glazing

To achieve improved energy efficiency we recommend triple glazing.

- All the features of standard double glazing with additional thermal insulation and heat protection.
- Rain noise reduction for an undisturbed sleep.

Read more on page 162.



## 6. Flashing and installation

VELUX flashings provide a durable 100% watertight and weather-proof seal.

- Most VELUX flashings come with installation products included as standard to suit a wide range of roofing materials.
- We recommend using recessed flashings to provide a sleek and streamlined finish.

Read more on page 69.




## 7. Choose blinds and shutters

For better indoor comfort we recommend roof windows with blinds and exterior heat protection.

- Exterior heat protection adds insulation, protection from heat and the elements, enhanced rain noise reduction and daylight control.
- Interior blinds provide blackout or light dimming and decoration.
- All solutions provide a perfect fit, long-lasting performance and are easy to install.

Read more on page 89.



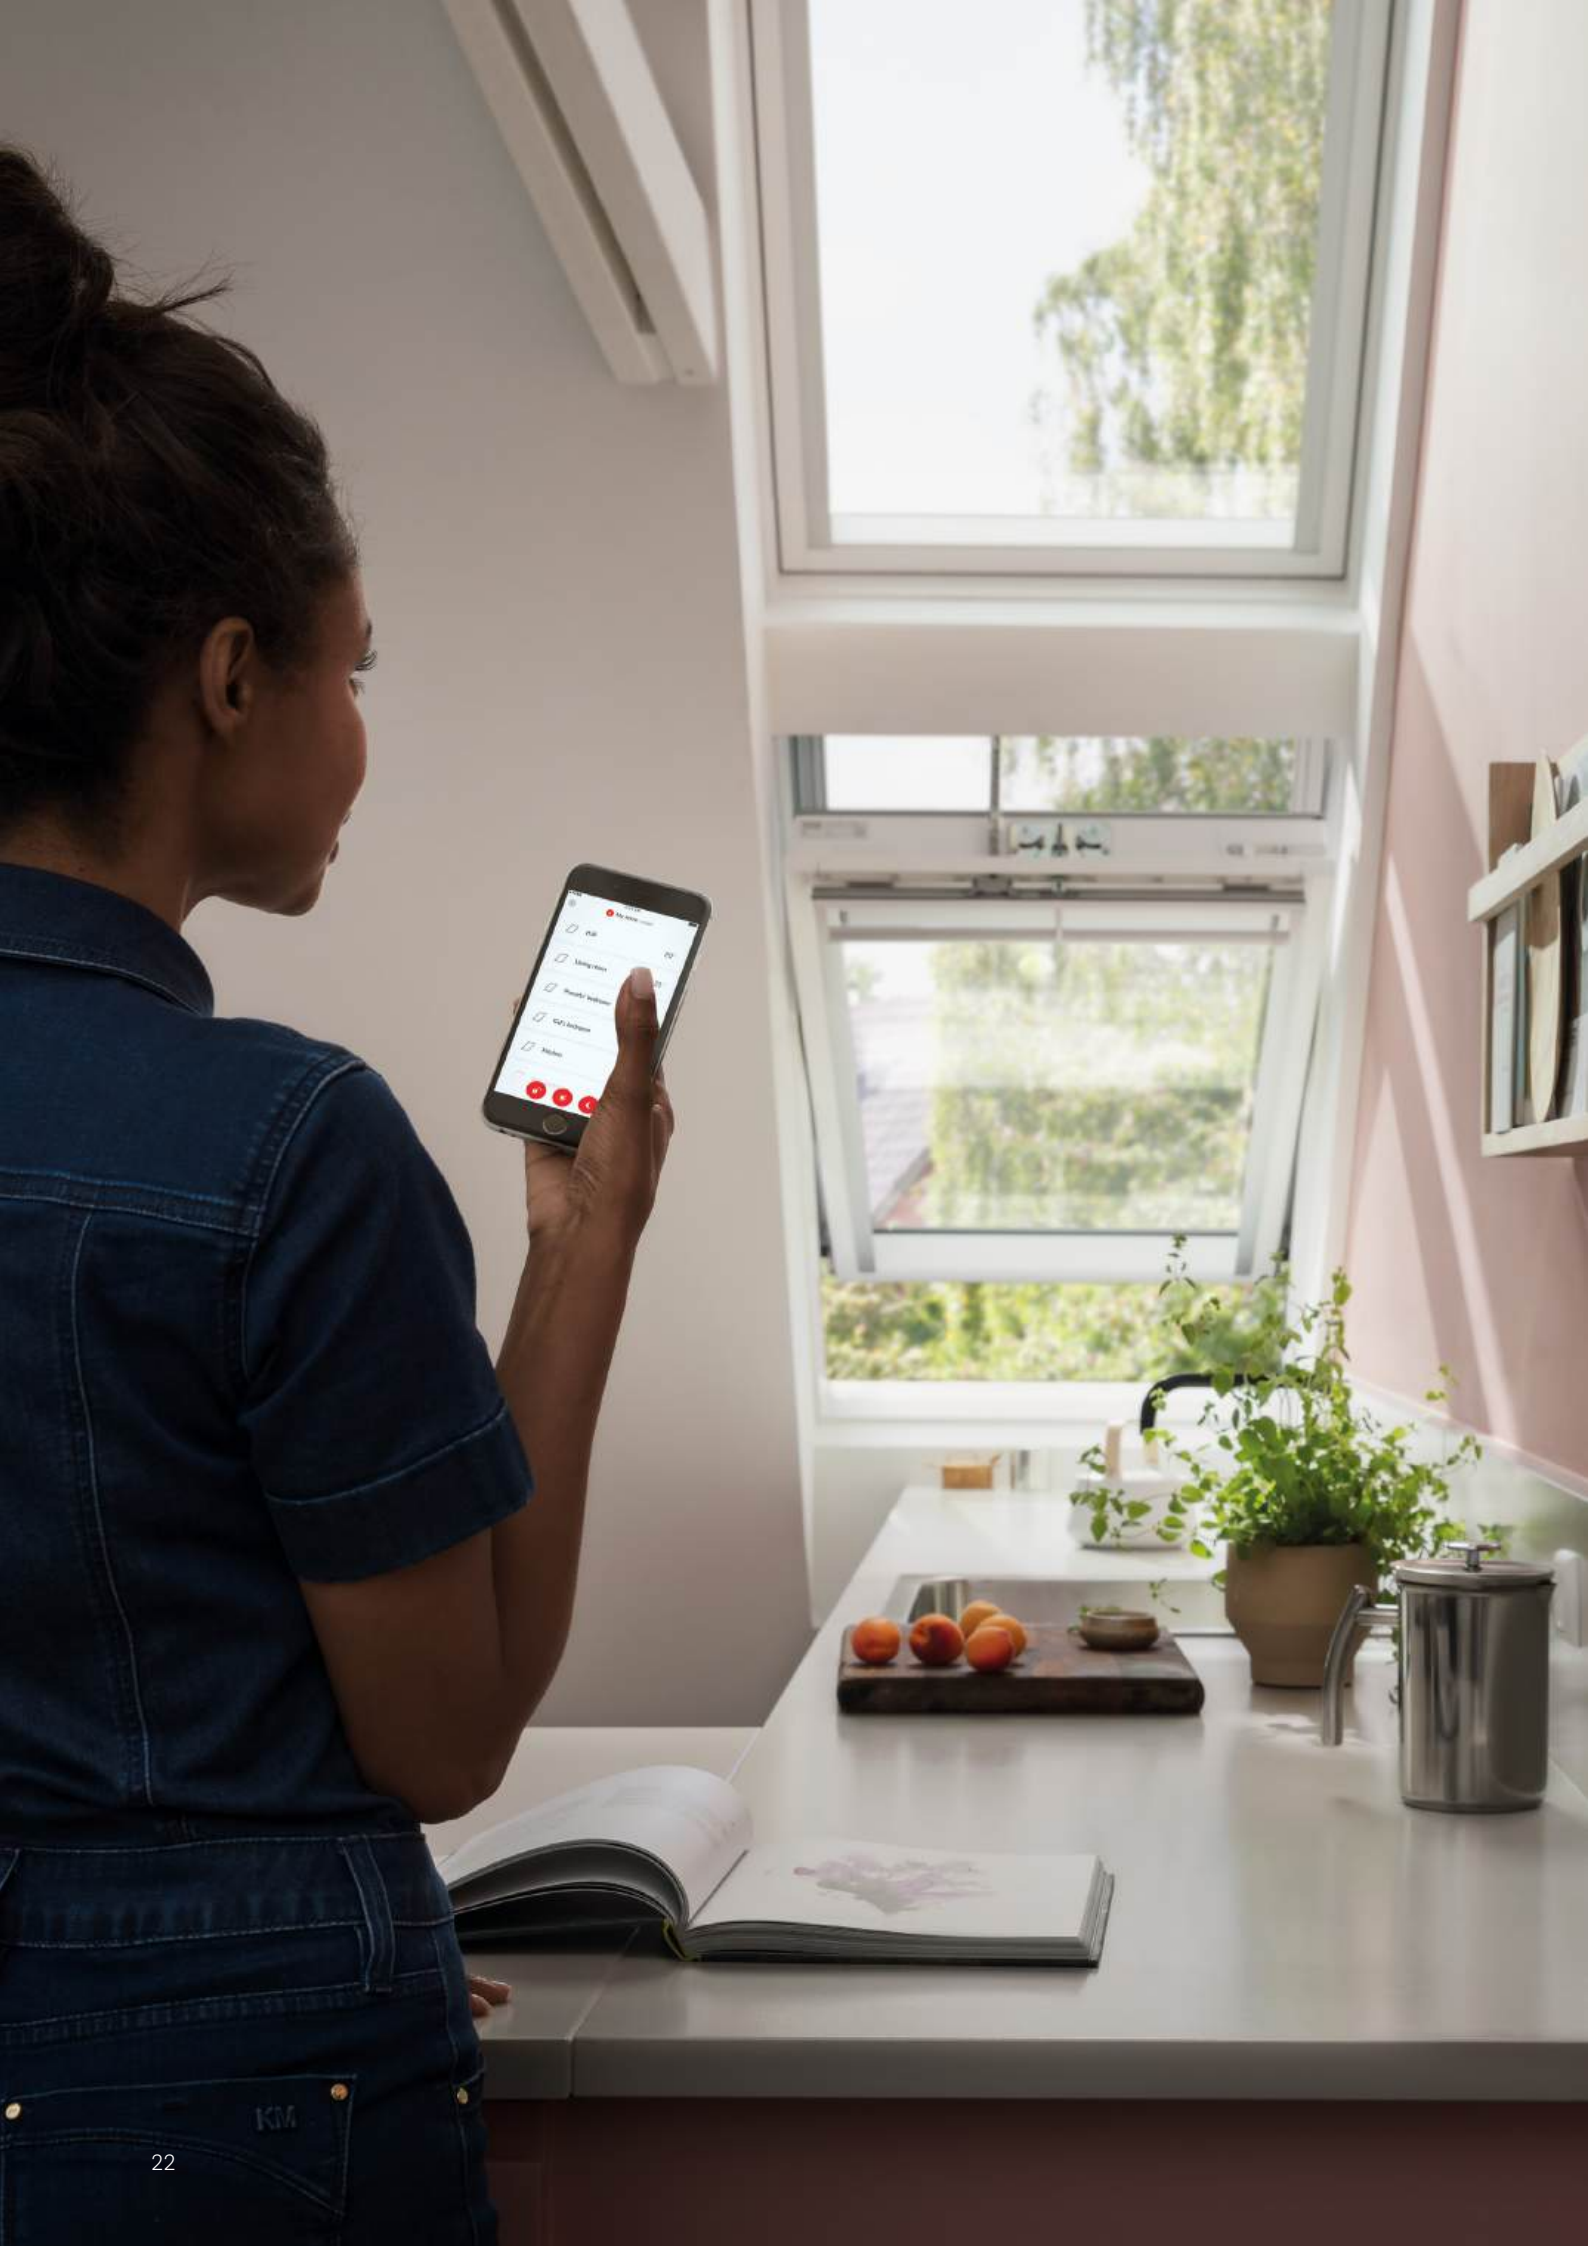

# Remotes and Apps

A variety of remote controls and apps are available to operate your VELUX roof windows, blinds and shutters. A range of solutions that empower you to take control of your indoor comfort with ease, while enjoying the full benefits of daylight and fresh air.





# Easy control options for your VELUX solar and electric products

Operate all your solar and electric roof windows, blinds and shutters with either a remote or an app.

|                                                          | Remotes                                                                            | Smartphone control                                                                 |                                                                                      |                                                                                      |
|----------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|                                                          | Included with all solar and electric products*                                     |                                                                                    |                                                                                      |                                                                                      |
|                                                          |  |  |  |  |
|                                                          | <b>Basic wall switch</b><br>VELUX Wall switch<br>KLI 311/312/313**                 | <b>Multiple product switch</b><br>VELUX Touch<br>KLR 300                           | <b>VELUX App</b><br>VELUX App Control<br>KIG 300                                     | <b>VELUX App with sensor</b><br>VELUX ACTIVE with NETATMO<br>KIX 300**               |
| Open/stop/close function                                 | ✓                                                                                  | ✓                                                                                  | ✓                                                                                    | ✓                                                                                    |
| No WiFi needed                                           | ✓                                                                                  | ✓                                                                                  |                                                                                      |                                                                                      |
| Quick in-room access to key functions                    |                                                                                    | ✓                                                                                  |                                                                                      |                                                                                      |
| Control multiple roof windows, blinds and shutters       |                                                                                    | ✓                                                                                  | ✓                                                                                    | ✓                                                                                    |
| Ventilation timer                                        |                                                                                    | ✓                                                                                  | ✓                                                                                    | ✓                                                                                    |
| Grouping of products for different rooms                 |                                                                                    |                                                                                    | ✓                                                                                    | ✓                                                                                    |
| Schedules for daily routines                             |                                                                                    |                                                                                    | ✓                                                                                    | ✓                                                                                    |
| Voice control                                            |                                                                                    |                                                                                    | ✓                                                                                    | ✓                                                                                    |
| Measurement of temperature, CO <sub>2</sub> and humidity |                                                                                    |                                                                                    |                                                                                      | ✓                                                                                    |
| Automatic ventilation and heat protection                |                                                                                    |                                                                                    | ✓                                                                                    | ✓                                                                                    |
| Indoor air quality overview                              |                                                                                    |                                                                                    |                                                                                      | ✓                                                                                    |
| Price                                                    |                                                                                    | 113                                                                                | 92                                                                                   | 190                                                                                  |

\* VELUX wall switch is included with every purchase of any solar or electric product. Additional purchases can be made for a more advanced control solution.  
\*\* Assortment of switches for interior or exterior accessories see page 148.

All prices in GBP (£)

Scan below to learn more about the range of control options



### Multiple product switch

**VELUX Touch**  
VELUX Touch is a multiple product switch that makes it easy to operate solar and electric roof windows, blinds and shutters. Control ventilation, block sunlight or close blinds with one master switch.



### VELUX App

**VELUX App Control**  
VELUX App Control is an app that makes it possible to operate all VELUX solar and electric products from a smartphone, enabling easy operation of roof windows, blinds and shutters.



### VELUX App with sensor

**VELUX ACTIVE with NETATMO**  
VELUX ACTIVE is an app with a sensor that can be used to operate all solar and electric products from a smartphone. It uses indoor climate sensors to monitor temperature, CO<sub>2</sub> and humidity in the home.





# Transform your home with a double roof window solution

Where there is space for one roof window, there is often space for two. With a side-by-side roof window combination, you more than double the daylight and view compared to a single roof window.

# Roof windows

## Roof window Page 28

- Solar and electric, centre-pivot
- Manual, centre-pivot
- Electric, top-hung
- Manual, top-hung
- Manual, Low pitch
- Heritage conservation
- Conservation

## Roof window combinations Page 42

- Integrated side-by-side
- Integrated triple
- Quattro
- Duo
- Sloping and fixed
- Sloping and vertical
- Roof balcony
- 3in1 solar, centre-pivot
- 3in1 manual, centre-pivot
- 3in1 manual, top-hung
- Dormer
- Mini dormer

## Special application roof windows Page 66

- Cold room
- Smoke ventilation





Rain sensor integrated into the roof window





Scan to watch the product benefit video



# Solar and Electric centre-pivot


Centre-pivot roof window: GGU and GGL

Experience effortless control with VELUX automated roof windows. Choose between solar or electric operation. Open and close your roof window with the wireless wall switch. Integrated rain sensors automatically close the roof window when the weather changes. Perfect for out-of-reach areas or simply making life easier.

- Integrated rain sensor for automatic closing.
- Basic wall switch included, see page 24.
- Solar – battery charges even in cloudy weather.
- Solar – easy installation with no wiring needed.
- Fully charged battery can open and close the roof window more than 100 times (solar only).

Find EPDs at [velux.co.uk/technical-library](https://www.velux.co.uk/technical-library)

## Roof pitch



## Interior finish options



**Recommended**  
**White maintenance-free**  
The most durable and robust finish that is completely maintenance-free



**White painted**  
High quality natural pine treated with a water-based white paint for a discreet wood grain look

| Glazing options      | Double glazing<br>--70 | Triple glazing<br>--68 | Triple glazing<br>--66 |
|----------------------|------------------------|------------------------|------------------------|
| Rain noise reduction | ✓                      | ✓                      | ✓                      |
| Safety lamination    | ✓                      | ✓                      | ✓                      |
| Toughened glass      | ✓                      | ✓                      | ✓                      |
| UV filter            | ✓                      | ✓                      | ✓                      |
| Easy-to-clean        |                        |                        | ✓                      |
| Anti-dew             |                        |                        | ✓                      |

|                                                          |     |     |     |
|----------------------------------------------------------|-----|-----|-----|
| Thermal transmittance of glazing (U <sub>g</sub> -value) | 1.0 | 0.7 | 0.6 |
|----------------------------------------------------------|-----|-----|-----|

Read more about glazing specifications on page 162.

## Blinds and shutters

- Consider interior blinds for light control, and exterior Anti-heat blinds or shutters for added heat protection.

Read more on page 89.

## Remotes and Apps

- Easily control your VELUX solar and electric products with our remote controls or apps.

- Free App Control included. Read more at [velux.co.uk/freeapp](https://www.velux.co.uk/freeapp)



| External frame sizes (w×h) cm | U-VALUE<br>W/m² K | CK02<br>55×78 | CK04<br>55×98 | CK06<br>55×118 | FK06<br>66×118 | MK04<br>78×98 | MK06<br>78×118 | MK08<br>78×140 | PK06<br>94×118 | PK08<br>94×140 | SK06<br>114×118 | UK04<br>134×98 |
|-------------------------------|-------------------|---------------|---------------|----------------|----------------|---------------|----------------|----------------|----------------|----------------|-----------------|----------------|
|                               |                   |               |               |                |                |               |                |                |                |                |                 |                |

### Solar centre-pivot

#### White maintenance-free

|  |            |     |     |       |       |       |       |       |       |       |       |       |       |
|--|------------|-----|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|  | GGU 007030 | 1.3 | 794 | 818   | 837   | 888   | 855   | 917   | 973   | 973   | 1,072 | 1,091 | 1,063 |
|  | GGU 006830 | 1.1 | 876 | 904   | 927   | 989   | 950   | 1,023 | 1,091 | 1,091 | -     | 1,232 | 1,199 |
|  | GGU 006630 | 1.0 | 999 | 1,034 | 1,063 | 1,141 | 1,091 | 1,183 | 1,268 | 1,268 | 1,416 | 1,445 | 1,402 |

#### Recommended blinds and shutters

|                         |                                  |     |     |     |     |     |     |     |     |     |     |     |
|-------------------------|----------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| MSL 5060                | Solar Anti-heat blind (exterior) | 252 | 270 | 278 | 290 | 288 | 302 | 318 | 328 | 344 | 350 | 348 |
| DSL Standard Collection | Solar Blackout blind (interior)  | 184 | 190 | 198 | 204 | 202 | 208 | 214 | 218 | 226 | 232 | 234 |

### Electric centre-pivot

#### White maintenance-free

|  |             |     |     |       |       |       |       |       |       |       |       |       |       |
|--|-------------|-----|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|  | GGU 007021U | 1.3 | 794 | 818   | 837   | 888   | 855   | 917   | 973   | 973   | 1,072 | 1,091 | 1,063 |
|  | GGU 006821U | 1.1 | 876 | 904   | 927   | 989   | 950   | 1,023 | 1,091 | 1,091 | 1,210 | 1,232 | 1,199 |
|  | GGU 006621U | 1.0 | 999 | 1,034 | 1,063 | 1,141 | 1,091 | 1,183 | 1,268 | -     | 1,416 | 1,445 | 1,402 |

#### Recommended blinds and shutters

|                         |                                     |     |     |     |     |     |     |     |     |     |     |     |
|-------------------------|-------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| MML 5060                | Electric Anti-heat blind (exterior) | 252 | 270 | 278 | 290 | 288 | 302 | 318 | 328 | 344 | 350 | 348 |
| DML Standard Collection | Electric Blackout blind (interior)  | 184 | 190 | 198 | 204 | 202 | 208 | 214 | 218 | 226 | 232 | 234 |

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://www.velux.co.uk)






# Manual centre-pivot

Centre-pivot roof window: GGU and GGL

The classic VELUX roof window is operated by a neatly designed and convenient top control bar that allows you to open and close the roof window even with furniture placed underneath it. It also features a ventilation flap so you can air out your space while the roof window is closed.

- Convenient top opening with integrated ventilation.
- Ventilation filter protects against dust and insects.
- Easy to rotate the roof window and clean the outer glass.
- Easily add blinds by simply clicking them into the patented mounting brackets.

## Roof pitch



## Interior finish options

|  |                                                                                                                               |
|--|-------------------------------------------------------------------------------------------------------------------------------|
|  | <b>Recommended</b><br><b>White maintenance-free</b><br>The most durable and robust finish that is completely maintenance-free |
|  | <b>White painted</b><br>High quality natural pine treated with a water-based white paint for a discreet wood grain look       |

| Glazing options      | Double glazing<br>--70 | Triple glazing<br>--68 | Triple glazing<br>--66 | Triple glazing<br>--62 |
|----------------------|------------------------|------------------------|------------------------|------------------------|
| Rain noise reduction | ✓                      | ✓                      | ✓                      | ✓                      |
| Safety lamination    | ✓                      | ✓                      | ✓                      | ✓                      |
| Toughened glass      | ✓                      | ✓                      | ✓                      | ✓                      |
| UV filter            | ✓                      | ✓                      | ✓                      | ✓                      |
| Easy-to-clean        |                        |                        | ✓                      |                        |
| Anti-dew             |                        |                        | ✓                      | ✓                      |

|                                                          |     |     |     |     |
|----------------------------------------------------------|-----|-----|-----|-----|
| Thermal transmittance of glazing (U <sub>g</sub> -value) | 1.0 | 0.7 | 0.6 | 0.5 |
|----------------------------------------------------------|-----|-----|-----|-----|

Read more about glazing specifications on page 162.

## Blinds and shutters

- Consider interior blinds for light control, and exterior Anti-heat blinds or shutters for added heat protection.

Read more on page 89.

## Out-of-reach

- If your roof window is out-of-reach, we recommend a solar or electric roof window.

Read more on page 28.



|                               | U <sub>w</sub> -VALUE | CK02  | CK04  | CK06   | FK06   | MK04  | MK06   | MK08   | PK06   | PK08   | SK06    | UK04   |
|-------------------------------|-----------------------|-------|-------|--------|--------|-------|--------|--------|--------|--------|---------|--------|
| External frame sizes (w×h) cm | W/m² K                | 55×78 | 55×98 | 55×118 | 66×118 | 78×98 | 78×118 | 78×140 | 94×118 | 94×140 | 114×118 | 134×98 |
|                               |                       |       |       |        |        |       |        |        |        |        |         |        |

### White maintenance-free

|  |            |      |     |     |     |     |     |     |       |       |       |       |       |
|--|------------|------|-----|-----|-----|-----|-----|-----|-------|-------|-------|-------|-------|
|  | GGU 0070   | 1.3  | 410 | 434 | 453 | 504 | 471 | 533 | 589   | 589   | 688   | 707   | 679   |
|  | GGU 0068   | 1.1  | 492 | 520 | 543 | 605 | 566 | 639 | 707   | 707   | 826   | 848   | 815   |
|  | GGU 0066   | 1.0  | 615 | 650 | 679 | 757 | 707 | 799 | 884   | 884   | 1,032 | 1,061 | 1,018 |
|  | GGU 0062   | 0.92 | 734 | 776 | 810 | 903 | 844 | 953 | 1,055 | 1,055 | 1,232 | 1,266 | -     |
|  | GGU 0070Q* | 1.3  | 573 | 597 | -   | 667 | 634 | 696 | 752   | 752   | 851   | 870   | 842   |

### White painted

|  |            |      |     |     |     |     |     |     |     |     |       |       |     |
|--|------------|------|-----|-----|-----|-----|-----|-----|-----|-----|-------|-------|-----|
|  | GGL 2070   | 1.3  | 365 | 385 | 402 | 448 | 419 | 473 | 524 | 524 | 612   | 629   | 603 |
|  | GGL 2068   | 1.1  | 437 | 463 | 483 | 538 | 503 | 568 | 629 | 629 | 734   | 754   | 724 |
|  | GGL 2066   | 1.0  | 547 | 578 | 603 | 672 | 629 | 710 | 786 | 786 | 918   | 943   | 905 |
|  | GGL 2062   | 0.96 | 653 | 690 | 720 | 803 | 750 | 848 | 938 | 938 | 1,095 | 1,125 | -   |
|  | GGL 2070Q* | 1.3  | 528 | 548 | -   | 611 | 582 | 636 | 687 | 687 | 775   | 792   | 766 |

### Recommended blinds and shutters

|                         |                                  |     |     |     |     |     |     |     |     |     |     |     |
|-------------------------|----------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| MSL 5060                | Solar Anti-heat blind (exterior) | 252 | 270 | 278 | 290 | 288 | 302 | 318 | 328 | 344 | 350 | 348 |
| DSL Standard Collection | Solar Blackout blind (interior)  | 184 | 190 | 198 | 204 | 202 | 208 | 214 | 218 | 226 | 232 | 234 |

\* Special enhanced security window fitted with toughened laminated glass combined with a reinforced construction and extra locks.






# Electric top-hung

Top-hung roof window: GPU

This electrically operated top-hung roof window is designed for a panoramic view. With one touch of the wall switch, the roof window opens outwards, giving you a balcony-like feeling. The integrated rain sensor automatically closes the roof window when the weather changes, so you never have to worry about leaving the roof window open when airing out.

- Automatic rain sensor closes the roof window when it rains.
- Full 45° opening allows for stunning views.
- Provides fresh air, better indoor comfort and home security.
- Basic wall switch included, see page 24.

## Roof pitch



## Interior finish options

**Recommended**

**White maintenance-free**

The most durable and robust finish that is completely maintenance-free

## Glazing options

|                                                          | Double glazing<br>--70 | Triple glazing<br>--66 |
|----------------------------------------------------------|------------------------|------------------------|
| Rain noise reduction                                     | ✓                      | ✓                      |
| Safety lamination                                        | ✓                      | ✓                      |
| Toughened glass                                          | ✓                      | ✓                      |
| UV filter                                                | ✓                      | ✓                      |
| Easy-to-clean                                            |                        | ✓                      |
| Anti-dew                                                 |                        | ✓                      |
| Thermal transmittance of glazing (U <sub>g</sub> -value) | 1.0                    | 0.6                    |

Read more about glazing specifications on page 162.

## Compatibility

- VELUX electric top-hung roof window is only compatible with manual or solar-powered blinds.
- Not compatible with twin flashings and insulated replacement flashings.

## Blinds and shutters

- Consider interior blinds for light control, and exterior Anti-heat blinds or shutters for added heat protection.

Read more on page 89.

## Remotes and Apps

- Easily control your VELUX electric products with our remote controls or apps.

- Free App Control included. Read more at [velux.co.uk/freeapp](https://velux.co.uk/freeapp)



| External frame sizes (w×h) cm | U <sub>w</sub> -VALUE<br>W/m² K | FK06<br>66×118 | FK08<br>66×140 | MK06<br>78×118 | MK08<br>78×140 | PK06<br>94×118 | PK08<br>94×140 | SK06<br>114×118 | SK08<br>114×140 |
|-------------------------------|---------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------|-----------------|
|                               |                                 |                |                |                |                |                |                |                 |                 |

| White maintenance-free                                                                         |             |     |       |       |       |       |       |       |       |       |
|------------------------------------------------------------------------------------------------|-------------|-----|-------|-------|-------|-------|-------|-------|-------|-------|
|  Electric | GPU 007021U | 1.3 | 1,186 | 1,234 | 1,215 | 1,271 | 1,271 | 1,370 | 1,389 | 1,431 |
|                                                                                                | GPU 006621U | 1.0 | 1,439 | 1,509 | 1,481 | 1,566 | 1,566 | 1,714 | 1,743 | 1,806 |
| Profile set*                                                                                   |             |     | WK06  | WK08  | WK06  | WK08  | WK06  | WK08  | WK06  | WK08  |
| ZWP WK06 0000                                                                                  |             |     | 57    | -     | 57    | -     | 57    | -     | 57    | -     |
| ZWP WK08 0000                                                                                  |             |     | -     | 60    | -     | 60    | -     | 60    | -     | 60    |

| Recommended blinds and shutters |                                     |     |     |     |     |     |     |     |     |
|---------------------------------|-------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|
| MML 5060**                      | Electric Anti-heat blind (exterior) | 290 | 302 | 302 | 318 | 328 | 344 | 350 | 376 |
| DSL Standard Collection         | Solar Blackout blind (interior)     | 204 | 208 | 208 | 214 | 218 | 226 | 232 | 236 |

\* Required for recessed installations of electric top-hung roof windows (EDN and EDJ flashing kits).

\*\* ZOZ 229S needed for installation on GPU electric.

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://velux.co.uk)





# Manual top-hung


Top-hung roof window: GPU and GPL

Use the elegant handle at the bottom to open the roof window outwards, lean out and enjoy a panoramic view of the outdoors with the VELUX top-hung roof window. The outward-opening roof window creates a balcony-like feel when opened and is our recommended choice for loft conversions. It also features a ventilation bar, allowing you to air out your space while the roof window remains closed.

- Easy opening for a panoramic view.
- Ventilation filter protects against dust and insects.
- Easy to rotate the roof window and clean the outer glass.
- Easily add blinds by simply clicking them into the pre-fitted mounting brackets.

Find EPDs at [velux.co.uk/technical-library](https://www.velux.co.uk/technical-library)

## Roof pitch



Suitable for roof pitches between 15° and 55°  
Also suitable for roof pitches between 55° and 75° with special springs. Please specify when ordering

## Interior finish options



**Recommended**  
**White maintenance-free**  
The most durable and robust finish that is completely maintenance-free



**White painted**  
High quality natural pine treated with a water-based white paint for a discreet wood grain look

| Glazing options                                          | Double glazing<br>--70 | Triple glazing<br>--68 | Triple glazing<br>--66 |
|----------------------------------------------------------|------------------------|------------------------|------------------------|
| Rain noise reduction                                     | ✓                      | ✓                      | ✓                      |
| Safety lamination                                        | ✓                      | ✓                      | ✓                      |
| Toughened glass                                          | ✓                      | ✓                      | ✓                      |
| UV filter                                                | ✓                      | ✓                      | ✓                      |
| Easy-to-clean                                            |                        |                        | ✓                      |
| Anti-dew                                                 |                        |                        | ✓                      |
| Thermal transmittance of glazing (U <sub>g</sub> -value) | 1.0                    | 0.7                    | 0.6                    |

Read more about glazing specifications on page 162.

## Blinds and shutters

- Consider interior blinds for light control, and exterior Anti-heat blinds or shutters for added heat protection.

Read more on page 89.

## Out-of-reach

- If your roof window is out-of-reach, we recommend solar or electric roof windows.

Read more on page 28.



| External frame sizes (w×h) cm |          | U <sub>w</sub> -VALUE<br>W/m² K | CK04<br>55×98 | CK06▲<br>55×118 | FK06▲<br>66×118 | MK04▲<br>78×98 | MK06▲<br>78×118 | MK08▲<br>78×140 | PK06▲<br>94×118 | PK08▲<br>94×140 | PK10▲<br>94×160 | SK06▲<br>114×118 | UK04▲<br>134×98 |
|-------------------------------|----------|---------------------------------|---------------|-----------------|-----------------|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------------------|-----------------|
|                               |          |                                 |               |                 |                 |                |                 |                 |                 |                 |                 |                  |                 |
| White maintenance-free        |          |                                 |               |                 |                 |                |                 |                 |                 |                 |                 |                  |                 |
| Manual                        | GPU 0070 | 1.3                             | 629           | 648             | 699             | 666            | 728             | 784             | 784             | 883             | 921             | 902              | -               |
|                               | GPU 0068 | 1.1                             | 715           | 738             | 800             | 761            | 834             | 902             | 902             | 1,021           | 1,066           | 1,043            | -               |
|                               | GPU 0066 | 1.0                             | 845           | 874             | 952             | 902            | 994             | 1,079           | 1,079           | 1,227           | 1,284           | 1,256            | -               |
|                               | GPU 0062 | 0.96                            | 971           | 1,005           | 1,098           | 1,039          | 1,148           | 1,250           | 1,250           | 1,427           | 1,494           | 1,461            | -               |
| White painted                 |          |                                 |               |                 |                 |                |                 |                 |                 |                 |                 |                  |                 |
| Manual                        | GPL 2070 | 1.3                             | 580           | 597             | 643             | 614            | 668             | 719             | 719             | 807             | 840             | 824              | 798             |
|                               | GPL 2068 | 1.1                             | 658           | 678             | 733             | 698            | 763             | 824             | 824             | 929             | 969             | 949              | 919             |
|                               | GPL 2066 | 1.0                             | 773           | 798             | 867             | 824            | 905             | 981             | 981             | 1,113           | 1,163           | 1,138            | 1,100           |

| Recommended blinds and shutters |                                  | MSL 5060 | DSL Standard Collection | DKL Standard Collection |
|---------------------------------|----------------------------------|----------|-------------------------|-------------------------|
| Manual                          | Solar Anti-heat blind (exterior) | 270      | 278                     | 290                     |
|                                 | Solar Blackout blind (interior)  | 190      | 198                     | 204                     |
|                                 | Manual Blackout blind (interior) | 78       | 86                      | 92                      |

▲ Sizes suitable for emergency escape requirements. All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://www.velux.co.uk)





# Manual centre-pivot for low pitch roofs

Made for homes with low pitches (10°-20°): GBL

Perfect for bringing daylight and fresh air into single-storey extensions, the Low pitch roof window is the best solution for roofs with a pitch between 10°-20°. The product is designed to be fully watertight at a low pitch and features glass-to-edge technology, ensuring a seamless and aesthetic installation.

- Tested in one of northern Europe's largest wind tunnels for wind and water resistance.
- Fast and simple installation.
- Available with EDG flashing for profiled tiles ranging from 15mm to 120mm, approved for roof pitches between 10° and 20°.
- Available with EDQ flashing for click metal roofs with standing seams ranging between 25mm to 35mm, approved for roof pitches between 10° and 20°.

Find EPDs at [velux.co.uk/technical-library](https://www.velux.co.uk/technical-library)

## Roof pitch



## Interior finish options

**White painted**  
High quality natural pine treated with a water-based white paint for a discreet wood grain look

## Glazing options

|                                                          |                      | Triple glazing --15 |
|----------------------------------------------------------|----------------------|---------------------|
|                                                          | Rain noise reduction | ✓                   |
|                                                          | Safety lamination    | ✓                   |
|                                                          | Toughened glass      | ✓                   |
|                                                          | UV filter            | ✓                   |
|                                                          | Easy-to-clean        |                     |
|                                                          | Anti-dew             |                     |
| Thermal transmittance of glazing (U <sub>g</sub> -value) |                      | 0.7                 |

Read more about glazing specifications on page 162.

## Blinds and shutters

- Consider interior blinds for light control, and exterior Anti-heat blinds or shutters for added heat protection.

Read more on page 89.

## Upgrade to a solar roof window

- Upgrade to a solar roof window with the conversion kit (KSX). Includes a rain sensor that closes the roof window when it rains.
- Compatible with all sizes except SK01.

Read more on page 148.



| External frame sizes (w×h) cm | U <sub>w</sub> -VALUE | CK04  | MK04  | MK06   | MK08   | PK04  | SK01   | SK06    |
|-------------------------------|-----------------------|-------|-------|--------|--------|-------|--------|---------|
|                               | W/m² K                | 55×98 | 78×98 | 78×118 | 78×140 | 94×98 | 114×70 | 114×118 |
|                               |                       |       |       |        |        |       |        |         |

| White painted |              |                                       |     |     |     |     |     |     |     |       |
|---------------|--------------|---------------------------------------|-----|-----|-----|-----|-----|-----|-----|-------|
|               | GBL S10G03*  | For profiled tiles up to 120mm        | 1.3 | 646 | 708 | 786 | 861 | 800 | 908 | 1,015 |
|               | GBL S10G05** | For click metal roofs between 25-35mm | 1.3 | 623 | 682 | 758 | 832 | 771 | -   | 982   |

| Recommended blinds and shutters |                                  |  |  |    |    |    |     |     |     |     |
|---------------------------------|----------------------------------|--|--|----|----|----|-----|-----|-----|-----|
| DKL Standard Collection         | Manual Blackout blind (interior) |  |  | 78 | 90 | 96 | 102 | 102 | 110 | 120 |

\* Package includes roof window, flashing, Insulation BDx and Underfelt collar BFX suitable for installation into profiled tiles up to 120mm.

\*\* Package includes window, EDQ flashing, underfelt collar and insulation collar BDx suitable for installation into click metal roofs between 25-35mm.

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://www.velux.co.uk)






# Heritage conservation roof window

Ideal for heritage, conservation and historical properties: GCL

The Heritage conservation roof window is designed to be in keeping with heritage aesthetics of historical buildings. Slim, elegant and sitting flush to the slates, it blends beautifully into the roofing materials. Thoughtfully co-created with Architects and Conservation Officers, it enhances modern living, while maintaining the building's original character.

- Sleek, slim-fit profile for an appearance in line with historic heritage.
- Authentic top-hung design.
- Crafted glass-to-edge technology for a clean appearance.
- Central glazing bar for period authenticity.
- Flashing set for slate, plain and profiled tile roofs, for simple installation (no need for manual lead flashing).
- Original hand-winder for natural ventilation.

## Roof pitch



## Interior finish options



**White painted**  
High quality natural pine treated with a water-based white paint for a discreet wood grain look

## Glazing options

|  |                      | Double glazing<br>--01 |
|--|----------------------|------------------------|
|  | Rain noise reduction | ✓                      |
|  | Safety lamination    | ✓                      |
|  | Toughened glass      | ✓                      |
|  | UV filter            | ✓                      |
|  | Easy-to-clean        | ✓                      |
|  | Anti-dew             |                        |

Thermal transmittance of glazing ( $U_g$ -value) 1.1

Read more about glazing specifications on page 162.

## New glazing

- New high performance glazing with excellent energy efficiency available from Autumn 2026.



Scan for more information from Summer 2026.

## Blinds

- Compatible with translucent and blackout pleated blinds FHL and FHC for full control over light levels.

Read more on page 89.

## Installation

- Flashing set for easier and faster installation, no time-consuming customisation with lead required.
- Can be installed from the inside or outside for ultimate convenience.

Read more on page 69.

## More daylight

- Up to 16% more daylight than VELUX Conservation roof window (GGL/GPL 2570H).



| External frame sizes (w×h) cm | <b>U<sub>w</sub>-value</b> | <b>CC04</b> | <b>CC06</b> | <b>FC06</b> | <b>FC08</b> | <b>MC06</b> | <b>MC08</b> | <b>PC08</b> | <b>SC08</b> | <b>SC10</b> |
|-------------------------------|----------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
|                               | W/m² K                     | 55×98       | 55×118      | 66×118      | 66×140      | 78×118      | 78×140      | 94×140      | 114×140     | 114×160     |
|                               |                            |             |             |             |             |             |             |             |             |             |

### Top-hung white painted

|  |        |           |     |     |     |     |     |     |       |       |       |       |
|--|--------|-----------|-----|-----|-----|-----|-----|-----|-------|-------|-------|-------|
|  | Manual | GCL 2501H | 1.3 | 771 | 804 | 897 | 980 | 947 | 1,048 | 1,223 | 1,332 | 1,475 |
|--|--------|-----------|-----|-----|-----|-----|-----|-----|-------|-------|-------|-------|

### Pro flashing set including Underfelt collar (BFX)

|          |                                           |     |     |     |     |     |     |     |     |     |
|----------|-------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| EDU 1500 | For slate or plain tiles up to 14mm       | 209 | 218 | 234 | 246 | 246 | 262 | 293 | 309 | 321 |
| EDV 1500 | For profiled roofing materials up to 90mm | 209 | 218 | 234 | 246 | 246 | 262 | 293 | 309 | 321 |

### Recommended interior blinds

|  |            |          |                                |     |     |     |     |     |     |     |     |     |
|--|------------|----------|--------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|  | FHC Manual | Standard | Blackout energy pleated blinds | 102 | 112 | 120 | 124 | 124 | 134 | 150 | 162 | 180 |
|  | FHL Manual | Standard | Translucent pleated blinds     | 90  | 100 | 106 | 110 | 110 | 118 | 132 | 144 | 160 |

All prices in GBP (£)  
Find all sizes and prices at velux.co.uk





# Conservation roof window



The contemporary choice for traditional properties: GGL H and GPL H

The Conservation roof window is the perfect combination of the past and present. The roof window's black exterior profile and glazing bar blend seamlessly into the roof to match the building's original characteristics.

Its additional features offer you the same convenience as a standard VELUX roof window.

- Traditional external appearance.
- A choice of centre-pivot or top-hung opening styles to suit your space.
- Top control bar with integrated ventilation.
- Fresh air even when the roof window is closed.
- Pivot function for easy cleaning.

## Roof pitch



The top-hung roof window is suitable for roof pitches between 15°-55°, also suitable for roof pitches between 55° and 75° with special springs. Please specify when ordering.

## Interior finish options

**White painted**

High quality natural pine treated with a water-based white paint for a discreet wood grain look

| Glazing options                                          |                      | Double glazing -- 70 |
|----------------------------------------------------------|----------------------|----------------------|
|                                                          | Rain noise reduction | ✓                    |
|                                                          | Safety lamination    | ✓                    |
|                                                          | Toughened glass      | ✓                    |
|                                                          | UV filter            | ✓                    |
|                                                          | Easy-to-clean        |                      |
|                                                          | Anti-dew             |                      |
| Thermal transmittance of glazing (U <sub>g</sub> -value) |                      | 1.0                  |

Read more about glazing specifications on page 162.

## Blinds and shutters

- Consider interior blinds for light control, and exterior Anti-heat blinds or shutters for added heat protection.

Read more on page 89.

## Upgrade to a solar roof window

- Upgrade to a solar roof window with the conversion kit (KSX). Includes a rain sensor that closes the roof window when it rains.
- Compatible with centre-pivot Conservation roof windows (GGL).

Read more on page 148.



| External frame sizes (w×h) cm | U <sub>w</sub> -VALUE | CK04  | CK06   | FK06   | MK06   | MK08   | UK04   |
|-------------------------------|-----------------------|-------|--------|--------|--------|--------|--------|
|                               | W/m² K                | 55×98 | 55×118 | 66×118 | 78×118 | 78×140 | 134×98 |
|                               |                       |       |        |        |        |        |        |

| Centre-pivot white painted                                                                   |            |                                                                                        |     |     |     |     |     |     |       |
|----------------------------------------------------------------------------------------------|------------|----------------------------------------------------------------------------------------|-----|-----|-----|-----|-----|-----|-------|
|  Manual | GGL SD5N2  | GGL 2570 roof window + EDN recessed flashing for slate up to 8mm thick (min 20°)       | 1.3 | 741 | 768 | 853 | 903 | 971 | 1,143 |
|                                                                                              | GGL S15P01 | GGL 2570 roof window + EDP flashing for plain tiles up to 14mm thick (min 25°)         | 1.3 | 657 | 680 | 759 | 804 | 866 | 1,018 |
|                                                                                              | GGL S15W01 | GGL 2570 roof window + EDW flashing for tiles up to 120mm in profile (min 15°)         | 1.3 | 657 | 680 | 759 | 804 | 866 | 1,018 |
|                                                                                              | GGL SD5J2  | GGL 2570 roof window + EDJ recessed flashing for tiles up to 90mm in profile (min 20°) | 1.3 | 735 | 762 | 847 | 896 | 964 | 1,134 |

| Top-hung white painted                                                                       |            |                                                                                        |     |   |   |   |   |       |   |
|----------------------------------------------------------------------------------------------|------------|----------------------------------------------------------------------------------------|-----|---|---|---|---|-------|---|
|  Manual | GPL SD5N2  | GPL 2570 roof window + EDN recessed flashing for slate up to 8mm thick (min 20°)       | 1.3 | - | - | - | - | 1,166 | - |
|                                                                                              | GPL S15P01 | GPL 2570 roof window + EDP flashing for plain tiles up to 14mm thick (min 25°)         | 1.3 | - | - | - | - | 1,061 | - |
|                                                                                              | GPL S15W01 | GPL 2570 roof window + EDW flashing for tiles up to 120mm in profile (min 15°)         | 1.3 | - | - | - | - | 1,061 | - |
|                                                                                              | GPL SD5J2  | GPL 2570 roof window + EDJ recessed flashing for tiles up to 90mm in profile (min 20°) | 1.3 | - | - | - | - | 1,159 | - |

| Recommended blinds and shutters |                                  |    |    |    |    |     |     |
|---------------------------------|----------------------------------|----|----|----|----|-----|-----|
| DKL Standard Collection         | Manual Blackout blind (interior) | 78 | 86 | 92 | 96 | 102 | 122 |

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://www.velux.co.uk)




# Combine your roof windows

Add additional roof windows and instantly improve the feeling of space and openness in your home.


It is easy to combine multiple roof windows to expand your view and bring more daylight and fresh air in. Select from our recommended solutions or create your own from virtually any combination of VELUX roof windows.

- Create a solution that meets your specific needs.
- Enjoy enhanced views and more daylight.
- Benefit from an enhanced feeling of spaciousness.

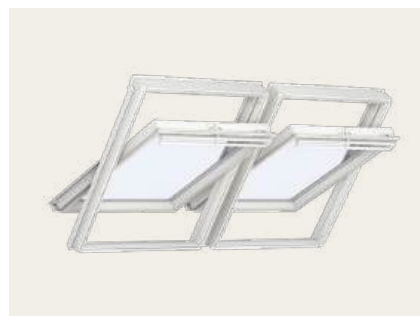


## Integrated side-by-side and triple

Add extra wow factor to your room with our side-by-side and triple combinations. These solutions feature adjacent roof windows that provide more daylight and allow you to enjoy panoramic views to the world outside.

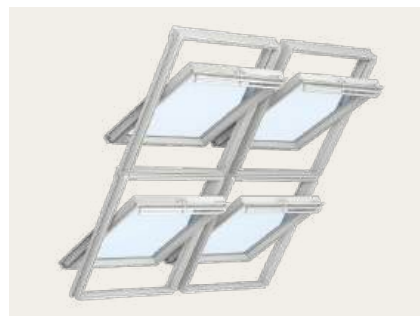

## Quattro

This four roof window solution creates a stunning centrepiece around your outdoor view and dramatically increases the amount of daylight and sense of space in your room.

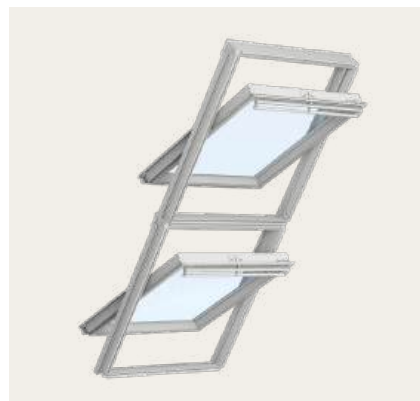

## Duo

Ideal for narrow spaces, such as above stairs, this solution maximises daylight in often dark and overlooked spaces. Enhance the feeling of space and create a beautiful architectural feature.







# Integrated side-by-side

An integrated solution with no intrusive rafter

Where there is room for one roof window, there is often room for two. The VELUX Integrated side-by-side solution features adjacent roof windows that create a stunning architectural feature. Flood your room with light and enjoy a feeling of spaciousness.

By trimming the rafter, you reduce the amount of protruding wall between the roof windows to ensure a more integrated roof window with an elegant end result.

The all-in-one installation package contains everything you need for hassle-free installation, including a flat click-on cover plate for the frame gap between the roof windows.


Find EPDs at [velux.co.uk/technical-library](https://www.velux.co.uk/technical-library)

## Roof pitch




## Details

- The Integrated side-by-side provides a more elegant finish with no intrusive rafter between the roof windows.
- Installation principle in roof construction.



## Flashing



### The flashing set contains

- Flashing
- Insulation collar, BDx
- Underfelt collar, BFX
- Cover plate
- Bearing beams

## Blinds and shutters

- Consider interior blinds for light control, and exterior Anti-heat blinds or shutters for added heat protection.

Read more on page 89.

## Remotes and Apps

Easily control your VELUX solar and electric products with our remote controls or apps.

Free App Control included. Read more at [velux.co.uk/freeapp](https://www.velux.co.uk/freeapp)



## Popular combinations

|                                          | UNITS | FK06   | MK04  | MK06   | MK08   | PK06   | PK08   | PK10   | SK06    | SK08    | UK04   | UK08    |
|------------------------------------------|-------|--------|-------|--------|--------|--------|--------|--------|---------|---------|--------|---------|
| Individual external frame sizes (w×h) cm |       | 66×118 | 78×98 | 78×118 | 78×140 | 94×118 | 94×140 | 94×160 | 114×118 | 114×140 | 134×98 | 134×140 |
|                                          |       |        |       |        |        |        |        |        |         |         |        |         |

## Roof window example

|          |   |     |     |     |     |     |     |     |     |     |     |     |
|----------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| GGU 0070 | 2 | 504 | 471 | 533 | 589 | 589 | 688 | 726 | 707 | 749 | 679 | 825 |
|----------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|

## Flashing for 18mm frame distance

|             |                                           |   |     |     |     |     |     |     |     |     |     |     |     |
|-------------|-------------------------------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| EBW 4021B2* | For profiled roofing material up to 120mm | 1 | 554 | 547 | 578 | 613 | 635 | 668 | 690 | 685 | 724 | 711 | 772 |
| EBL 4021B2* | For slate up to 8mm thick                 | 1 | 554 | 547 | 578 | 613 | 635 | 668 | 690 | 685 | 724 | 711 | 772 |

## Flashing for 100mm frame distance

|             |                                           |   |     |     |     |     |     |     |     |     |     |     |     |
|-------------|-------------------------------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| EKW 4021E2* | For profiled roofing material up to 120mm | 1 | 535 | 528 | 558 | 592 | 612 | 644 | 666 | 661 | 698 | 685 | 745 |
| EKL 4021E2* | For slate up to 8mm thick                 | 1 | 535 | 528 | 558 | 592 | 612 | 644 | 666 | 661 | 698 | 685 | 745 |

## Total price example

|                                                   |   |       |       |       |       |       |       |       |       |       |       |       |
|---------------------------------------------------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Roof windows, flashings and installation products | 3 | 1,543 | 1,470 | 1,624 | 1,770 | 1,790 | 2,020 | 2,118 | 2,075 | 2,196 | 2,043 | 2,395 |
|---------------------------------------------------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|

## Recommended blinds and shutters

|          |                                  |   |     |     |     |     |     |     |     |     |     |     |     |
|----------|----------------------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| MSL 5060 | Solar Anti-heat blind (exterior) | 2 | 290 | 288 | 302 | 318 | 328 | 344 | 362 | 350 | 376 | 348 | 406 |
|----------|----------------------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|

\* Includes installation products (BDX 2000, bearing beams and cover plate). All prices in GBP (£)  
Find all flashing types, sizes and prices at [velux.co.uk](https://www.velux.co.uk)





# Integrated triple

An integrated solution with no intrusive rafters

Add extra wow factor to your room with the VELUX Integrated triple solution. This solution features three adjacent roof windows providing even more daylight and allowing you to enjoy a widescreen panoramic view to the world outside.

By trimming the rafter, you reduce the protruding wall between the roof windows, resulting in a more integrated look and an elegant end result.

The all-in-one installation package contains everything you need for hassle-free installation, including flat click-on cover plate for frame gaps between the roof windows.


Find EPDs at [velux.co.uk/technical-library](https://www.velux.co.uk/technical-library)

## Roof pitch




## Details

- The Integrated triple solution provides a more elegant finish with no intrusive rafter between the roof windows.
- Installation principle in roof construction.

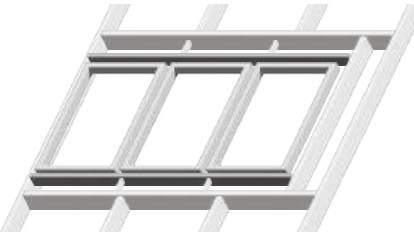

## Flashing



### The flashing set contains

- Flashing
- Insulation collar, BDX
- Underfelt collar, BFX
- Cover plates
- Bearing beams

## Blinds and shutters

- Consider interior blinds for light control, and exterior Anti-heat blinds or shutters for added heat protection.

Read more on page 89.

## Remotes and Apps

Easily control your VELUX solar and electric products with our remote controls or apps.

Free App Control included. Read more at [velux.co.uk/freeapp](https://www.velux.co.uk/freeapp)



### Popular combinations

|                                          | UNITS | FK06   | MK04  | MK06   | MK08   | PK08   | PK10   | SK06    | UK04   | UK08    |
|------------------------------------------|-------|--------|-------|--------|--------|--------|--------|---------|--------|---------|
| Individual external frame sizes (w×h) cm |       | 66×118 | 78×98 | 78×118 | 78×140 | 94×140 | 94×160 | 114×118 | 134×98 | 134×140 |
|                                          |       |        |       |        |        |        |        |         |        |         |

### Roof window example

|          |   |     |     |     |     |     |     |     |     |     |
|----------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| GGU 0070 | 3 | 504 | 471 | 533 | 589 | 688 | 726 | 707 | 679 | 825 |
|----------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|

### Flashing for 18mm frame distance

|             |                                           |   |     |     |     |       |   |   |   |   |
|-------------|-------------------------------------------|---|-----|-----|-----|-------|---|---|---|---|
| EBW 4031B2* | For profiled roofing material up to 120mm | 1 | 915 | 901 | 956 | 1,018 | - | - | - | - |
| EBL 4031B2* | For slate up to 8mm thick                 | 1 | 915 | 901 | 956 | 1,018 | - | - | - | - |

### Flashing for 100mm frame distance

|              |                                           |   |     |     |     |       |     |     |     |     |
|--------------|-------------------------------------------|---|-----|-----|-----|-------|-----|-----|-----|-----|
| EKW 4031E2*  | For profiled roofing material up to 120mm | 1 | 887 | 873 | 926 | 986   | -   | -   | -   | -   |
| EKL 4031E2*  | For slate up to 8mm thick                 | 1 | 887 | 873 | 945 | 1,002 | -   | -   | -   | -   |
| EKW 3031E2** | For profiled roofing material up to 120mm | 1 | -   | -   | -   | -     | 837 | 875 | 800 | 798 |
| EKL 3031E2** | For slate up to 8mm thick                 | 1 | -   | -   | -   | -     | 837 | 875 | 800 | 798 |

### Total price example

|                                                   |   |       |       |       |       |       |       |       |       |       |
|---------------------------------------------------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Roof windows, flashings and installation products | 4 | 2,399 | 2,286 | 2,525 | 2,753 | 2,901 | 3,053 | 2,921 | 2,835 | 3,379 |
|---------------------------------------------------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|

### Recommended blinds and shutters

|          |                                  |   |     |     |     |     |     |     |     |     |     |
|----------|----------------------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| MSL 5060 | Solar Anti-heat blind (exterior) | 3 | 290 | 288 | 302 | 318 | 344 | 362 | 350 | 348 | 406 |
|----------|----------------------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|

\* Includes installation products (BDX 2000, bearing beams and cover plates).

\*\* Includes installation products (BDX 2000 and cover plates).

All prices in GBP (£)  
Find all flashing types, sizes and prices at [velux.co.uk](https://www.velux.co.uk)





# Quattro

Double-height expansive view

The VELUX Quattro combination takes the traditional side-by-side installation and doubles it for even more daylight and fantastic floor-to-ceiling views. This four roof window solution creates a dramatic centrepiece, increasing the amount of daylight and the feeling of spaciousness in your room.


- Floor-to-ceiling views and more daylight.
- Increases the feeling of spaciousness.

Find EPDs at [velux.co.uk/technical-library](https://www.velux.co.uk/technical-library)

## Roof pitch



## Combination elements

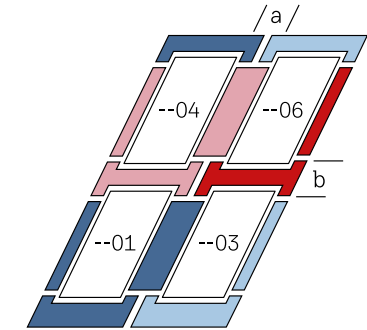

For combination and frame distance see page 80.

## Fully customisable

- Available in centre-pivot and top-hung variants.
- Choose from a wide range of sizes.
- Available in our recommended white maintenance-free finish and white painted.

## Blinds and shutters

- Consider interior blinds for light control, and exterior Anti-heat blinds or shutters for added heat protection.

Read more on page 89.

## Remotes and Apps

Easily control your VELUX solar and electric products with our remote controls or apps.

Free App Control included. Read more at [velux.co.uk/freeapp](https://www.velux.co.uk/freeapp)

## Flashing

- For further flashing information read more on page 69.



### Popular combinations

|                                          | UNITS | FK06   | MK04  | MK06   | MK08   | PK06   | PK08   | PK10   | SK06    | SK08    | UK04   | UK08    |
|------------------------------------------|-------|--------|-------|--------|--------|--------|--------|--------|---------|---------|--------|---------|
| Individual external frame sizes (w×h) cm |       | 66×118 | 78×98 | 78×118 | 78×140 | 94×118 | 94×140 | 94×160 | 114×118 | 114×140 | 134×98 | 134×140 |
|                                          |       |        |       |        |        |        |        |        |         |         |        |         |

### Roof window example

|          |   |     |     |     |     |     |     |     |     |     |     |     |
|----------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| GGU 0070 | 4 | 504 | 471 | 533 | 589 | 589 | 688 | 726 | 707 | 749 | 679 | 825 |
|----------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|

### Flashing for 100mm frame distance

|           |                                           |   |     |     |     |     |     |     |     |     |     |     |     |
|-----------|-------------------------------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| EKW S0229 | For profiled roofing material up to 120mm | 1 | 602 | 602 | 633 | 675 | 715 | 753 | 776 | 746 | 795 | 795 | 856 |
| EKL S0225 | For slate up to 8mm thick                 | 1 | 602 | 602 | 633 | 675 | 715 | 753 | 776 | 746 | 795 | 795 | 856 |

### Total price example

|                                                   |   |       |       |       |       |       |       |       |       |       |       |       |
|---------------------------------------------------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Roof windows, flashings and installation products | 5 | 2,618 | 2,486 | 2,765 | 3,031 | 3,071 | 3,505 | 3,680 | 3,574 | 3,791 | 3,511 | 4,156 |
|---------------------------------------------------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|

### Recommended blinds and shutters

|          |                                  |   |     |     |     |     |     |     |     |     |     |     |     |
|----------|----------------------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| MSL 5060 | Solar Anti-heat blind (exterior) | 4 | 290 | 288 | 302 | 318 | 328 | 344 | 362 | 350 | 376 | 348 | 406 |
|----------|----------------------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|

All prices in GBP (£)  
Find all flashing types, sizes and prices at [velux.co.uk](https://www.velux.co.uk)





# Duo


Ideal for narrow rooms

For narrow spaces, such as above stairs, a Duo combination of two VELUX roof windows draws more daylight deep into the room. By adding an additional roof window, you can enhance the feeling of spaciousness, maximise natural light and create an architectural feature in otherwise dark and overlooked spaces.

- Enhanced views and more daylight.
- Increases the feeling of spaciousness.


Find EPDs at [velux.co.uk/technical-library](https://www.velux.co.uk/technical-library)

## Roof pitch



EKW 15° - 90°  
EKL 15° - 90°

## Combination elements



For combination and frame distance see page 80.

## Fully customisable

- Available in centre-pivot and top-hung variants.
- Choose from a wide range of sizes.
- Available in our recommended white maintenance-free finish and white painted.

## Blinds and shutters

- Consider interior blinds for light control, and exterior Anti-heat blinds or shutters for added heat protection.

Read more on page 89.

## Remotes and Apps

Easily control your VELUX solar and electric products with our remote controls or apps.

Free App Control included. Read more at [velux.co.uk/freeapp](https://www.velux.co.uk/freeapp)

## Flashing

- For further flashing information read more on page 69.



### Popular combinations

|                                          | UNITS | FK06   | MK04  | MK06   | MK08   | PK06   | PK08   | PK10   | SK06    | SK08    | UK04   | UK08    |
|------------------------------------------|-------|--------|-------|--------|--------|--------|--------|--------|---------|---------|--------|---------|
| Individual external frame sizes (w×h) cm |       | 66×118 | 78×98 | 78×118 | 78×140 | 94×118 | 94×140 | 94×160 | 114×118 | 114×140 | 134×98 | 134×140 |
|                                          |       |        |       |        |        |        |        |        |         |         |        |         |

### Roof window example

|          |   |     |     |     |     |     |     |     |     |     |     |     |
|----------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| GGU 0070 | 2 | 504 | 471 | 533 | 589 | 589 | 688 | 726 | 707 | 749 | 679 | 825 |
|----------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|

### Flashing

|            |                                           |   |     |     |     |     |     |     |     |     |     |     |     |
|------------|-------------------------------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| EKW S00W02 | For profiled roofing material up to 120mm | 1 | 289 | 289 | 304 | 324 | 344 | 362 | 372 | 358 | 382 | 382 | 411 |
| EKL S00L02 | For slate up to 8mm thick                 | 1 | 289 | 289 | 304 | 324 | 344 | 362 | 372 | 358 | 382 | 382 | 411 |

### Total price example

|                                                   |   |       |       |       |       |       |       |       |       |       |       |       |
|---------------------------------------------------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Roof windows, flashings and installation products | 3 | 1,297 | 1,231 | 1,370 | 1,502 | 1,522 | 1,738 | 1,824 | 1,772 | 1,880 | 1,740 | 2,061 |
|---------------------------------------------------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|

### Recommended blinds and shutters

|          |                                  |   |     |     |     |     |     |     |     |     |     |     |     |
|----------|----------------------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| MSL 5060 | Solar Anti-heat blind (exterior) | 2 | 290 | 288 | 302 | 318 | 328 | 344 | 362 | 350 | 376 | 348 | 406 |
|----------|----------------------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|

All prices in GBP (£)  
Find all flashing types, sizes and prices at [velux.co.uk](https://www.velux.co.uk)





## Sloping and fixed

A sleek solution to increase your view: GIU and GIL

Extend your views with a fixed element that blends seamlessly with the roof window. The window element fills the sloping space between the floor and the bottom of the roof window to provide more expansive views and more natural daylight.


This is the ideal choice if you want to maximise your roof window area.

- Slim connection.
- Extends daylight area.
- Suitable for all rooms.

| External frame sizes (w×h) cm | U <sub>w</sub> -VALUE<br>W/m² K | FK34 | MK34  | PK34  | SK34  | UK34  |
|-------------------------------|---------------------------------|------|-------|-------|-------|-------|
|                               |                                 |      |       |       |       |       |
| <b>White maintenance-free</b> |                                 |      |       |       |       |       |
| GIU 0070                      | 1.3                             | 593  | 749   | 780   | 861   | 899   |
| GIU 0068                      | 1.1                             | 712  | 899   | 936   | 1,034 | 1,079 |
| GIU 0066                      | 1.0                             | 889  | 1,123 | 1,170 | 1,292 | 1,348 |
| <b>White painted</b>          |                                 |      |       |       |       |       |
| GIL 2070                      | 1.3                             | -    | 764   | 796   | 879   | 917   |
| GIL 2068                      | 1.1                             | -    | 917   | 955   | 1,055 | 1,101 |
| GIL 2066                      | 1.0                             | -    | 1,146 | 1,194 | 1,318 | 1,376 |

Find EPDs at [velux.co.uk/technical-library](https://www.velux.co.uk/technical-library) All prices in GBP (£)  
Find all types, sizes and prices at [velux.co.uk](https://www.velux.co.uk)

### Roof pitch



### Interior finish options

| Recommended |                                                                                                                         |
|-------------|-------------------------------------------------------------------------------------------------------------------------|
|             | <b>White maintenance-free</b><br>The most durable and robust finish that is completely maintenance-free                 |
|             | <b>White painted</b><br>High quality natural pine treated with a water-based white paint for a discreet wood grain look |

| Glazing options                                          | Double glazing<br>--70 | Triple glazing<br>--68 | Triple glazing<br>--66 |
|----------------------------------------------------------|------------------------|------------------------|------------------------|
| Rain noise reduction                                     | ✓                      | ✓                      | ✓                      |
| Safety lamination                                        | ✓                      | ✓                      | ✓                      |
| Toughened glass                                          | ✓                      | ✓                      | ✓                      |
| UV filter                                                | ✓                      | ✓                      | ✓                      |
| Easy-to-clean                                            |                        |                        | ✓                      |
| Anti-dew                                                 |                        |                        | ✓                      |
| Thermal transmittance of glazing (U <sub>g</sub> -value) | 1.0                    | 0.7                    | 0.6                    |

Read more about glazing specifications on page 162.

### Blinds and shutters

- Consider interior blinds for light control, and exterior Anti-heat blinds or shutters for added heat protection.

Read more on page 89

### Remotes and Apps

- Easily control your VELUX solar and electric products with our remote controls or apps.

- Free App Control included. Read more at [velux.co.uk/freeapp](https://www.velux.co.uk/freeapp)



### Popular combinations

|                               | UNITS | FK06   | MK04  | MK06   | MK08   | PK06   | PK08   | PK10   | SK06    | SK08    | UK04   | UK08    |
|-------------------------------|-------|--------|-------|--------|--------|--------|--------|--------|---------|---------|--------|---------|
| External frame sizes (w×h) cm |       | 66×118 | 78×98 | 78×118 | 78×140 | 94×118 | 94×140 | 94×160 | 114×118 | 114×140 | 134×98 | 134×140 |
|                               |       |        |       |        |        |        |        |        |         |         |        |         |

### Upper element, roof window example

|          |  |   |     |     |     |     |     |     |     |     |     |     |     |
|----------|--|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| GGU 0070 |  | 1 | 504 | 471 | 533 | 589 | 589 | 688 | 726 | 707 | 749 | 679 | 825 |
|----------|--|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|

### Pro+ flashing set including Insulation collar (BDX) and Underfelt collar (BFX)

|          |                                           |   |     |     |     |     |     |     |     |     |     |     |     |
|----------|-------------------------------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| EDW 2000 | For profiled roofing material up to 120mm | 1 | 119 | 119 | 125 | 133 | 142 | 149 | 153 | 147 | 157 | 157 | 169 |
| EDL 2000 | For slate up to 8mm thick                 | 1 | 119 | 119 | 125 | 133 | 142 | 149 | 153 | 147 | 157 | 157 | 169 |

| External frame sizes (w×h) cm | UNITS | FK34  | MK34  | PK34  | SK34   | UK34   |
|-------------------------------|-------|-------|-------|-------|--------|--------|
|                               |       | 66×92 | 78×92 | 94×92 | 114×92 | 134×92 |

### Lower fixed element example

|          |  |   |     |     |     |     |     |
|----------|--|---|-----|-----|-----|-----|-----|
| GIU 0070 |  | 1 | 593 | 749 | 780 | 861 | 899 |
|----------|--|---|-----|-----|-----|-----|-----|

### Flashing for lower fixed element

|                |                                           | WK34 |  |  |  |  |  |    |  |  |  |  |  |
|----------------|-------------------------------------------|------|--|--|--|--|--|----|--|--|--|--|--|
| ETW WK34 2000* | For profiled roofing material up to 120mm | 1    |  |  |  |  |  | 79 |  |  |  |  |  |
| ETL WK34 2000* | For slate up to 8mm thick                 | 1    |  |  |  |  |  | 79 |  |  |  |  |  |

### Total price example

|                                                               |   |       |       |       |       |       |       |       |       |       |       |       |
|---------------------------------------------------------------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Roof window (GGU 0070+GIU 0070), flashing (EDW 2000+ETW 2000) | 4 | 1,295 | 1,418 | 1,486 | 1,550 | 1,590 | 1,696 | 1,738 | 1,794 | 1,846 | 1,814 | 1,972 |
|---------------------------------------------------------------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|

### Recommended blinds and shutters for lower element

|          |                                   |   |     |     |     |     |     |     |     |     |     |     |     |
|----------|-----------------------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| MSI 5060 | Solar Anti-heat blinds (exterior) | 1 | 546 | 570 | 584 | 600 | 650 | 666 | 684 | 712 | 738 | 736 | 794 |
|----------|-----------------------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|

\* Pro+ flashing set includes Insulation collar (BDX) and Underfelt collar (BFX). All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://www.velux.co.uk)





# Sloping and vertical

Vertical façade extension for increased view: VIU, VFE, VFA & VFB

Extend your view with a fixed or openable, vertical roof window element. The additional window element fills the vertical space between the floor and the bottom of the roof window to provide a more expansive view and more natural daylight.

This is the ideal choice if you have a one and a half-storey home and want to maximise your roof window area.


- Extra façade view and daylight.
- Fixed or opening roof window elements.

| External frame sizes (w×h) cm |                             | U <sub>w</sub> -VALUE<br>W/m² K | MK35<br>78×95 | PK35<br>94×95 | SK35<br>114×95 | UK35<br>134×95 |
|-------------------------------|-----------------------------|---------------------------------|---------------|---------------|----------------|----------------|
|                               |                             |                                 |               |               |                |                |
| White maintenance-free        |                             |                                 |               |               |                |                |
| VIU 0070                      | Fixed                       | 1.3                             | 645           | 757           | 868            | 912            |
| VIU 0068                      | Fixed                       | 1.1                             | 774           | 908           | 1,042          | 1,094          |
| VIU 0066                      | Fixed                       | 1.0                             | 967           | 1,135         | 1,302          | 1,367          |
| White painted                 |                             |                                 |               |               |                |                |
| VFE 2070                      | Bottom-hung opening inwards | 1.3                             | 734           | 833           | 956            | 1,004          |
| VFE 2068                      | Bottom-hung opening inwards | 1.1                             | 852           | 1,000         | 1,147          | 1,205          |
| VFE 2066                      | Bottom-hung opening inwards | 1.0                             | 1,065         | 1,250         | 1,434          | 1,506          |
| VFA/B 2070                    | Bottom-hung opening inwards | 1.3                             | 906           | 1,008         | -              | -              |
| VFA/B 2066                    | Bottom-hung opening inwards | 1.0                             | 1,059         | 1,242         | -              | -              |

Find EPDs at [velux.co.uk/technical-library](https://www.velux.co.uk/technical-library)

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://www.velux.co.uk)

## Roof pitch



## Interior finish options

| Recommended |                                                                                                                         |
|-------------|-------------------------------------------------------------------------------------------------------------------------|
|             | <b>White maintenance-free</b><br>The most durable and robust finish that is completely maintenance-free                 |
|             | <b>White painted</b><br>High quality natural pine treated with a water-based white paint for a discreet wood grain look |

## Glazing options

|                                                          | Double glazing<br>--70 | Triple glazing<br>--68 | Triple glazing<br>--66 |
|----------------------------------------------------------|------------------------|------------------------|------------------------|
| Rain noise reduction                                     | ✓                      | ✓                      | ✓                      |
| Safety lamination                                        | ✓                      | ✓                      | ✓                      |
| Toughened glass                                          | ✓                      | ✓                      | ✓                      |
| UV filter                                                | ✓                      | ✓                      | ✓                      |
| Easy-to-clean                                            |                        |                        | ✓                      |
| Anti-dew                                                 |                        |                        | ✓                      |
| Thermal transmittance of glazing (U <sub>g</sub> -value) | 1.0                    | 0.7                    | 0.6                    |

Read more about glazing specifications on page 162.

## Blinds and shutters

- Consider interior blinds for light control, and exterior Anti-heat blinds or shutters for added heat protection.

Read more on page 89.





## Details

Fixed facade extension VIU

Inwards tilting, bottom-hung facade extension VFE

Inwards opening, side-hung facade extension (left hung side seen from inside) VFA

Inwards opening, side-hung facade extension (right hung side seen from inside) VFB



## Popular combinations

|                               | UNITS | MK04<br>78×98 | MK06<br>78×118 | MK08<br>78×140 | PK06<br>94×118 | PK10<br>94×160 | SK06<br>114×118 | SK08<br>114×140 | UK08<br>134×140 |
|-------------------------------|-------|---------------|----------------|----------------|----------------|----------------|-----------------|-----------------|-----------------|
| External frame sizes (w×h) cm |       |               |                |                |                |                |                 |                 |                 |
|                               |       |               |                |                |                |                |                 |                 |                 |

## Upper element, roof window example

|          |   |     |     |     |     |     |     |     |     |
|----------|---|-----|-----|-----|-----|-----|-----|-----|-----|
| GGU 0070 | 1 | 471 | 533 | 589 | 589 | 726 | 707 | 749 | 825 |
|----------|---|-----|-----|-----|-----|-----|-----|-----|-----|

## Pro+ flashings set including collar (BDX) and underfelt collar (BFX)

|          |                                           |   |     |     |     |     |     |     |     |     |
|----------|-------------------------------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|
| EFL 2012 | For profiled roofing material up to 120mm | 1 | 208 | 219 | 233 | 248 | 269 | 258 | 275 | 296 |
| EFL 2012 | For slate up to 8mm thick                 | 1 | 208 | 219 | 233 | 248 | 269 | 258 | 275 | 296 |

| External frame sizes (w×h) cm |  | UNITS | MK35<br>78×95 | PK35<br>94×95 | SK35<br>114×95 | UK35<br>134×95 |
|-------------------------------|--|-------|---------------|---------------|----------------|----------------|
|-------------------------------|--|-------|---------------|---------------|----------------|----------------|

## Vertical extension, roof window example

|          |       |   |     |     |     |     |
|----------|-------|---|-----|-----|-----|-----|
| VIU 0070 | Fixed | 1 | 645 | 757 | 868 | 912 |
|----------|-------|---|-----|-----|-----|-----|

## Total price example


|                                                        |   |       |       |       |       |       |       |       |       |
|--------------------------------------------------------|---|-------|-------|-------|-------|-------|-------|-------|-------|
| Roof Window (GGU 0070 + VIU 0070), flashing (EFL 2012) | 3 | 1,324 | 1,397 | 1,467 | 1,594 | 1,752 | 1,833 | 1,892 | 2,033 |
|--------------------------------------------------------|---|-------|-------|-------|-------|-------|-------|-------|-------|

All prices in GBP (£)  
Find all flashing types, sizes and prices at [velux.co.uk](https://www.velux.co.uk)





Roof pitch



Interior finish options

**White painted**

High quality natural pine treated with a water-based white paint for a discreet wood grain look

| Glazing options                                          |  | Triple glazing<br>--66 |
|----------------------------------------------------------|--|------------------------|
| Rain noise reduction                                     |  | ✓                      |
| Safety lamination                                        |  | ✓                      |
| Toughened glass                                          |  | ✓                      |
| UV filter                                                |  | ✓                      |
| Easy-to-clean                                            |  | ✓                      |
| Anti-dew                                                 |  | ✓                      |
| Thermal transmittance of glazing (U <sub>g</sub> -value) |  | 0.6-0.7                |

Read more about glazing specifications on page 162.

Blinds and shutters

- Consider interior blinds for light control, and exterior Anti-heat blinds or shutters for added heat protection.

Read more on page 89.

Roof balcony

From roof window to a balcony experience: GDL

Transform your home and welcome the outdoors in by simply opening your VELUX Roof balcony. The innovative balcony opens in seconds to give your home more space, daylight and fresh air. Consisting of a top-hung roof window and a bottom section that unfolds into a glazed balcony with elegant side banister railings, it's a balcony experience like no other.

- Enjoy extra space in the room.
- Top element opens 45° outwards giving you extra headroom and beautiful panoramic views.
- Transforms from a roof window into a balcony in seconds.
- Side banister railings for extra safety.
- Energy-efficient triple glazing is featured as standard.
- Double package consists of one roof balcony and one top-hung upper and fixed lower element.

Find EPDs at [velux.co.uk/technical-library](https://www.velux.co.uk/technical-library)



| External frame sizes (w x h) cm | U <sub>w</sub> -VALUE | MK19   | MK19    | PK19   | PK19    | SK19    | SK19    |
|---------------------------------|-----------------------|--------|---------|--------|---------|---------|---------|
|                                 | W/m² K                | 78×252 | 166×252 | 94×252 | 198×252 | 114×252 | 238×252 |
|                                 |                       |        |         |        |         |         |         |

| White painted |              |                                                                                                  |       |       |       |       |       |       |       |
|---------------|--------------|--------------------------------------------------------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
| Manual        | GDL S10L02*  | Including flashings for slate up to 8mm thick                                                    | 1.1** | 3,106 | -     | 3,339 | -     | 3,563 | -     |
|               | GDL S10W02*  | Including flashings for profiled roofing material up to 120mm in profile                         | 1.1** | 3,106 | -     | 3,339 | -     | 3,563 | -     |
|               | GDL SK0L223* | Including 1 x GPL and 1 x GIL and flashings for slate up to 8mm thick                            | 1.1** | -     | 6,120 | -     | 6,460 | -     | 6,962 |
|               | GDL SK0W225* | Including 1 x GPL and 1 x GIL and flashings for profiled roofing material up to 120mm in profile | 1.1** | -     | 6,120 | -     | 6,460 | -     | 6,962 |

\* Includes installation products (BDX 2000).

\*\* U<sub>w</sub> for GDL in size PK19 and SK19 = 1.1 and for size MK19 = 1.3. GPL and GIL U<sub>w</sub> = 1.0.

All prices in GBP (£)

Find all sizes and prices at [velux.co.uk](https://www.velux.co.uk)





## 3in1 solar centre-pivot

Three roof windows in one frame: GGLS

The 3in1 solar roof window gives full flexibility for ultimate control and convenience. Control the two openable sashes, each blind and heat protection product manually, remotely or with a VELUX Intelligent home control system.

- Solar powered with no additional wiring needed for installation.
- Basic wall switch included, see page 24.
- Integrated rain sensor for automatic closing.
- Provides the feeling of more space.
- One frame with multiple sashes for easy installation.
- Two openable and one fixed sash.


| External frame sizes (w×h) cm | U <sub>w</sub> -VALUE |  | FFKF06  |  | FFKF08  |  |
|-------------------------------|-----------------------|--|---------|--|---------|--|
|                               | W/m² K                |  | 188×118 |  | 188×140 |  |
|                               |                       |  |         |  |         |  |

| White painted |             |                           |         |       |       |
|---------------|-------------|---------------------------|---------|-------|-------|
|               | GGLS 207030 | 3in1 solar. Double glazed | 1.3-1.4 | 2,227 | 2,361 |
|               | GGLS 206630 | 3in1 solar. Triple glazed | 1.0-1.1 | 2,956 | 3,158 |

| Flashing  |                                           |  |  |     |     |
|-----------|-------------------------------------------|--|--|-----|-----|
| EDWS 2000 | For profiled roofing material up to 120mm |  |  | 388 | 408 |
| EDLS 2000 | For slate up to 8mm thick                 |  |  | 388 | 408 |

Standard flashing includes Insulation collar (BDX) and Underfelt collar (BFX).  
\* Fixed element - internal view.  
\*\* Necessary to add 1x ZOZ 246 solar switch on each roof window with motor.

### Roof pitch



### Interior finish options

**White painted**  
High quality natural pine treated with a water-based white paint for a discreet wood grain look

| Glazing options |                      | Double glazing | Triple glazing |
|-----------------|----------------------|----------------|----------------|
|                 |                      | --70           | --66           |
|                 | Rain noise reduction | ✓              | ✓              |
|                 | Safety lamination    | ✓              | ✓              |
|                 | Toughened glass      | ✓              | ✓              |
|                 | UV filter            | ✓              | ✓              |
|                 | Easy-to-clean        |                | ✓              |
|                 | Anti-dew             |                | ✓              |

Thermal transmittance of glazing (U<sub>g</sub>-value)

|  |     |     |
|--|-----|-----|
|  | 1.0 | 0.6 |
|--|-----|-----|

Read more about glazing specifications on page 162.

### Blinds and shutters

- Consider interior blinds for light control, and exterior Anti-heat blinds or shutters for added heat protection.

Read more on page 89.

### Remotes and Apps

- Easily control your VELUX solar products with our remote controls or apps.
- Free App Control included. Read more at [velux.co.uk/freeapp](http://velux.co.uk/freeapp)

| U <sub>w</sub> -VALUE | FFKF06  |  | FFKF08  |  |
|-----------------------|---------|--|---------|--|
|                       | 188×118 |  | 188×140 |  |
|                       |         |  |         |  |

| White painted |           |                                         |         |       |       |
|---------------|-----------|-----------------------------------------|---------|-------|-------|
|               | GGLS 2070 | 3in1 manual centre-pivot. Double glazed | 1.3-1.4 | 1,461 | 1,608 |
|               | GGLS 2066 | 3in1 manual centre-pivot. Triple glazed | 1.0-1.1 | 2,188 | 2,390 |

| Flashing  |                                           |  |  |     |     |
|-----------|-------------------------------------------|--|--|-----|-----|
| EDWS 2000 | For profiled roofing material up to 120mm |  |  | 388 | 408 |
| EDLS 2000 | For slate up to 8mm thick                 |  |  | 388 | 408 |

Standard flashing includes Insulation collar (BDX) and Underfelt collar (BFX).  
\* Fixed element - internal view.  
\*\* Necessary to add 1x ZOZ 246 solar switch on each roof window with motor.

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](http://velux.co.uk)  
Find EPDs at [velux.co.uk/technical-library](http://velux.co.uk/technical-library)



## 3in1 manual centre-pivot

Three roof windows in one frame: GGLS

With the 3in1 centre-pivot roof window, you can create a stunning focal point in any room. Its slim-frame profile maximises the amount of daylight entering the room. What's more, the single frame makes installation of the three roof windows as simple as fitting just one VELUX roof window.

- Provides the feeling of more space.
- One frame with multiple sashes for easy installation.
- Compatible with VELUX Anti-heat blinds and shutters.
- Two openable and one fixed sash.


| External frame sizes (w×h) cm | U <sub>w</sub> -VALUE |  | FFKF06  |  | FFKF08  |  |
|-------------------------------|-----------------------|--|---------|--|---------|--|
|                               | W/m² K                |  | 188×118 |  | 188×140 |  |
|                               |                       |  |         |  |         |  |

| White painted |           |                                         |         |       |       |
|---------------|-----------|-----------------------------------------|---------|-------|-------|
|               | GGLS 2070 | 3in1 manual centre-pivot. Double glazed | 1.3-1.4 | 1,461 | 1,608 |
|               | GGLS 2066 | 3in1 manual centre-pivot. Triple glazed | 1.0-1.1 | 2,188 | 2,390 |

| Flashing  |                                           |  |  |     |     |
|-----------|-------------------------------------------|--|--|-----|-----|
| EDWS 2000 | For profiled roofing material up to 120mm |  |  | 388 | 408 |
| EDLS 2000 | For slate up to 8mm thick                 |  |  | 388 | 408 |

Standard flashing includes Insulation collar (BDX) and Underfelt collar (BFX).  
\* Fixed element - internal view.

### Roof pitch



### Interior finish options

**White painted**  
High quality natural pine treated with a water-based white paint for a discreet wood grain look

| Glazing options |                      | Double glazing | Triple glazing |
|-----------------|----------------------|----------------|----------------|
|                 |                      | --70           | --66           |
|                 | Rain noise reduction | ✓              | ✓              |
|                 | Safety lamination    | ✓              | ✓              |
|                 | Toughened glass      | ✓              | ✓              |
|                 | UV filter            | ✓              | ✓              |
|                 | Easy-to-clean        |                | ✓              |
|                 | Anti-dew             |                | ✓              |

Thermal transmittance of glazing (U<sub>g</sub>-value)

|  |     |     |
|--|-----|-----|
|  | 1.0 | 0.6 |
|--|-----|-----|

Read more about glazing specifications on page 162.

### Blinds and shutters

- Consider interior blinds for light control, and exterior Anti-heat blinds or shutters for added heat protection.

Read more on page 89.

### Out-of-reach

- Consider a 3in1 solar roof window for remote-controlled operation of your roof windows if placed out-of-reach.

Read more on page 28.

| U <sub>w</sub> -VALUE | FFKF06  |  | FFKF08  |  |
|-----------------------|---------|--|---------|--|
|                       | 188×118 |  | 188×140 |  |
|                       |         |  |         |  |

| White painted |           |                                         |         |       |       |
|---------------|-----------|-----------------------------------------|---------|-------|-------|
|               | GGLS 2070 | 3in1 manual centre-pivot. Double glazed | 1.3-1.4 | 1,461 | 1,608 |
|               | GGLS 2066 | 3in1 manual centre-pivot. Triple glazed | 1.0-1.1 | 2,188 | 2,390 |

| Flashing  |                                           |  |  |     |     |
|-----------|-------------------------------------------|--|--|-----|-----|
| EDWS 2000 | For profiled roofing material up to 120mm |  |  | 388 | 408 |
| EDLS 2000 | For slate up to 8mm thick                 |  |  | 388 | 408 |

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](http://velux.co.uk)  
Find EPDs at [velux.co.uk/technical-library](http://velux.co.uk/technical-library)





# 3in1 manual top-hung


Three roof windows in one frame: GPLS

Enjoy the best view with the 3in1 top-hung roof window. The elegant handle at the bottom of the roof window allows it to be opened up to 45° for an extra spacious balcony feeling.

- Opens the room for an uninterrupted view.
- One frame with multiple sashes for easy installation.
- Compatible with VELUX Anti-heat blinds and shutters.
- Two openable and one fixed sash.

Find EPDs at [velux.co.uk/technical-library](https://www.velux.co.uk/technical-library)

## Roof pitch



## Interior finish options



**White painted**  
High quality natural pine treated with a water-based white paint for a discreet wood grain look

## Glazing options

|                                                          | Double glazing<br>--70 | Triple glazing<br>--66 |
|----------------------------------------------------------|------------------------|------------------------|
| Rain noise reduction                                     | ✓                      | ✓                      |
| Safety lamination                                        | ✓                      | ✓                      |
| Toughened glass                                          | ✓                      | ✓                      |
| UV filter                                                | ✓                      | ✓                      |
| Easy-to-clean                                            |                        | ✓                      |
| Anti-dew                                                 |                        | ✓                      |
| Thermal transmittance of glazing (U <sub>g</sub> -value) | 1.0                    | 0.6                    |

Read more about glazing specifications on page 162.

## Blinds and shutters

- Consider interior blinds for light control, and exterior Anti-heat blinds or shutters for added heat protection.

Read more on page 89.



Roof windows

| External frame sizes (w×h) cm                                                                |                                           |                              | U <sub>w</sub> -VALUE<br>W/m² K | FFKF06<br>188×118                                                                     | FFKF08<br>188×140                                                                     |
|----------------------------------------------------------------------------------------------|-------------------------------------------|------------------------------|---------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                                                                                              |                                           |                              |                                 |  |  |
| White painted                                                                                |                                           |                              |                                 |                                                                                       |                                                                                       |
|  Manual | GPLS 2070                                 | 3in1 top-hung. Double glazed | 1.3-1.4                         | 1,849                                                                                 | 1,983                                                                                 |
|                                                                                              | GPLS 2066                                 | 3in1 top-hung. Triple glazed | 1.0-1.1                         | 2,578                                                                                 | 2,780                                                                                 |
| Flashing                                                                                     |                                           |                              |                                 |                                                                                       |                                                                                       |
| EDWS 2000                                                                                    | For profiled roofing material up to 120mm |                              |                                 | 388                                                                                   | 408                                                                                   |
| EDLS 2000                                                                                    | For slate up to 8mm thick                 |                              |                                 | 388                                                                                   | 408                                                                                   |

Standard flashing includes Insulation collar (BDX) and Underfelt collar (BFX).  
\* Fixed element - internal view.

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://www.velux.co.uk)





6 roof window system



4 roof window system


# Dormer

More space and up to 2.5 times more daylight

The unique design of the VELUX Dormer roof window system allows more natural daylight to enter the room compared to a traditional dormer. It increases usable space, creates a light and airy atmosphere and fills the room with up to 2.5 times more daylight than a traditional dormer.

- Creates more headroom, increases daylight and improves ventilation, contributing to a healthier indoor environment.
- Enhances overall thermal performance.
- Can often be installed in just one day, often without planning permission.
- Less external maintenance and movement compared to traditional dormer solutions.
- Can be combined with solar, electric or manual roof windows.

## Roof pitch



## Interior finish options

|  |                                                                                                                               |
|--|-------------------------------------------------------------------------------------------------------------------------------|
|  | <b>Recommended</b><br><b>White maintenance-free</b><br>The most durable and robust finish that is completely maintenance-free |
|  | <b>White painted</b><br>High quality natural pine treated with a water-based white paint for a discreet wood grain look       |

## Glazing options

|                                                          |                        |
|----------------------------------------------------------|------------------------|
|                                                          | Double glazing<br>--70 |
| Rain noise reduction                                     | ✓                      |
| Safety lamination                                        | ✓                      |
| Toughened glass                                          | ✓                      |
| UV filter                                                | ✓                      |
| Easy-to-clean                                            |                        |
| Anti-dew                                                 |                        |
| Thermal transmittance of glazing (U <sub>g</sub> -value) | 1.0                    |
| Read more about glazing specifications on page 162.      |                        |

## Blinds and shutters

- Consider interior blinds for light control, and exterior Anti-heat blinds or shutters for added heat protection.

Read more on page 89.

## Remotes and Apps

- Easily control your VELUX solar and electric products with our remote controls or apps.
- Free App Control included. Read more at [velux.co.uk/freeapp](https://velux.co.uk/freeapp)



| External frame sizes (w×h) cm | MK06<br>168×267 | PK06<br>200×267 | SK06<br>240×267 | MK06<br>248×267 |
|-------------------------------|-----------------|-----------------|-----------------|-----------------|
|                               |                 |                 |                 |                 |

| Package including roof windows*               |                                                                   |       |       |       |       |
|-----------------------------------------------|-------------------------------------------------------------------|-------|-------|-------|-------|
| GGL SB0W22101                                 | Dormer 4 roof window system including 4x GGL 2070 roof windows    | 5,123 | 5,377 | 5,942 | -     |
| GGL SB0W32101                                 | Dormer 6 roof window system including 6x GGL 2070 roof windows    | -     | -     | -     | 6,395 |
| GGU SB0W22101                                 | Dormer 4 roof window system including 2x GPU 0070 and 2x GGU 0070 | 5,753 | 6,027 | 6,644 | -     |
| GGU SB0W32101                                 | Dormer 6 roof window system including 3x GPU 0070 and 3x GGU 0070 | -     | -     | -     | 7,340 |
| Flashing + base unit (excluding roof windows) |                                                                   |       |       |       |       |
| EBW 2022BK                                    | Dormer 4 roof window system (flashing + base unit)                | 3,231 | 3,281 | 3,426 | -     |
| EBW 2032BK                                    | Dormer 6 roof window system (flashing + base unit)                | -     | -     | -     | 3,557 |

| Recommended blinds and shutters |                                  |     |     |     |     |
|---------------------------------|----------------------------------|-----|-----|-----|-----|
| MSL 5060                        | Solar Anti-heat blind (exterior) | 302 | 328 | 350 | 302 |

\* All packages are also available with other glazing. Flashings for dormers include BFX/BDX. Price per unit.

All prices in GBP (£)  
Find all flashing types, sizes and prices at [velux.co.uk](https://velux.co.uk)





Triple



Single



Double


# Mini dormer

Extra space in a compact solution

The clever Mini dormer design places VELUX roof windows at a steeper angle in the roof compared to the roof pitch. This allows much more daylight to enter than with a traditional vertical dormer window. The Mini dormer comes in various options for 1, 2 or 3 roof windows side-by-side and can be installed quickly and easily from the inside.

- The compact solution is designed to increase space and headroom, enhance daylight and improve ventilation.
- More daylight compared to a conventional dormer with the same glazing area.
- Can often be installed in just one day, often without planning permission.
- Less external maintenance and movement compared to traditional dormer solutions.
- Combine with solar, electric or manual roof windows.

## Roof pitch



## Interior finish options

|  |                                                                                                                               |
|--|-------------------------------------------------------------------------------------------------------------------------------|
|  | <b>Recommended</b><br><b>White maintenance-free</b><br>The most durable and robust finish that is completely maintenance-free |
|  | <b>White painted</b><br>High quality natural pine treated with a water-based white paint for a discreet wood grain look       |

## Glazing options

|                                                          |                        |
|----------------------------------------------------------|------------------------|
|                                                          | Double glazing<br>--70 |
| Rain noise reduction                                     | ✓                      |
| Safety lamination                                        | ✓                      |
| Toughened glass                                          | ✓                      |
| UV filter                                                | ✓                      |
| Easy-to-clean                                            |                        |
| Anti-dew                                                 |                        |
| Thermal transmittance of glazing (U <sub>g</sub> -value) | 1.0                    |
| Read more about glazing specifications on page 162.      |                        |

## Blinds and shutters

- Consider interior blinds for light control, and exterior Anti-heat blinds or shutters for added heat protection.

Read more on page 89.

## Remotes and Apps

- Easily control your VELUX solar and electric products with our remote controls or apps.
- Free App Control included. Read more at [velux.co.uk/freeapp](https://velux.co.uk/freeapp)



| External frame sizes (w×h) cm | MK04  | MK06   | MK08   | MK10   | PK06   | PK08   | PK10   | SK06    | SK08    | UK04   | UK08    |
|-------------------------------|-------|--------|--------|--------|--------|--------|--------|---------|---------|--------|---------|
|                               | 78×98 | 78×118 | 78×140 | 78×160 | 94×118 | 94×140 | 94×160 | 114×118 | 114×140 | 134×98 | 134×140 |
|                               |       |        |        |        |        |        |        |         |         |        |         |

### Package including roof windows\*

|               |                                                                                      |       |       |       |       |       |       |       |       |       |       |       |
|---------------|--------------------------------------------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| GGL SA0W11101 | Mini dormer roof window basic single including 1x GGL 2070 centre-pivot roof window  | 1,374 | 1,504 | 1,660 | -     | 1,660 | 1,834 | 1,906 | 1,813 | 1,927 | 1,864 | 2,118 |
| GGL SA0W21101 | Mini dormer roof window basic duo including 2x GGL 2070 centre-pivot roof windows    | 2,968 | 3,246 | 3,582 | 3,857 | 3,582 | 3,950 | 4,101 | 3,899 | 4,143 | 4,017 | 4,554 |
| GGL SA0W31101 | Mini dormer roof window basic triple including 3x GGL 2070 centre-pivot roof windows | 4,628 | 5,060 | 5,584 | 6,004 | -     | -     | -     | -     | -     | -     | -     |
| GPU SA0W11101 | Mini dormer roof window basic single including 1x GPU 0070 top-hung roof window      | 1,621 | 1,759 | -     | -     | 1,920 | 2,105 | 2,182 | 2,086 | 2,205 | -     | 2,405 |
| GPU SA0W21101 | Mini dormer roof window basic duo including 2x GPU 0070 top-hung roof windows        | 3,462 | 3,756 | 4,102 | 4,397 | 4,102 | -     | -     | 4,445 | 4,699 | -     | 5,128 |
| GPU SA0W31101 | Mini dormer roof window basic triple including 3x GPU 0070 top-hung roof windows     | -     | 5,825 | 6,364 | 6,814 | -     | -     | -     | -     | -     | -     | -     |

### Flashing + base unit (excluding roof windows)

|           |                                                             |       |       |       |       |       |       |       |       |       |       |       |
|-----------|-------------------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| EAW 6000  | Mini dormer roof window basic single (flashing + base unit) | 955   | 1,031 | 1,136 | 1,184 | 1,136 | 1,222 | 1,261 | 1,184 | 1,261 | 1,261 | 1,385 |
| EAW 6021E | Mini dormer roof window basic duo (flashing + base unit)    | 2,130 | 2,300 | 2,534 | 2,641 | 2,534 | 2,726 | 2,811 | 2,641 | 2,811 | 2,811 | 3,088 |
| EAW 6031E | Mini dormer roof window basic triple (flashing + base unit) | 3,371 | 3,641 | 4,012 | 4,180 | -     | -     | -     | -     | -     | -     | -     |

### Recommended blinds and shutters

|          |                                  |     |     |     |     |     |     |     |     |     |     |     |
|----------|----------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| MSL 5060 | Solar Anti-heat blind (exterior) | 288 | 302 | 318 | 334 | 328 | 344 | 362 | 350 | 376 | 348 | 406 |
|----------|----------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|

\* All packages are also available with other glazing.  
Price per unit.

All prices in GBP (£)  
Find all flashing types, sizes and prices at [velux.co.uk](https://velux.co.uk)





## Cold room


Cold room windows: GVK, GVT

The VELUX Cold room roof window is designed for use in uninhabited rooms where easy access to the roof and regular ventilation is needed. Side-hung, it opens to the left or right depending on your preference. The roof window is made from maintenance-free aluminium and polyurethane and comes with integrated flashing.

- Three ventilation positions for constant low-level air flow.
- Patented opening restrictor securely holds the roof window open at 90°.
- Safe roof access using the moulded tread with grooves (GVT).
- Extruded aluminium sash for a maintenance-free roof window.

| External frame sizes (w×h) cm |           | 103                      |                          |
|-------------------------------|-----------|--------------------------|--------------------------|
|                               |           | 46×61                    | 54×83                    |
|                               |           | <input type="checkbox"/> | <input type="checkbox"/> |
| Black polyurethane            |           |                          |                          |
| GVK 0000Z                     | Side-hung | 200                      | -                        |
| GVT 0059Z                     | Side-hung | -                        | 272                      |

### Roof pitch



### Glazing options

|                      | --00 | --59 |
|----------------------|------|------|
| Rain noise reduction |      |      |
| Safety lamination    |      |      |
| Toughened glass      |      | ✓    |
| UV filter            |      |      |
| Easy-to-clean        |      |      |
| Anti-dew             |      |      |



## Smoke ventilation roof window


Electric smoke ventilation roof windows: GGU

The VELUX Smoke ventilation roof window is designed to quickly release smoke and excess heat. The ventilation control system can enable several functions including automatic opening. It can also be opened to let in fresh air for improved indoor comfort. The Smoke ventilation roof window is extensively tested and compliant with all EU requirements.

- Available for 1m<sup>2</sup> (SK06 size) or 1.5m<sup>2</sup> (UK08 size) of smoke-free ventilation area.
- Opens to full fire position in just 60 seconds when smoke ventilation is activated.
- Same exterior design as other VELUX sloped roof windows.
- Tested according to DIN EN 12101-2.
- Compatible with wind deflector KFD to optimise the aerodynamic ventilation areas.

| External frame sizes (w×h) cm                                                                             |            |                                                                                                                                                         | U <sub>w</sub> -VALUE<br>W/m² K | SK06<br>114×118 | UK08<br>134×140 |
|-----------------------------------------------------------------------------------------------------------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|-----------------|-----------------|
|                                                                                                           |            |                                                                                                                                                         |                                 | <div></div>     | <div></div>     |
| White maintenance-free                                                                                    |            |                                                                                                                                                         |                                 |                 |                 |
| <div> Electric</div> | GGU S40L02 | GGU 0070 electric window + flashings for slate up to 8mm thick.<br>Supplied with 1x smoke sensor, 2x break glass points and 1x wall control unit        | 1.3                             | 2,137           | 2,277           |
|                                                                                                           | GGU S40W02 | GGU 0070 electric window + flashings for tiles up to 120mm in profile.<br>Supplied with 1x smoke sensor, 2x break glass points and 1x wall control unit | 1.0                             | 2,137           | 2,277           |

### Roof pitch



For geometric smoke ventilation, the system is certified to EN ISO12101-2 for roof pitches between 15-90°. For aerodynamic smoke ventilation, the system is certified to EN ISO12101-2 for roof pitches between 15-60°.

### Interior finish options


| Recommended                                                                                             |
|---------------------------------------------------------------------------------------------------------|
| <b>White maintenance-free</b><br>The most durable and robust finish that is completely maintenance-free |

### Glazing options

|                                                          | Double glazing<br>--70 | Triple glazing<br>--66 |
|----------------------------------------------------------|------------------------|------------------------|
| Rain noise reduction                                     | ✓                      | ✓                      |
| Safety lamination                                        | ✓                      | ✓                      |
| Toughened glass                                          | ✓                      | ✓                      |
| UV filter                                                | ✓                      | ✓                      |
| Easy-to-clean                                            |                        | ✓                      |
| Anti-dew                                                 |                        | ✓                      |
| Thermal transmittance of glazing (U <sub>g</sub> -value) | 1.0                    | 0.6                    |

Read more about glazing specifications on page 162.



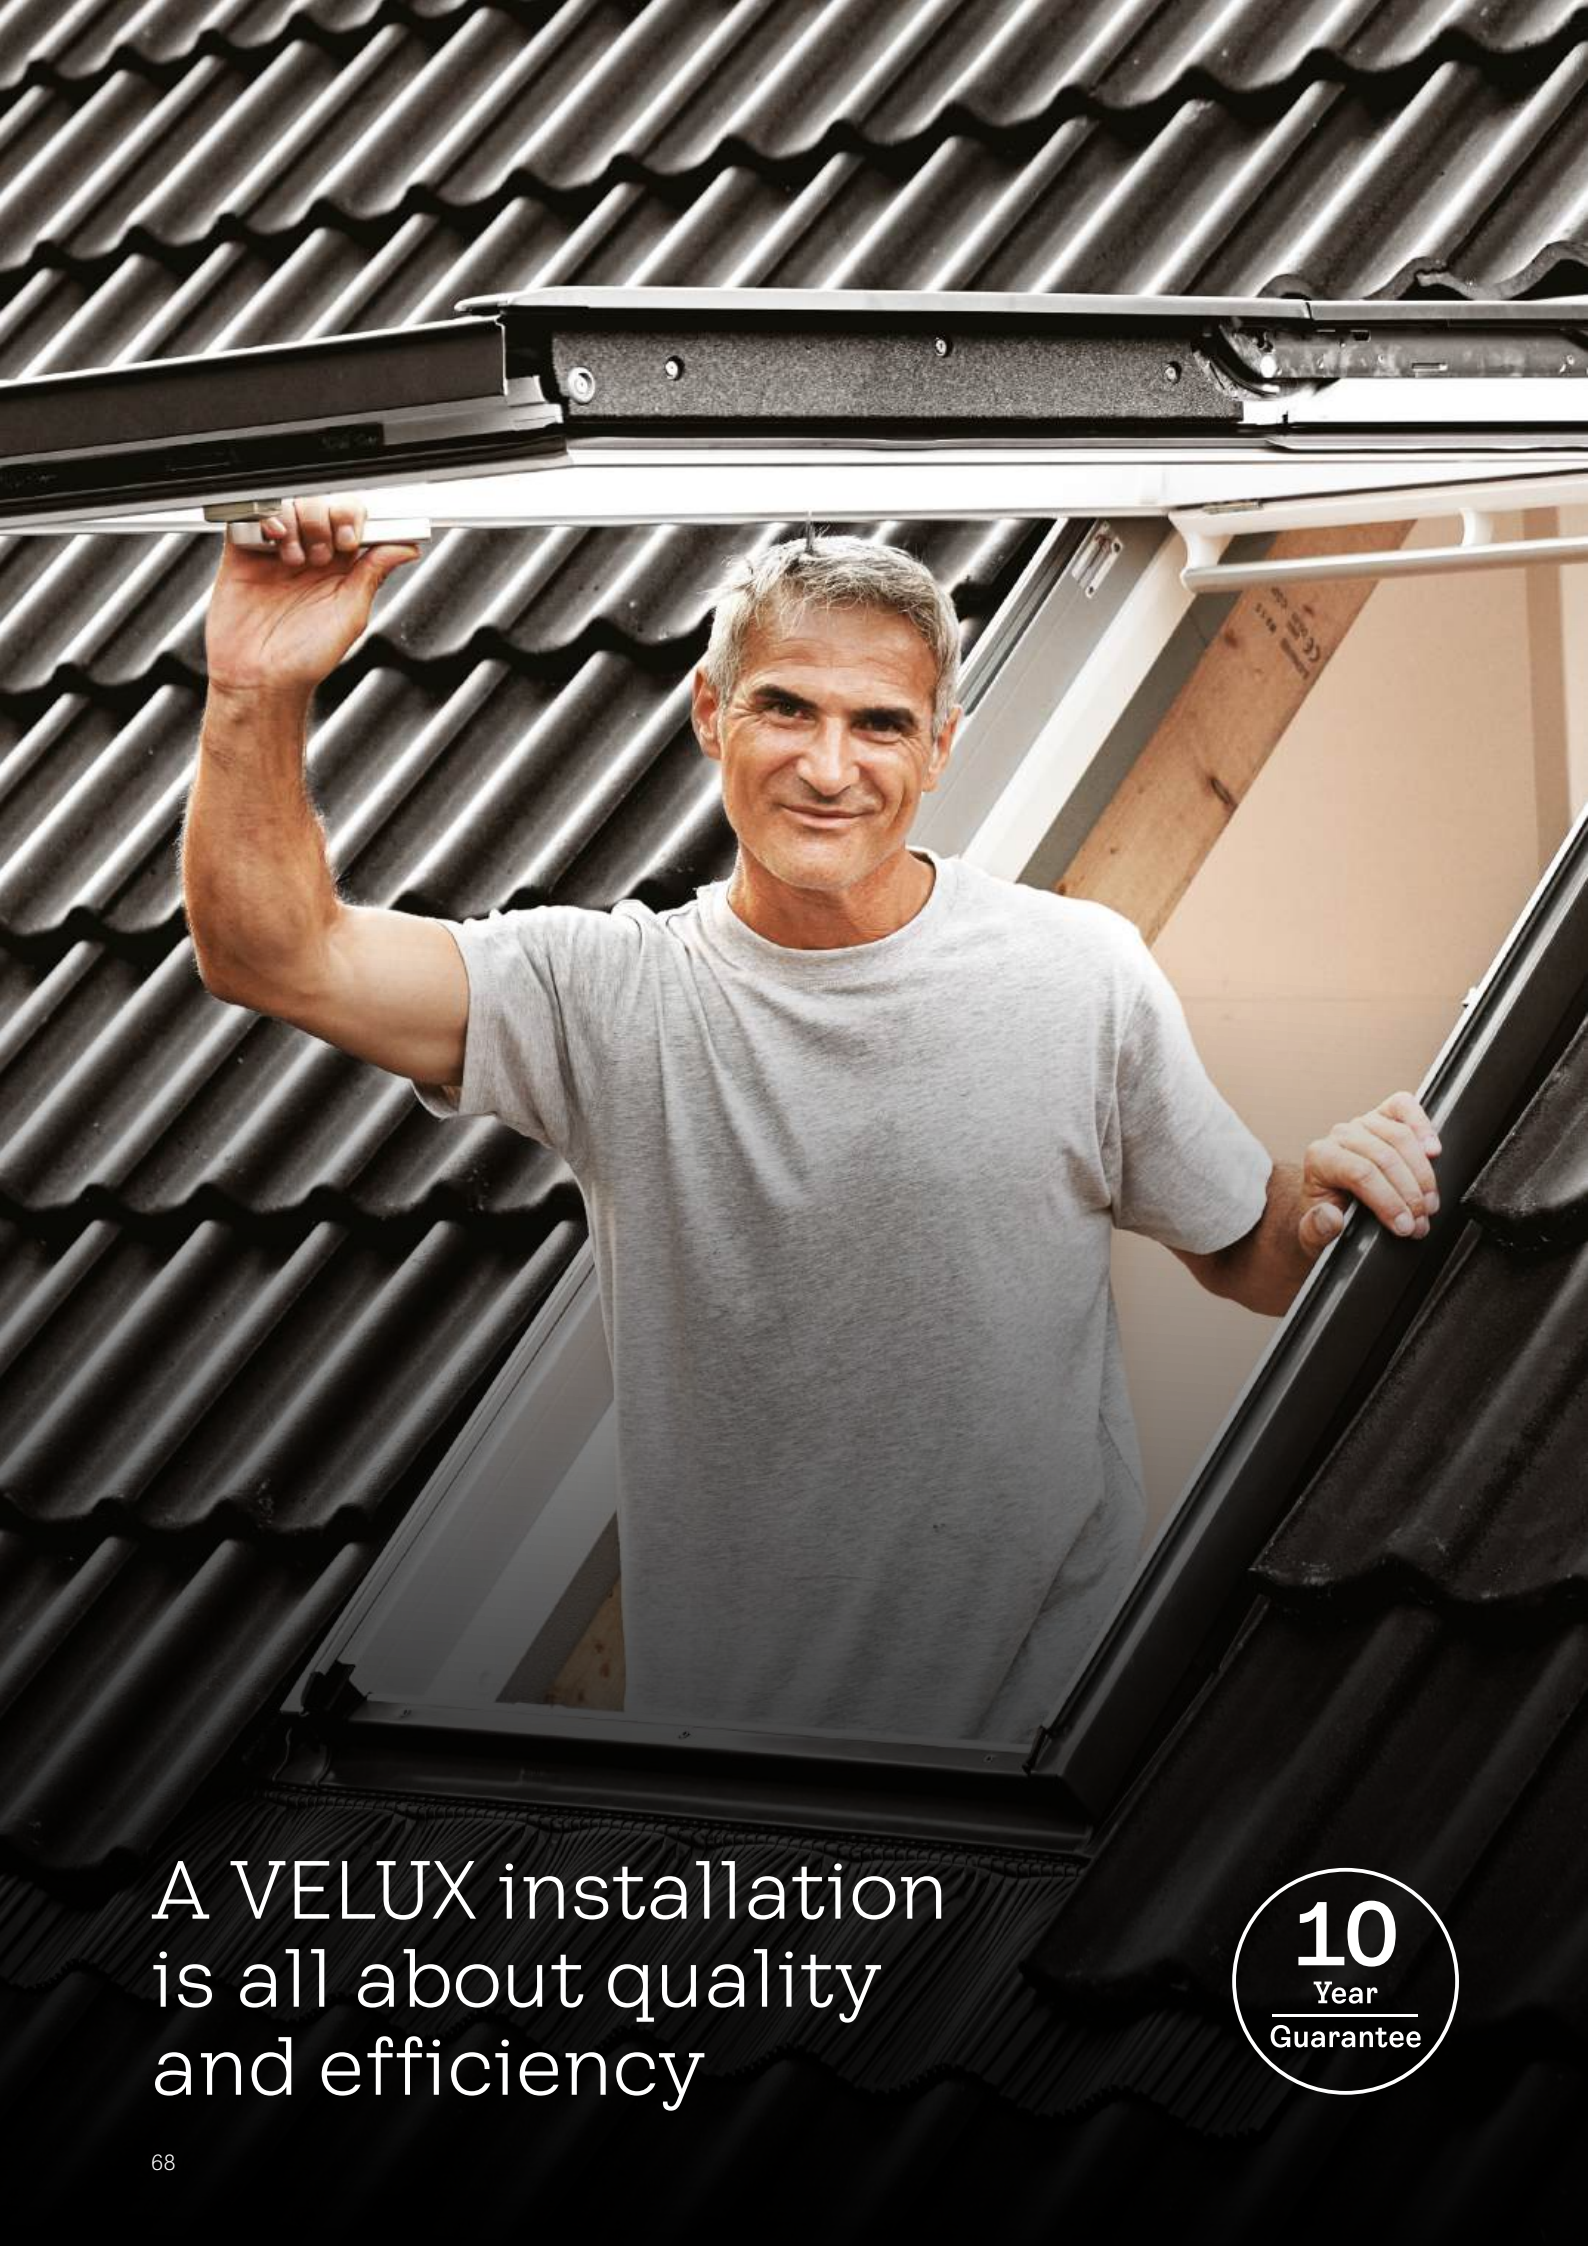

A VELUX installation  
is all about quality  
and efficiency



# Installation and flashings

---

## Flashing sets

Page 71

Flashings for standard installation  
Flashings for recessed installation  
Solar integrator  
Replacement  
Flashings for combinations and extensions

---

## Vapour barrier collar

Page 86

---

## Linings

Page 87



High-quality installation products included in the flashing set

Pro+ flashing set  
(2000 variant)



## Installation products

### Insulation collar BDX

- Insulates around the roof window frame, reducing heat loss and eliminating cold bridges.
- Flexible Insulation collar can be compressed for quick installation.
- The combination of rigid and flexible foam ensures a tight, energy-efficient installation to the roof construction.

### Underfelt collar BFX

- Ensures a perfect fit and watertight seal between the roof window, battens and the roofing underfelt.
- Easy to fit – simply place on top of the roof window and unfold.
- An adjustable and self-supporting drainage gutter is included in the BFX. This leads the water away from the head of the roof window if there is a leak above.



## Flashing sets

Our flashing sets contain everything you need for the best possible installation.

Our flashing sets have been carefully designed to make every step of the installation process as simple as possible. For example, the magnetic screws make mounting easier and the BFX Underfelt collar can simply be unfolded into place.

Even disposal is easy as the packaging no longer contains plastic. You can recycle it all as cardboard waste.

### Pro+ flashing set


An upgraded flashing set with added insulation for reduction of heat loss and cold bridges.

- Including Insulation collar BDX.
- Including Underfelt collar BFX and drainage gutter.





Roof pitch



Colour options



Dark grey  
(Standard)

Standard installation height

- Install the brackets at the top and the bottom of the roof window frame, at the red line level.



Standard flashings

The Pro+ (2000) flashing set comes with an Underfelt collar (BFX) for a watertight seal between the roof window, the roof and the Insulation collar (BDX) for heat loss reduction and elimination of cold bridges.

The Pro (1000) flashing set comes with Underfelt collar (BFX) for a watertight seal between the roof window and the roof.

Profiled roofing material EDW

- For profiled roofing material up to 120mm.
- Suitable for interlocking slate, thatch and profiled sheeting.
- Roof pitches from 15° - 90°.

Plain tiles EDP

- For plain tiles (max length 300mm).
- Maximum thickness of 14mm.
- Roof pitches from 25° - 90°.

Slate EDL

- For slate up to 8mm thick.
- Not for interlocking slate. See EDW for details.
- Roof pitches from 15° - 90°.

Flat tiles EDT

- For flat tiles 15-40mm thick.
- Designed for a neater finish.
- Roof pitches from 20° - 90°.



EDW



EDL



EDP



EDT

| External frame sizes (w×h) cm | CK02  | CK04  | CK06   | FK06   | MK04  | MK06   | MK08   | PK06   | PK08   | PK10   | SK06    | SK08    | UK04   | UK08    |
|-------------------------------|-------|-------|--------|--------|-------|--------|--------|--------|--------|--------|---------|---------|--------|---------|
|                               | 55×78 | 55×98 | 55×118 | 66×118 | 78×98 | 78×118 | 78×140 | 94×118 | 94×140 | 94×160 | 114×118 | 114×140 | 134×98 | 134×140 |
|                               |       |       |        |        |       |        |        |        |        |        |         |         |        |         |

| Pro+ flashing set including Insulation collar (BDX) and Underfelt collar (BFX) |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|--------------------------------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| EDW 2000                                                                       | 103 | 106 | 111 | 119 | 119 | 125 | 133 | 142 | 149 | 153 | 147 | 157 | 157 | 169 |
| EDL 2000                                                                       | 103 | 106 | 111 | 119 | 119 | 125 | 133 | 142 | 149 | 153 | 147 | 157 | 157 | 169 |
| EDP 2000                                                                       | 103 | 106 | 111 | 119 | 119 | 125 | 133 | 142 | 149 | 153 | 147 | 157 | 157 | 169 |
| EDT 2000                                                                       | 146 | 149 | 156 | 168 | 168 | 176 | 188 | 200 | 210 | 216 | 208 | 221 | 221 | 238 |

| External frame sizes (w×h) cm                     | CK02 | CK04 | CK06 |
|---------------------------------------------------|------|------|------|
|                                                   |      |      |      |
| Pro flashing set including Underfelt collar (BFX) |      |      |      |
| EDW 1000                                          | 95   | 97   | 101  |
| EDL 1000                                          | 95   | 97   | 101  |
| EDP 1000                                          | 95   | 97   | 101  |
| EDT 1000                                          | 134  | 137  | 143  |

The 1000 variant containing Underfelt collar (BFX) is available in sizes CK--.  
Suitable for rafter openings where there is insufficient tolerance for the Insulation collar (BDX).

All prices in GBP (£)  
Find all flashing types, sizes and prices at [velux.co.uk](http://velux.co.uk)






EDN




EDJ

Roof pitch



Colour options



Dark grey  
(Standard)

Recessed installation height

- Recessed flashings provide a sleek and streamlined finish as the roof window is installed 40mm deeper into the roof structure, meaning that less of the roof window protrudes above the roofline.



- Install the brackets at the sides of the roof window frame, at the blue line level.



Recessed flashings

The Pro+ (2000) flashing set comes with an Underfelt collar (BFX) for a watertight seal between the roof window, the roof and the Insulation collar (BDX) for heat loss reduction and elimination of cold bridges.

Slate EDN

- For slate up to 8mm thick.
- Not for interlocking slate.
- Roof pitches from 20° - 90°.

Flat or profiled roofing material EDJ

- For flat or profiled roofing material up to 90mm in profile.
- Roof pitches from 20° - 90°.

The Pro (1000) flashing set comes with Underfelt collar (BFX) for a watertight seal between the roof window and the roof.

| External frame sizes (w×h) cm | CK02                                                                                  | CK04                                                                                  | CK06                                                                                  | FK06                                                                                  | MK04                                                                                  | MK06                                                                                  | MK08                                                                                  | PK06                                                                                  | PK08                                                                                  | PK10                                                                                  | SK06                                                                                  | SK08                                                                                  | UK04                                                                                  | UK08                                                                                  |
|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                               | 55×78                                                                                 | 55×98                                                                                 | 55×118                                                                                | 66×118                                                                                | 78×98                                                                                 | 78×118                                                                                | 78×140                                                                                | 94×118                                                                                | 94×140                                                                                | 94×160                                                                                | 114×118                                                                               | 114×140                                                                               | 134×98                                                                                | 134×140                                                                               |
|                               |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

Pro+ flashing set including Insulation collar (BDX) and Underfelt collar (BFX)

|          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| EDN 2000 | 166 | 169 | 177 | 190 | 190 | 200 | 213 | 231 | 238 | 246 | 236 | 251 | 251 | 270 |
| EDJ 2000 | 161 | 165 | 173 | 186 | 186 | 195 | 208 | 221 | 232 | 239 | 230 | 245 | 245 | 263 |

| External frame sizes (w×h) cm | CK02                                                                                  | CK04                                                                                  | CK06                                                                                  |
|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                               | 55×78                                                                                 | 55×98                                                                                 | 55×118                                                                                |
|                               |  |  |  |


Pro flashing set including Underfelt collar (BFX)

|          |     |     |     |
|----------|-----|-----|-----|
| EDN 1000 | 152 | 155 | 162 |
| EDJ 1000 | 148 | 151 | 158 |


The 1000 variant containing Underfelt collar (BFX) is available in sizes CK--.  
Suitable for rafter openings where there is insufficient tolerance for the Insulation collar (BDX).

All prices in GBP (£)  
Find all flashing types, sizes and prices at [velux.co.uk](https://www.velux.co.uk)




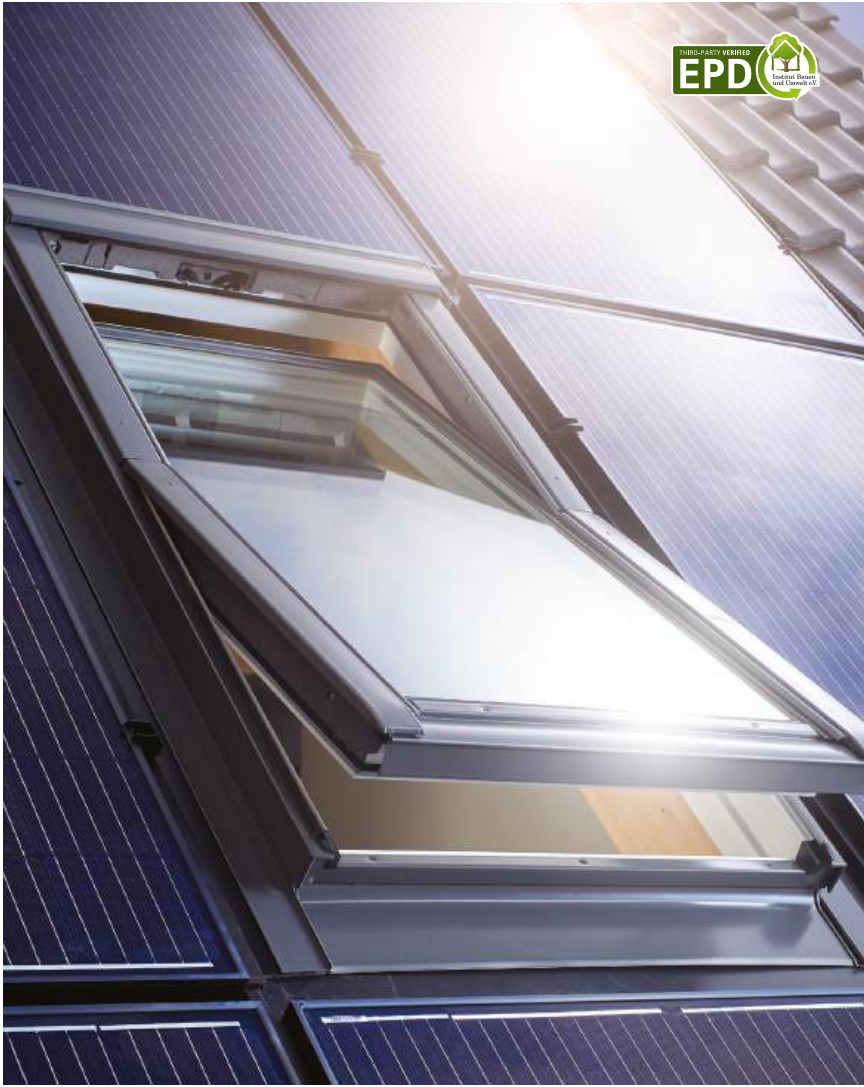

Roof pitch



Flashing colour options




Integration options

- Visit [velux.com/solarintegrator](https://www.velux.com/solarintegrator) for an up-to-date overview of all the partners involved.

Availability and ordering process

- To ensure the perfect integration of VELUX roof windows into an in-roof solar panel system, you need the VELUX roof window and VELUX Solar integrator flashing. The connector for the connection to the solar panel system is available from the solar panel provider.

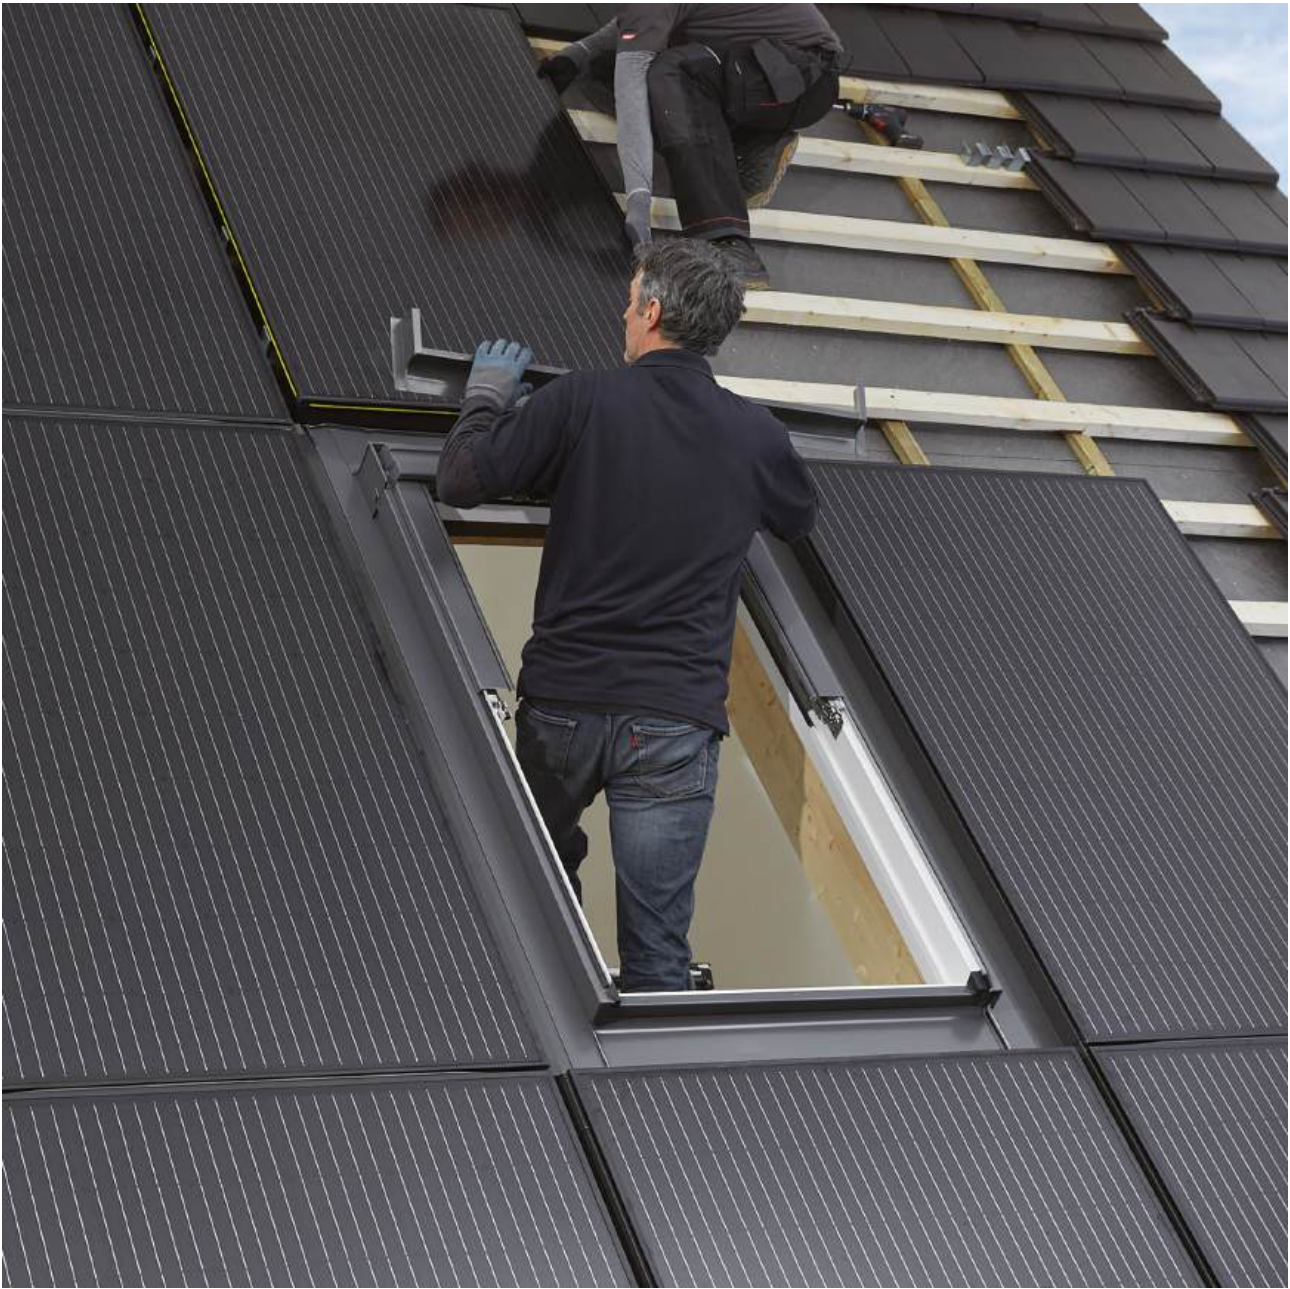

# Solar integrator

Flashing for integrating VELUX roof windows into in-roof solar panel systems

Live a healthy, sustainable and comfortable life.

This specially developed flashing system enables seamless integration between VELUX roof windows and a variety of built-in solar panel systems. The roof can then be used to its full potential – generating solar energy while creating a comfortable living space.

- Fits perfectly into the PV panel allowing for a fast, secure and seamless integration.
- No need to compromise – enjoy daylight through the roof, a healthy indoor environment and reduced energy usage and costs, all at once.
- The flashing does not cover or block the active part of the solar panel, ensuring maximum energy generation.
- A range of installation position permutations allows flexibility in design and installation.
- Easily integrates with selected PV solar panel systems for optimal roof utilisation.

Find EPDs at [velux.co.uk/technical-library](https://www.velux.co.uk/technical-library)

| External frame sizes (w×h) cm   |                                                                                    | MK06                                                                                  | MK08                                                                                  | MK10                                                                                  | PK06                                                                                  | PK08                                                                                  | PK10                                                                                  | SK10                                                                                  |
|---------------------------------|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                                 |                                                                                    | 78×118                                                                                | 78×140                                                                                | 78×160                                                                                | 94×118                                                                                | 94×140                                                                                | 94×160                                                                                | 114×160                                                                               |
|                                 |                                                                                    |  |  |  |  |  |  |  |
| VELUX Solar integrator flashing |                                                                                    |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
| ODL 2500                        | Black. For GSE and Viridian solar panel solutions                                  | 150                                                                                   | 160                                                                                   | 176                                                                                   | 170                                                                                   | 178                                                                                   | 184                                                                                   | 196                                                                                   |
| ODL 2000                        | Grey. For GSE and Viridian solar panel solutions                                   | 150                                                                                   | 160                                                                                   | 176                                                                                   | 170                                                                                   | 178                                                                                   | 184                                                                                   | 196                                                                                   |
| Flashing                        |                                                                                    |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
| New OKL 2521M                   | Combi flashing for 2 windows side-by side, black for GSE and Viridian solar panels | 371                                                                                   | 396                                                                                   | 435                                                                                   | 420                                                                                   | 442                                                                                   | 456                                                                                   | 484                                                                                   |

Compatible with selected solar panel systems.

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://www.velux.co.uk)





EW



EL



Type signs for old roof windows manufactured before April 2001.

## Replacement flashings

VELUX replacement flashings make it easy to replace VELUX roof windows without removing the existing lining. The roof windows are simply replaced in the existing aperture. This lets you enjoy a new roof window without the extra work involved in interior decoration or bathroom retiling.

### Profiled roofing material EW

- For replacing a VELUX roof window from before April 2001 while maintaining the original installation level of the roof window.
- For profiled roofing material up to 120mm.


### Slate EL

- For replacing a VELUX roof window from before April 2001 while maintaining the original installation level of the roof window.
- EL is a flashing for slate up to 8mm thick.

### Flashing adaptor ELX

- The flashing adaptor kit ELX is used for replacing roof window combinations and also in conjunction with standard single flashings like EDW and EDL. However, this is only when replacing an old roof window where the internal finish is not being replaced and the roof window is placed higher above the red line than normal.

## Roof pitch



15°-90°/80°

EW 15°-90°  
EL 15°-90°  
ELX 15°- 80°

## Details

- Minimal disruption as existing lining is retained.
- On most occasions, the work can be carried out from the inside.
- Replacement installation for a single roof window usually takes under a day.
- For flat or profiled roofing material.

## Benefits of replacing your roof window

- Energy saving of up to 16% – modern roof windows have better thermal insulation properties. By replacing an old roof window with a new GGU-66 roof window you will have a heating energy saving of up to 16%.
- More light and fresh air – new VELUX roof windows have larger glazed areas and come in white finishes to match modern interiors.
- More choice, more comfort – modernise your roof windows; from improving noise reduction to controlling from your smartphone, there's a solution for every project.



Upgrading your old roof windows couldn't be easier.  
Get a price in as little as 5 minutes, visit [velux.co.uk/quickquote](https://www.velux.co.uk/quickquote)

| External frame sizes (w x h) cm                                                                             | CK01       | CK02  | CK04       | FK06   | MK04       | MK06        | MK08       | PK08   | PK10       | SK06       | UK04       | UK08       |
|-------------------------------------------------------------------------------------------------------------|------------|-------|------------|--------|------------|-------------|------------|--------|------------|------------|------------|------------|
|                                                                                                             | 55×70      | 55×78 | 55×98      | 66×118 | 78×98      | 78×118      | 78×140     | 94×140 | 94×160     | 114×118    | 134×98     | 134×140    |
|                                                                                                             |            |       |            |        |            |             |            |        |            |            |            |            |
| For replacing single roof windows installed before April 2001, window size to be replaced shown in brackets | 101<br>(9) | 102   | 104<br>(6) | 206    | 304<br>(1) | 306<br>(14) | 308<br>(2) | 408    | 410<br>(3) | 606<br>(4) | 804<br>(7) | 808<br>(8) |


| Replacement flashings |                                                                                   |     |     |     |     |     |     |     |     |     |     |     |
|-----------------------|-----------------------------------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| EW 1000               | Flashings for profiled roof material up to 120mm including underfelt collar (BFX) | 108 | 108 | 111 | 124 | 124 | 131 | 139 | 156 | 161 | 154 | 177 |
| EL 1000               | Flashings for slate up to 8mm thick including underfelt collar (BFX)              | 108 | 108 | 111 | 124 | 124 | 131 | 139 | 156 | 161 | 154 | 177 |
| ELX 0000              | Adaptor flashings for combinations Also for use in conjunction with EDL and EDW   | 80  | 80  | 81  | 92  | 92  | 96  | 102 | 114 | 118 | 113 | 130 |

| Replacement flashings incl. Insulation collar (BDX) and Underfelt Collar (BFX) |                                                                                    |     |     |     |     |     |     |     |     |     |     |     |
|--------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| EW 6000F                                                                       | Flashings for profiled roof material up to 120mm including insulation collar (BDX) | 126 | 126 | 128 | 144 | 144 | 152 | 162 | 180 | 186 | 179 | 205 |
| EL 6000F                                                                       | Flashings for slate up to 8mm thick including insulation collar (BDX)              | 126 | 126 | 128 | 144 | 144 | 152 | 162 | 180 | 186 | 179 | 205 |





## Roof pitch



EKW 15° - 90°  
EKL 15° - 90°  
EKP 25° - 90°  
EKN 20° - 90°  
EKJ 20° - 90°

## Colour options



Dark grey  
(Standard)


## More ways to combine



Classic side-by-side  
or triple with rafters  
in between. (2---M or  
0---E flashing sets).

Integrated side-by-side  
or triple without rafters  
in between. (4-21E or  
4-31E flashing sets).

## Overview of combination elements

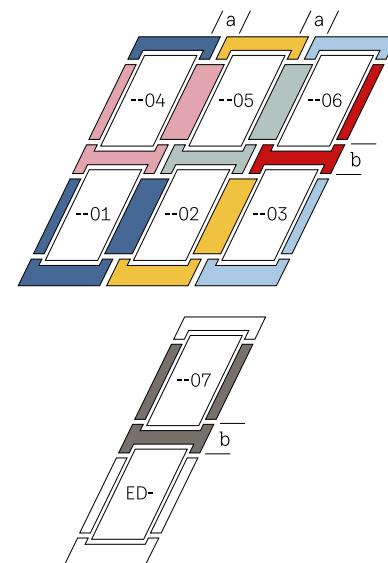

# The combination system

If you want to install roof windows in combination, the combination flashing system lets you do so efficiently. The system can be used for combining all main roof window types in your preferred formation.

## The system consists of seven elements that enable your chosen combination

### For a roof window combination to function together, it is required that:

- Roof windows above each other are the same width.
- Roof windows next to each other are the same height.

### a. Frame distance per flashing type

- EKW/EKL/EKP/EKN/EKJ: flexibility between 100 - 160mm (M) with the Adjustable middle gutter.
- Other frame distances between 60mm - 400mm can be specially ordered.

### b. Standard frame distance 100mm (E)

- When installing an exterior shutter, a frame distance of 250mm (J) is needed.



# VELUX Pro+ combination flashing set

The VELUX Pro+ combination flashing set includes made-to-fit and easy-to-install insulation and watertight collars. These components reduce heat loss and cold bridges and provide extra security against water penetration.

This set also features the VELUX Adjustable middle gutter – our innovative and patented solution that makes roof window combination installations even easier. The middle gutter can be adjusted to widths between 100 - 160mm, ensuring that it always fits to the actual rafter dimensions, giving peace of mind when it's not possible to obtain exact measurements.


Add value to your projects by installing bigger and better solutions to bring more of the outdoors in.

- Everything you need in one order.
- Includes VELUX Adjustable middle gutter.
- Ensures a watertight seal between the roof windows, battens and the roofing underfelt.
- Reduces heat loss and eliminates cold bridges.
- Ensures perfect installations every time.


## All you need in one box\*



Flashing



Adjustable middle gutter



Underfelt collar (BFX)



Insulation collar (BDX)

\* Contents illustrated for EKW MK06 2021M side-by-side combination.




Flashings for combinations

If you want to use multiple VELUX roof windows in your room, VELUX combination flashings give you the interconnectivity needed for easy installation. They are designed for all combinations of VELUX roof windows and give a watertight installation.

- For multiple VELUX roof windows.
- High-quality watertight installation.
- Maintenance-free exterior.



Roof pitch



EKW 15° - 90°  
EKL 15° - 90°  
EKP 25° - 90°  
EKN 20° - 90°  
EKJ 20° - 90°

Integrated side-by-side combination

| External frame sizes (w×h) cm | CK02  | CK04  | CK06   | FK06   | MK04  | MK06   | MK08   | PK06   | PK08   | PK10   | SK06    | SK08    | UK04   | UK08    |
|-------------------------------|-------|-------|--------|--------|-------|--------|--------|--------|--------|--------|---------|---------|--------|---------|
|                               | 55×78 | 55×98 | 55×118 | 66×118 | 78×98 | 78×118 | 78×140 | 94×118 | 94×140 | 94×160 | 114×118 | 114×140 | 134×98 | 134×140 |
|                               |       |       |        |        |       |        |        |        |        |        |         |         |        |         |

Flashing for 18mm frame distance

|                                                       |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| EBW 4021B2* for profiled roofing material up to 120mm | 481 | 498 | 526 | 554 | 547 | 578 | 613 | 635 | 668 | 690 | 685 | 724 | 711 | 772 |
| EBL 4021B2* for slate up to 8mm thick                 | 481 | 498 | 526 | 554 | 547 | 578 | 613 | 635 | 668 | 690 | 685 | 724 | 711 | 772 |
| EBP 4021B2* for plain tile up to 28mm (2 x 14mm)      | 481 | 498 | 526 | 554 | 547 | 578 | 613 | -   | 668 | 690 | 685 | -   | 711 | 772 |

Flashing for 100mm frame distance\*\*

|                                                                                  |     |     |     |     |     |     |     |     |     |     |     |     |     |       |
|----------------------------------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-------|
| EKW 4021E2* for profiled roofing material up to 120mm                            | 465 | 481 | 508 | 535 | 528 | 558 | 592 | 612 | 644 | 666 | 661 | 698 | 685 | 745   |
| EKL 4021E2* for slate up to 8mm thick                                            | 465 | 481 | 508 | 535 | 528 | 558 | 592 | 612 | 644 | 666 | 661 | 698 | 685 | 745   |
| EKP 4021E2* for plain tile up to 28mm (2 x 14mm)                                 | 465 | 481 | 508 | 535 | 528 | 558 | 592 | -   | 644 | 666 | 661 | -   | 685 | 745   |
| EKJ 4021E2* for recessed installation into profiled roofing material up to 120mm | 671 | 690 | 721 | 753 | 746 | 781 | 821 | 847 | 885 | 910 | 901 | 945 | 932 | 1,001 |
| EKN 4021E2* for recessed installation into slate up to 8mm thick                 | 671 | 690 | 721 | 753 | 746 | 781 | 821 | 847 | 885 | 910 | 901 | 945 | 932 | 1,001 |

\* Includes installation products (BDX 2000, bearing beams and cover plate).

\*\* Choose 100 mm frame distance if roller shutters are needed.

All prices in GBP (£)

Find all flashing types, sizes and prices at velux.co.uk

Classic side-by-side combination

| External frame sizes (w×h) cm | CK02  | CK04  | CK06   | FK06   | MK04  | MK06   | MK08   | PK06   | PK08   | PK10   | SK06    | SK08    | UK04   | UK08    |
|-------------------------------|-------|-------|--------|--------|-------|--------|--------|--------|--------|--------|---------|---------|--------|---------|
|                               | 55×78 | 55×98 | 55×118 | 66×118 | 78×98 | 78×118 | 78×140 | 94×118 | 94×140 | 94×160 | 114×118 | 114×140 | 134×98 | 134×140 |

Flashing for 18mm frame distance

|                                                     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| EBW 2021B for profiled roofing material up to 120mm | 244 | 250 | 261 | 281 | 281 | 295 | 314 | 334 | 351 | 362 | 348 | 371 | 371 | 399 |
| EBL 2021B for slate up to 8mm thick                 | 244 | 250 | 261 | 281 | 281 | 295 | 314 | 334 | 351 | 362 | 348 | 371 | 371 | 399 |
| EBP 2021B for plain tile up to 28mm (2 x 14mm)      | 244 | 250 | 261 | 281 | 281 | 295 | 314 | -   | 351 | 362 | 348 | -   | 371 | 399 |

Flashing for 100mm frame distance

|                                                                                 |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|---------------------------------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| EKW 2021M* for profiled roofing material up to 120mm                            | 228 | 233 | 243 | 262 | 262 | 275 | 293 | 311 | 327 | 338 | 324 | 345 | 345 | 372 |
| EKL 2021M* for slate up to 8mm thick                                            | 228 | 233 | 243 | 262 | 262 | 275 | 293 | 311 | 327 | 338 | 324 | 345 | 345 | 372 |
| EKP 2021M* for plain tile up to 28mm (2 x 14mm)                                 | 228 | 233 | 243 | 262 | 262 | 275 | 293 | -   | 327 | 338 | 324 | -   | 345 | 372 |
| EKJ 2021M* for recessed installation into profiled roofing material up to 120mm | 306 | 314 | 328 | 352 | 352 | 370 | 394 | 418 | 440 | 454 | 436 | 464 | 464 | 500 |
| EKN 2021M* for recessed installation into slate up to 8mm thick                 | 306 | 314 | 328 | 352 | 352 | 370 | 394 | 418 | 440 | 454 | 436 | 464 | 464 | 500 |

\* Includes adjustable middle gutter and installation products.



Integrated triple combination

| External frame sizes (w×h) cm | CK02  | CK04  | CK06   | FK06   | MK04  | MK06   | MK08   | PK06   | PK08   | PK10   | SK06    | SK08    | UK04   | UK08    |
|-------------------------------|-------|-------|--------|--------|-------|--------|--------|--------|--------|--------|---------|---------|--------|---------|
|                               | 55×78 | 55×98 | 55×118 | 66×118 | 78×98 | 78×118 | 78×140 | 94×118 | 94×140 | 94×160 | 114×118 | 114×140 | 134×98 | 134×140 |
|                               |       |       |        |        |       |        |        |        |        |        |         |         |        |         |

Flashing for 18mm frame distance

|                                                       |     |     |     |     |     |     |       |   |   |   |   |   |   |   |
|-------------------------------------------------------|-----|-----|-----|-----|-----|-----|-------|---|---|---|---|---|---|---|
| EBW 4031B2* for profiled roofing material up to 120mm | 768 | 799 | 850 | 915 | 901 | 956 | 1,018 | - | - | - | - | - | - | - |
| EBL 4031B2* for slate up to 8mm thick                 | 768 | 799 | 850 | 915 | 901 | 956 | 1,018 | - | - | - | - | - | - | - |

Flashing for 100mm frame distance†

|                                                       |     |     |     |     |     |     |       |     |     |     |     |     |     |     |
|-------------------------------------------------------|-----|-----|-----|-----|-----|-----|-------|-----|-----|-----|-----|-----|-----|-----|
| EKW 4031E2* for profiled roofing material up to 120mm | 744 | 773 | 823 | 887 | 873 | 926 | 986   | -   | -   | -   | -   | -   | -   | -   |
| EKL 4031E2* for slate up to 8mm thick                 | 744 | 773 | 823 | 887 | 873 | 945 | 1,002 | -   | -   | -   | -   | -   | -   | -   |
| EKW 3031E2† for profiled roofing material up to 120mm | -   | -   | -   | -   | -   | -   | -     | 781 | 837 | 875 | 800 | 864 | 798 | 904 |
| EKL 3031E2† for slate up to 8mm thick                 | -   | -   | -   | -   | -   | -   | -     | 781 | 837 | 875 | 800 | 864 | 798 | 904 |

Classic triple combination

Flashing for 100mm frame distance

|                                                         |     |     |     |     |     |     |     |     |     |     |     |   |     |     |
|---------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|---|-----|-----|
| EKW S0313**** for profiled roofing material up to 120mm | 342 | 349 | 365 | 393 | 393 | 412 | 440 | 467 | 491 | 507 | 486 | - | 518 | 558 |
| EKL S0313 **** for slate up to 8mm thick                | 342 | 349 | 365 | 393 | 393 | 431 | 456 | 467 | 491 | 507 | 486 | - | 518 | 558 |

\* Includes installation products (BDX 2000, bearing beams and cover plate).

\*\* Choose 100mm frame distance if Anti-heat blackout shutters are needed.

\*\*\* Includes Adjustable middle gutter and installation products.

\*\*\*\* Includes installation products BDX 2000.

† Includes installation products (BDX 2000 and cover plate).

For Integrated triple see page 46 for additional information.

All prices in GBP (£)

Find all flashing types, sizes and prices at velux.co.uk





Quattro combination

|                               | CK02                                                                              | CK04                                                                              | CK06                                                                              | FK06                                                                              | MK04                                                                              | MK06                                                                              | MK08                                                                              | PK06                                                                              | PK08                                                                              | PK10                                                                                | SK06                                                                                | SK08                                                                                | UK04                                                                                | UK08                                                                                |
|-------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| External frame sizes (w×h) cm | 55×78                                                                             | 55×98                                                                             | 55×118                                                                            | 66×118                                                                            | 78×98                                                                             | 78×118                                                                            | 78×140                                                                            | 94×118                                                                            | 94×140                                                                            | 94×160                                                                              | 114×118                                                                             | 114×140                                                                             | 134×98                                                                              | 134×140                                                                             |
|                               |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

Flashing for 100mm frame distance

|                                                      |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| EKW S0229* for profiled roofing material up to 120mm | 524 | 535 | 559 | 602 | 602 | 633 | 675 | 715 | 753 | 776 | 746 | 795 | 795 | 856 |
| EKL S0225* for slate up to 8mm thick                 | 524 | 535 | 559 | 602 | 602 | 633 | 675 | 715 | 753 | 776 | 746 | 795 | 795 | 856 |

For Quattro combination see page 48 for additional information.



Duo combination

|                               | CK02                                                                                | CK04                                                                                | CK06                                                                                | FK06                                                                                | MK04                                                                                | MK06                                                                                | MK08                                                                                | PK06                                                                                | PK08                                                                                | PK10                                                                                  | SK06                                                                                  | SK08                                                                                  | UK04                                                                                  | UK08                                                                                  |
|-------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| External frame sizes (w×h) cm | 55×78                                                                               | 55×98                                                                               | 55×118                                                                              | 66×118                                                                              | 78×98                                                                               | 78×118                                                                              | 78×140                                                                              | 94×118                                                                              | 94×140                                                                              | 94×160                                                                                | 114×118                                                                               | 114×140                                                                               | 134×98                                                                                | 134×140                                                                               |
|                               |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

Flashing for 100mm frame distance

|                                                       |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| EKW S00W02* for profiled roofing material up to 120mm | 251 | 257 | 269 | 289 | 289 | 304 | 324 | 344 | 362 | 372 | 358 | 382 | 382 | 411 |
| EKL S00L02* for slate up to 8mm thick                 | 251 | 257 | 269 | 289 | 289 | 304 | 324 | 344 | 362 | 372 | 358 | 382 | 382 | 411 |

For Duo combination see page 50 for additional information.  
\* Includes installation products BDX 2000.

All prices in GBP (£)  
Find all flashing types, sizes and prices at velux.co.uk



Sloping and fixed

|                               | MK04                                                                                | MK06                                                                                | MK08                                                                                | PK06                                                                                | PK08                                                                                | PK10                                                                                | SK06                                                                                | SK08                                                                                | UK04                                                                                | UK08                                                                                |
|-------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| External frame sizes (w×h) cm | 78×98                                                                               | 78×118                                                                              | 78×140                                                                              | 94×118                                                                              | 94×140                                                                              | 94×160                                                                              | 114×118                                                                             | 114×140                                                                             | 134×98                                                                              | 134×140                                                                             |
|                               |  |  |  |  |  |  |  |  |  |  |

Flashing for upper element

|                                                                               |     |     |     |     |     |     |     |     |     |     |
|-------------------------------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| EDW 2000* for profiled roofing material up to 120mm                           | 119 | 125 | 133 | 142 | 149 | 153 | 147 | 157 | 157 | 169 |
| EDL 2000* for slate up to 8mm thick                                           | 119 | 125 | 133 | 142 | 149 | 153 | 147 | 157 | 157 | 169 |
| EDJ 2000* for recessed installation into profiled roofing material up to 90mm | 186 | 195 | 208 | 221 | 232 | 239 | 230 | 245 | 245 | 263 |
| EDN 2000 * for recessed installation into slate up to 8mm thick               | 190 | 200 | 213 | 231 | 238 | 246 | 236 | 251 | 251 | 270 |

Flashing for extension element

|                                                                              | WK34 |
|------------------------------------------------------------------------------|------|
| ETW 2000 for profiled roofing material up to 120mm                           | 79   |
| ETL 2000 for slate up to 8mm thick                                           | 79   |
| ETJ 2000 for recessed installation into profiled roofing material up to 90mm | 168  |
| ETN 2000 for recessed installation into slate up to 8mm thick                | 168  |

For Sloping and fixed see page 52 for additional information. \* Includes installation products BDX 2000.



Sloping and vertical

|                               | MK04                                                                                  | MK06                                                                                  | MK08                                                                                  | PK06                                                                                  | PK08                                                                                  | PK10                                                                                  | SK06                                                                                  | SK08                                                                                  | UK04                                                                                  | UK08                                                                                  |
|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| External frame sizes (w×h) cm | 78×98                                                                                 | 78×118                                                                                | 78×140                                                                                | 94×118                                                                                | 94×140                                                                                | 94×160                                                                                | 114×118                                                                               | 114×140                                                                               | 134×98                                                                                | 134×140                                                                               |
|                               |  |  |  |  |  |  |  |  |  |  |

Flashing

|                                                                              |     |     |     |     |     |     |     |     |     |     |
|------------------------------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| EFW 2012 for profiled roofing material up to 120mm                           | 208 | 219 | 233 | 248 | 260 | 269 | 258 | 275 | 275 | 296 |
| EFL 2012 for slate up to 8mm thick                                           | 208 | 219 | 233 | 248 | 260 | 269 | 258 | 275 | 275 | 296 |
| EFJ 2012 for recessed installation into profiled roofing material up to 90mm | 357 | 375 | 400 | 425 | 446 | 460 | 442 | 471 | 471 | 507 |
| EFN 2012 for recessed installation into slate up to 8mm thick                | 357 | 375 | 400 | 425 | 446 | 460 | 442 | 471 | 471 | 507 |

For Sloping and vertical see page 54 for additional information.  
\* Includes installation products BDX 2000.

All prices in GBP (£)  
Find all flashing types, sizes and prices at velux.co.uk





BBX 0000



BBX 1000

Vapour barrier including lining sub-construction

Prevent condensation

Save time and hassle by using the VELUX vapour barrier collar that fits perfectly into the groove of the roof window. The vapour barrier collar guarantees an airtight solution, preventing condensation forming in the roof construction.

- Fits perfectly to the dimensions of the roof window.
- Pre-fitted rubber seals throughout guarantee a vapour-tight solution.
- Unique application tool ensures one-step procedure.

Reduce cold bridges and installation time

The new VELUX lining sub-construction reduces cold bridges by providing additional space for insulation around the roof window. This increases the surface temperature of the roof window and improves indoor climate. The sub-construction is quick and easy to install and it provides a stable structure for securing the insulation and cutting lining boards to the perfect size.

- Reduces cold bridges by creating extra room for insulation.
- Enables lining design without a facing.
- Fast and secure installation.

| External frame sizes (w×h) cm | CK02  | CK04  | CK06   | FK06   | MK04  | MK06   | MK08   | PK06   | PK08   | PK10   | SK06    | UK04   |
|-------------------------------|-------|-------|--------|--------|-------|--------|--------|--------|--------|--------|---------|--------|
|                               | 55×78 | 55×98 | 55×118 | 66×118 | 78×98 | 78×118 | 78×140 | 94×118 | 94×140 | 94×160 | 114×118 | 134×98 |
|                               |       |       |        |        |       |        |        |        |        |        |         |        |


From February to August 2026

|          |  |    |    |    |    |    |    |    |    |    |    |    |    |
|----------|--|----|----|----|----|----|----|----|----|----|----|----|----|
| BBX 0000 |  | 30 | 31 | 32 | 33 | 33 | 35 | 36 | 36 | 38 | 39 | 38 | 38 |
|----------|--|----|----|----|----|----|----|----|----|----|----|----|----|

NEW from September 2026


|          |                                   |    |    |    |    |    |    |    |    |    |    |    |    |
|----------|-----------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|
| BBX 1000 | Including lining sub-construction | 40 | 41 | 43 | 45 | 45 | 47 | 49 | 49 | 51 | 53 | 51 | 51 |
|----------|-----------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|

Roof pitch



Characteristics


- The perpendicular design at the top and bottom of the lining sub-construction creates an extra 70mm space for insulation.

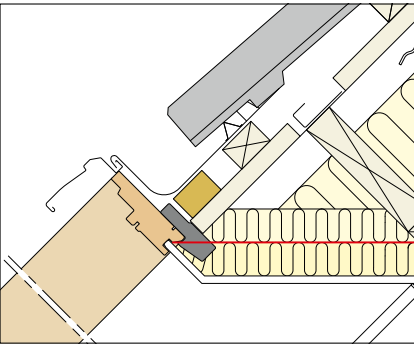

- The lining sub-construction is mounted on the roof window in under five minutes saving valuable time compared to a traditional lining construction.



Roof pitch




Characteristics

- The white finish provides maximum daylight influx.



- The shape ensures correct warm air circulation that helps to prevent condensation.

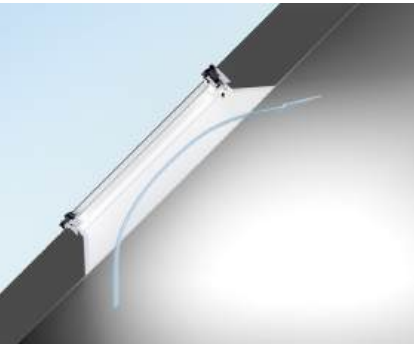

Lining

If you want a ready-made solution, our prefabricated linings make installation easy, with no need for additional painting or adhesives.

VELUX linings are made in water-resistant and maintenance-free PVC material and fit perfectly with VELUX roof windows.

- Click-on brackets save time and ensure correct installation.
- Design allows extra insulation and minimises cold bridges.
- Includes BBX vapour barrier for an airtight seal.

| External frame sizes (w×h) cm | CK02  | CK04  | CK06   | FK06   | MK04  | MK06   | MK08   | PK06   | PK08   | SK06    | UK04   |
|-------------------------------|-------|-------|--------|--------|-------|--------|--------|--------|--------|---------|--------|
|                               | 55×78 | 55×98 | 55×118 | 66×118 | 78×98 | 78×118 | 78×140 | 94×118 | 94×140 | 114×118 | 134×98 |
|                               |       |       |        |        |       |        |        |        |        |         |        |

White PVC Lining including BBX

|          |                                |     |     |     |     |     |     |     |     |     |     |     |
|----------|--------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| LSB 2000 | For roof thickness up to 300mm | 188 | 192 | 196 | 200 | 200 | 204 | 212 | 212 | 216 | 218 | 232 |
| LSC 2000 | For roof thickness up to 400mm | 233 | 238 | 243 | 248 | 248 | 253 | 263 | 263 | 268 | 270 | 288 |
| LSD 2000 | For roof thickness up to 500mm | 377 | 385 | 394 | 402 | 402 | 410 | 426 | 426 | 435 | 439 | 459 |





**5-year guarantee** for solar and electric Anti-heat blackout shutters, Anti-heat blackout blinds, Anti-heat blinds and interior blinds.  
**3-year guarantee\*** for manual interior blinds, insect screens and manual exterior Anti-heat blinds.

\* Except Basic blackout blind, which comes with a 2-year guarantee.

# Blinds and shutters

|                                 |         |
|---------------------------------|---------|
| <b>Heat protection products</b> | Page 96 |
| Combined interior and exterior  |         |
| Anti-heat blackout shutter      |         |
| Anti-heat blackout blind        |         |
| Anti-heat blind                 |         |

|                       |          |
|-----------------------|----------|
| <b>Roller blinds</b>  | Page 102 |
| Nature collection     |          |
| Children's collection |          |
| Colour by You         |          |
| Blackout              |          |
| Duo blackout          |          |
| Basic blackout        |          |
| Translucent           |          |

|                       |          |
|-----------------------|----------|
| <b>Pleated blinds</b> | Page 112 |
| Blackout energy       |          |
| Translucent           |          |

|                        |          |
|------------------------|----------|
| <b>Venetian blinds</b> | Page 116 |
|------------------------|----------|

|                      |          |
|----------------------|----------|
| <b>Insect screen</b> | Page 117 |
|----------------------|----------|

Blinds for flat roof windows can be found on page 128 and 136.



# Optimal light and climate control for all year round comfort

## Focus Complete solution

VELUX roof windows fill your home with daylight and fresh air. Having the right weather and sun protection also ensures a pleasant indoor climate and helps save energy.

### Exterior weather and heat protection

Choose Anti-heat blinds and shutters to create a shield between the sun's rays and the roof windows to prevent direct sunlight from entering the home. Rain noise is also significantly reduced.

More information from page 96.

### Interior light control

Choose interior blinds to complement a room, soften incoming light or provide privacy or blackout to ensure a good night's sleep or a daytime nap. In the colder months, they will help to keep the room warm and create a cosy atmosphere.

More information from page 102.

### Anti-heat blackout shutter + Blackout energy pleated blind

Up to 5°C\* cooler in summer + heat energy savings in winter.

### Add insect screens to enjoy fresh air without unwanted visitors

More information from page 117.

\* Data from a simulated south-facing room with two VELUX GGU 70 roof windows in size MK06 (78.0 x 117.8cm), July – August 2023, recorded in London. Based on a study by VELUX 2023 on the effects of accessories in summer.





# Combine interior and exterior blinds for optimal comfort

Buy your interior and exterior blind together and save 10%



Find your perfect pairing with a manual interior blind and exterior Anti-heat blind.

- Combine a manual interior blind and exterior Anti-heat blind and enjoy double the benefit, for less.
- Interior blinds are available in 4 standard colours and in 2 side rail options – white or brushed aluminium.
- The manual Anti-heat blind comes with simple-to-handle hook fixing for positioning on the outside of your roof window.
- Transparent fabric lets in light and retains the view to the outside.
- Easy self-installation from the inside.




Heat protection plus blackout (DOP)\*  
Anti-heat blind + Blackout roller blind



Colour options

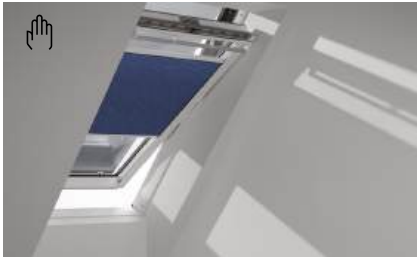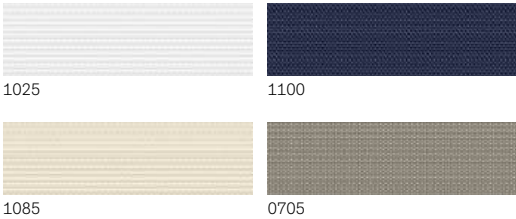


Heat protection plus blackout and insulation (FOP)\*  
Anti-heat blind + Blackout energy pleated blind

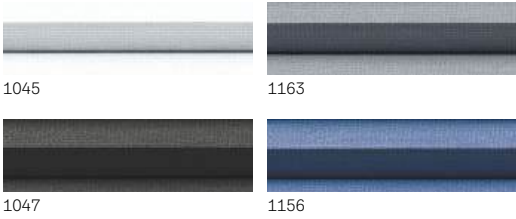


Heat protection plus light dimming (ROF)\*  
Anti-heat blind + Translucent roller blind

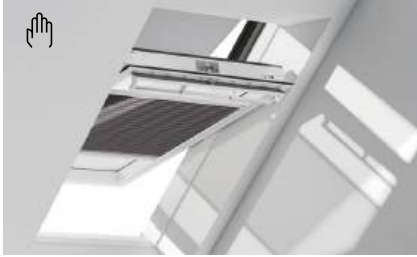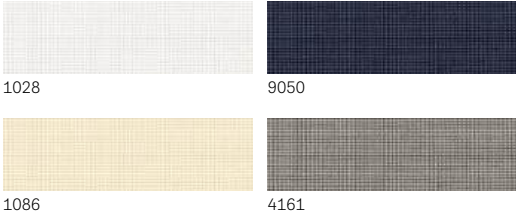

Heat protection plus light dimming (FOL)\*  
Anti-heat blind + Translucent pleated blind

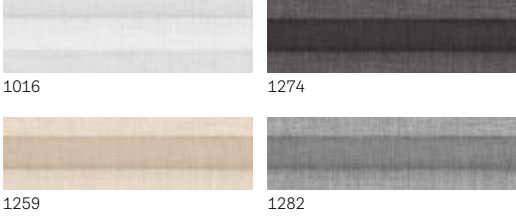

\* DOP, ROF, FOP and FOL: Are not suitable for GGU, GPU white maintenance-free roof windows with a 3-digit reference number (eg GGU 304), or for GGLS roof windows.

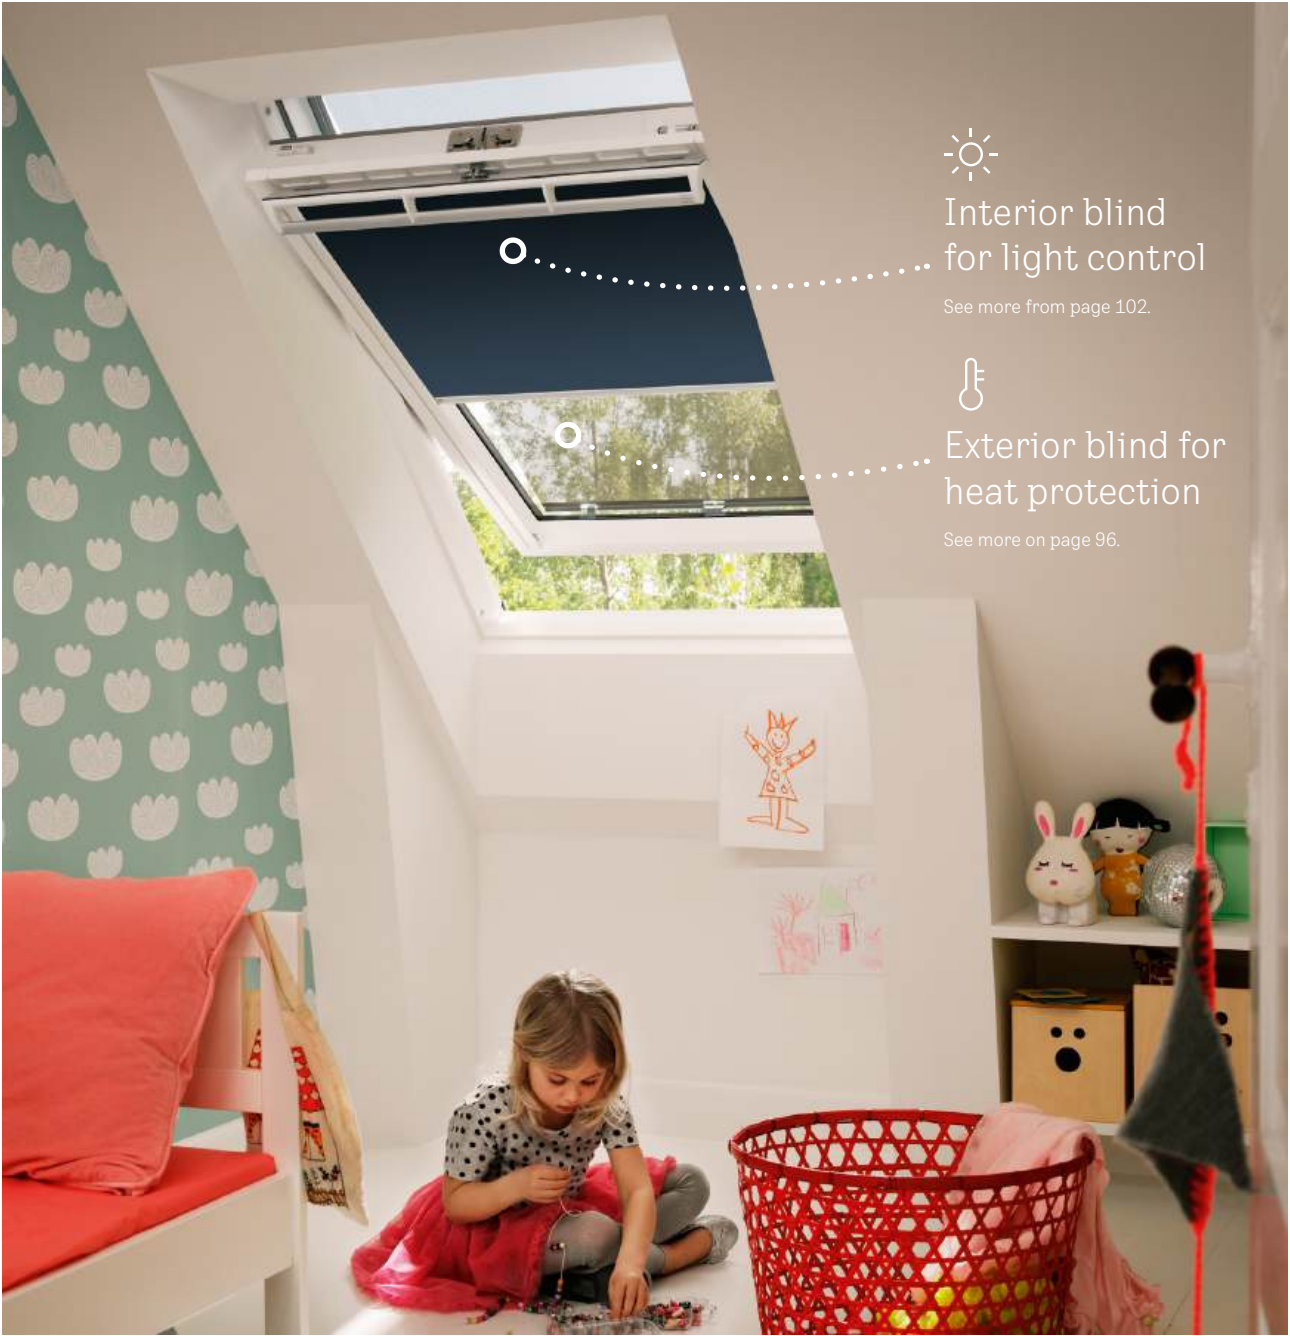

| Most sold window sizes |  |                           | CK01<br>C01              | CK02<br>C02              | CK04<br>C04              | CK06<br>C06              | FK06<br>F06              | MK04<br>M04              | MK06<br>M06              | MK08<br>M08              | PK04<br>P04              | PK08<br>P08              | PK10<br>P10              | SK06<br>S06              | UK04<br>U04              | UK08<br>U08              |
|------------------------|--|---------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Sizes (w×h) cm         |  |                           | 55×70                    | 55×78                    | 55×98                    | 55×118                   | 66×118                   | 78×98                    | 78×118                   | 78×140                   | 94×98                    | 94×140                   | 94×160                   | 114×118                  | 134×98                   | 134×140                  |
| Manual operation       |  |                           | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|                        |  | DOP K sizes, e.g. MK04    | 132                      | 132                      | 137                      | 144                      | 160                      | 164                      | 169                      | 175                      | 189                      | 200                      | 207                      | 216                      | 227                      | 243                      |
|                        |  | DOP Non K sizes, e.g. M04 | 126                      | 126                      | 130                      | 137                      | 151                      | 155                      | 160                      | 166                      | 180                      | 191                      | 196                      | 205                      | 216                      | 230                      |
|                        |  | FOP                       | 152                      | 152                      | 159                      | 168                      | 185                      | 187                      | 195                      | 204                      | 216                      | 232                      | 239                      | 248                      | 261                      | 281                      |
|                        |  | ROF                       | 132                      | 132                      | 137                      | 144                      | 160                      | 164                      | 169                      | 175                      | 189                      | 200                      | 207                      | 216                      | 227                      | 243                      |
|                        |  | FOL                       | 143                      | 143                      | 148                      | 157                      | 172                      | 175                      | 182                      | 189                      | 201                      | 216                      | 223                      | 232                      | 245                      | 263                      |

To order the blind with white side rails, simply add WL to the end of your product code. Find all sizes, prices and more related products at [velux.co.uk](https://www.velux.co.uk)



# Blinds and shutters selection guide

Find the ideal solution that protects from the outdoor elements and controls heat and light inside.

|                                                                                     |                                                                                                                                                                                         | Operation |                                                                                         |                                                                                              |                                                                                            | Function |                                                                                                     |                                                                                              |                                                                                                |                                                                                                     |                                                                                             |                                                                                                     |                                                                                                         |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|----------|-----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
|                                                                                     |                                                                                                                                                                                         | More info |  Solar |  Electric |  Manual |          |  Heat protection |  Blackout |  Insulation |  Light filtering |  Privacy |  Noise reduction |  Burglary prevention |
| Exterior heat protection                                                            |                                                                                                                                                                                         |           |                                                                                         |                                                                                              |                                                                                            |          |                                                                                                     |                                                                                              |                                                                                                |                                                                                                     |                                                                                             |                                                                                                     |                                                                                                         |
|    | <b>Anti-heat blackout shutter</b><br>Enjoy superior heat protection, blackout and insulation all year round.                                                                            | page 97   | SSL                                                                                     | SML / SMH                                                                                    | -                                                                                          |          | <div><div></div><div></div><div></div><div></div></div>                                             | <div><div></div><div></div><div></div><div></div></div>                                      | <div><div></div><div></div></div>                                                              | -                                                                                                   | <div><div></div><div></div><div></div><div></div></div>                                     | <div><div></div><div></div><div></div></div>                                                        | <div><div></div><div></div><div></div></div>                                                            |
|    | <b>Anti-heat blackout blind</b><br>Effective heat protection and blackout for comfort day and night.                                                                                    | page 98   | SSS                                                                                     | -                                                                                            | -                                                                                          |          | <div><div></div><div></div><div></div><div></div></div>                                             | <div><div></div><div></div><div></div></div>                                                 | <div><div></div></div>                                                                         | -                                                                                                   | <div><div></div><div></div><div></div><div></div></div>                                     | <div><div></div><div></div><div></div></div>                                                        | -                                                                                                       |
|   | <b>Anti-heat blind</b><br>Offers heat protection whilst still allowing light in and retaining your view to the outside.                                                                 | page 99   | MSL                                                                                     | MML                                                                                          | MHL                                                                                        |          | <div><div></div><div></div><div></div></div>                                                        | -                                                                                            | -                                                                                              | <div><div></div><div></div><div></div></div>                                                        | <div><div></div><div></div></div>                                                           | <div><div></div><div></div><div></div></div>                                                        | -                                                                                                       |
| Interior light control                                                              |                                                                                                                                                                                         |           |                                                                                         |                                                                                              |                                                                                            |          |                                                                                                     |                                                                                              |                                                                                                |                                                                                                     |                                                                                             |                                                                                                     |                                                                                                         |
|  | <b>Blackout roller blind</b><br>Sleep well day or night. The ideal solution to darken the room.                                                                                         | page 106  | DSL                                                                                     | DML                                                                                          | DKL                                                                                        |          | <div><div></div></div>                                                                              | <div><div></div><div></div><div></div><div></div></div>                                      | <div><div></div><div></div></div>                                                              | -                                                                                                   | <div><div></div><div></div><div></div><div></div></div>                                     | -                                                                                                   | -                                                                                                       |
|  | <b>Duo blackout roller blind</b><br>Two blinds in one: a blackout blind for a good night's sleep and a pleated blind to diffuse light and increase privacy.                             | page 108  | -                                                                                       | -                                                                                            | DFD                                                                                        |          | <div><div></div></div>                                                                              | <div><div></div><div></div><div></div><div></div></div>                                      | <div><div></div><div></div></div>                                                              | <div><div></div><div></div><div></div><div></div></div>                                             | <div><div></div><div></div><div></div><div></div></div>                                     | -                                                                                                   | -                                                                                                       |
|  | <b>Blackout energy pleated blind</b><br>Perfect for bedrooms that need blackout at night and extra insulation against the cold.                                                         | page 113  | FSC                                                                                     | FMC                                                                                          | FHC                                                                                        |          | <div><div></div></div>                                                                              | <div><div></div><div></div><div></div><div></div></div>                                      | <div><div></div><div></div><div></div></div>                                                   | -                                                                                                   | <div><div></div><div></div><div></div><div></div></div>                                     | -                                                                                                   | -                                                                                                       |
|  | <b>Basic blackout blind</b><br>Provides a blackout effect. Ideal for replacing an old blind with a cost-effective solution. Only compatible with roof windows manufactured before 2014. | page 109  | -                                                                                       | -                                                                                            | DBL                                                                                        |          | <div><div></div></div>                                                                              | <div><div></div><div></div><div></div></div>                                                 | <div><div></div></div>                                                                         | -                                                                                                   | <div><div></div><div></div><div></div><div></div></div>                                     | -                                                                                                   | -                                                                                                       |
|  | <b>Translucent roller blind</b><br>Offers privacy whilst still allowing natural light in.                                                                                               | page 110  | RSL                                                                                     | RML                                                                                          | RFL                                                                                        |          | -                                                                                                   | -                                                                                            | -                                                                                              | <div><div></div><div></div><div></div><div></div></div>                                             | <div><div></div><div></div><div></div></div>                                                | -                                                                                                   | -                                                                                                       |
|  | <b>Translucent pleated blind</b><br>Provides an excellent way to control daylight and add a decorative touch.                                                                           | page 114  | FSL                                                                                     | FML                                                                                          | FHL                                                                                        |          | -                                                                                                   | -                                                                                            | -                                                                                              | <div><div></div><div></div><div></div><div></div></div>                                             | <div><div></div><div></div><div></div></div>                                                | -                                                                                                   | -                                                                                                       |
|  | <b>Venetian blind</b><br>A classic, moisture-resistant light-dimming and privacy solution that's easy to clean.                                                                         | page 116  | -                                                                                       | -                                                                                            | PAL                                                                                        |          | <div><div></div></div>                                                                              | <div><div></div></div>                                                                       | -                                                                                              | <div><div></div><div></div><div></div></div>                                                        | <div><div></div><div></div><div></div></div>                                                | -                                                                                                   | -                                                                                                       |



# Outdoor protection, indoor comfort all year round

Our wide range of VELUX exterior Anti-heat products helps protect your home from overheating in the summer and provides extra insulation on cold days, keeping your indoor temperature comfortable. Our solar products use daylight energy as their power source, eliminating the need for wiring and offering a seamless installation from inside the room.

### All year round temperature control

Create a shield between the sun's rays and your roof windows to prevent the direct sunlight from entering your home. This helps to keep the indoor temperature cooler, reducing the need for air conditioning and lowering energy costs. In colder months, shutters provide an additional shield from the outside to keep the warmth in.

### Durability and longevity

Crafted from high-quality materials, our Anti-heat blinds and shutters are designed to withstand the harshest weather conditions, while maintaining their functionality and visual appeal for years to come.

### Easy installation

Designed to seamlessly match your VELUX roof windows, our products offer a hassle-free installation. With installation taking place from inside the room, you'll have your new Anti-heat blinds or shutters up in no time!

Discover the exterior blind or shutter that best meets the needs of your home.

### Anti-heat blackout shutter

Heat protection, blackout and insulation

See more on page 97.



|  |                     |   |   |   |   |
|--|---------------------|---|---|---|---|
|  | Heat protection     | ● | ● | ● | ● |
|  | Blackout            | ● | ● | ● | ● |
|  | Insulation          | ● | ● |   |   |
|  | Daylight exposure   |   |   |   |   |
|  | Burglary prevention | ● | ● | ● |   |
|  | Weather protection  | ● | ● | ● | ● |

### Anti-heat blackout blind

Heat protection and blackout

See more on page 98.



|  |                     |   |   |   |   |
|--|---------------------|---|---|---|---|
|  | Heat protection     | ● | ● | ● | ● |
|  | Blackout            | ● | ● | ● |   |
|  | Insulation          | ● |   |   |   |
|  | Daylight exposure   |   |   |   |   |
|  | Burglary prevention |   |   |   |   |
|  | Weather protection  | ● | ● |   |   |

### Anti-heat blind

Heat protection and transparency

See more on page 99.



|  |                     |   |   |   |  |
|--|---------------------|---|---|---|--|
|  | Heat protection     | ● | ● | ● |  |
|  | Blackout            |   |   |   |  |
|  | Insulation          |   |   |   |  |
|  | Daylight exposure   | ● | ● | ● |  |
|  | Burglary prevention |   |   |   |  |
|  | Weather protection  | ● |   |   |  |



Up to 5°C cooler inside\*



Aluminium profiles: 0000

### Indoor climate

- Heat protection, blackout and insulation all year round.

|  |                     |   |   |   |   |
|--|---------------------|---|---|---|---|
|  | Heat protection     | ● | ● | ● | ● |
|  | Blackout            | ● | ● | ● | ● |
|  | Insulation          | ● | ● |   |   |
|  | Daylight exposure   |   |   |   |   |
|  | Burglary prevention | ● | ● | ● |   |
|  | Weather protection  | ● | ● | ● | ● |

### Remotes and Apps

- Easily control your VELUX solar and electric products with our remote controls or apps.

Read more on page 23.

## Anti-heat blackout shutter

Take full control of your indoor comfort with the superior heat protection and blackout offered by the VELUX Anti-heat blackout shutter. The ideal choice for year-round use, the sturdy aluminium shield exterior offers the very best outdoor protection.

- All-in-one protection.
- Best heat protection and sun screening.

- Excellent blackout.
- Provides an additional shield from the outside to keep the warmth in the room during colder months.
- Rain noise reduction.
- Effective protection of roof window and against break-ins.
- Can be combined with a decorative interior blind and an Insect screen.

| Most sold window sizes | CK01 C01 | CK02 C02 | CK04 C04 | CK06 C06 | FK06 F06 | MK04 M04 | MK06 M06 | MK08 M08 | PK04 P04 | PK08 P08 | PK10 P10 | SK06 S06 | UK04 U04 | UK08 U08 |
|------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Sizes (w×h) cm         | 55×70    | 55×78    | 55×98    | 55×118   | 66×118   | 78×98    | 78×118   | 78×140   | 94×98    | 94×140   | 94×160   | 114×118  | 134×98   | 134×140  |
|                        |          |          |          |          |          |          |          |          |          |          |          |          |          |          |
|                        | 517      | 517      | 553      | 570      | 594      | 588      | 617      | 653      | 635      | 705      | 741      | 717      | 711      | 829      |
|                        | 389      | 389      | 415      | 429      | 446      | 442      | 464      | 491      | 477      | 530      | 557      | 539      | 535      | 623      |
|                        | -        | -        | -        | -        | 625      | -        | 650      | 687      | -        | 743      | -        | 755      | -        | -        |

KUX 110 control system is needed if you install an SML into a manually operated VELUX roof window. SSL and SML can be installed on roof windows one above the other, at least 25cm apart and SMH at least 30cm apart and on roof windows next to each other at least 10cm apart.


\* Data from a simulated south-facing room with two VELUX GGU 70 roof windows in size MK06 (78.0 x 117.8cm), July – August 2023, recorded in London. Based on a study by VELUX 2023 on the effects of accessories in summer.

\*\* For installation on solar-powered roof windows or added solar openers for manual roof windows, please contact VELUX Customer Service to ensure compatibility.

\*\*\* SMH is designed for VELUX electric top-hung roof windows.

All prices in GBP (£)  
Find all sizes, prices and more related products at [velux.co.uk](https://www.velux.co.uk)  
Find EPDs at [velux.co.uk/technical-library](https://www.velux.co.uk/technical-library)



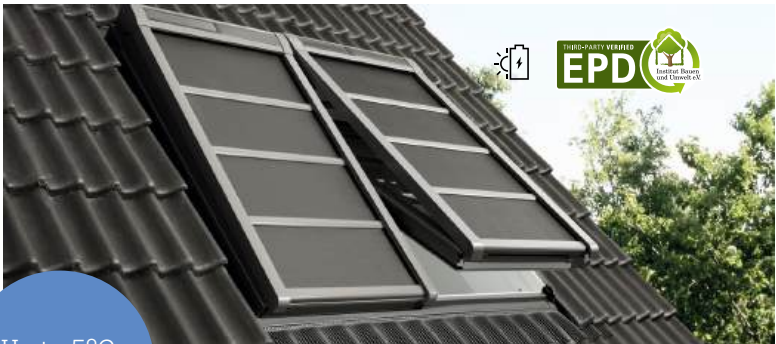

Up to 5°C cooler inside\*



## Anti-heat blackout blind

Beat the heat with this effective combination. VELUX Anti-heat blackout blinds block heat and light and are ideal for those who want to keep comfortable indoors on hot days and sleep better on warm nights. Solar powered and easy to install with no need for wiring.

- Effective combination.
- Great heat protection.
- Blocks out light.
- Rain noise reduction.
- Tough, durable polyester fabric.
- Easy self-installation from inside the room.
- Can be combined with a decorative interior blind and an Insect screen.

| Most sold window sizes | CK01 C01 | CK02 C02 | CK04 C04 | CK06 C06 | FK06 F06 | MK04 M04 | MK06 M06 | MK08 M08 | PK04 P04 | PK08 P08 | PK10 P10 | SK06 S06 | UK04 U04 | UK08 U08 |
|------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Sizes (w×h) cm         | 55×70    | 55×78    | 55×98    | 55×118   | 66×118   | 78×98    | 78×118   | 78×140   | 94×98    | 94×140   | 94×160   | 114×118  | 134×98   | 134×140  |
|                        |          |          |          |          |          |          |          |          |          |          |          |          |          |          |
| Solar SSS**            | 311      | 311      | 332      | 343      | 357      | 354      | 371      | 392      | 382      | 424      | 446      | 431      | 428      | 499      |

For old VELUX roof window generations (VES), a ZOZ 238 installation kit set is needed.

For VELUX electric top-hung roof windows, a ZOZ 229S kit set is needed.

\* Data from a simulated south-facing room with two VELUX GGU 70 roof windows in size MK06 (78.0 x 117.8cm), July – August 2023, recorded in London. Based on a study by VELUX 2023 on the effects of accessories in summer.

\*\* For installation on solar-powered roof windows or added solar openers for manual roof windows, please contact VELUX Customer Service to ensure compatibility.



Solid blackout fabric 0000

### Indoor climate

- Heat protection and blackout all year round.

|  |                     |   |   |   |   |
|--|---------------------|---|---|---|---|
|  | Heat protection     | ● | ● | ● | ● |
|  | Blackout            | ● | ● | ● |   |
|  | Insulation          | ● |   |   |   |
|  | Daylight exposure   |   |   |   |   |
|  | Burglary prevention |   |   |   |   |
|  | Weather protection  | ● | ● |   |   |

### Remotes and Apps

- Easily control your VELUX solar products with our remote controls or apps.

Read more on page 23.

All prices in GBP (£)  
Find all sizes, prices and more related products at [velux.co.uk](https://www.velux.co.uk)  
Find EPDs at [velux.co.uk/technical-library](https://www.velux.co.uk/technical-library)



Up to 4°C cooler inside\*



## Anti-heat blind

Keep your indoors cool and comfortable all day with VELUX Anti-heat blinds that block incoming heat before it ever hits your VELUX roof windows. The ideal choice for home offices or living rooms where you want cooler temperatures and to reduce glare on sunny days.

- Effective heat reduction.
- Transparent fabric lets in light and retains the view to the outside.
- Rain noise reduction.
- Easy self-installation from inside the room.
- Can be combined with a decorative interior blind and an Insect screen.

| Most sold window sizes | CK01 C01 | CK02 C02 | CK04 C04 | CK06 C06 | FK06 F06 | MK04 M04 | MK06 M06 | MK08 M08 | PK04 P04 | PK08 P08 | PK10 P10 | SK06 S06 | UK04 U04 | UK08 U08 |
|------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Sizes (w×h) cm         | 55×70    | 55×78    | 55×98    | 55×118   | 66×118   | 78×98    | 78×118   | 78×140   | 94×98    | 94×140   | 94×160   | 114×118  | 134×98   | 134×140  |
|                        |          |          |          |          |          |          |          |          |          |          |          |          |          |          |
| Solar MSL**            | 252      | 252      | 270      | 278      | 290      | 288      | 302      | 318      | 310      | 344      | 362      | 350      | 348      | 406      |
| Electric MML           | 252      | 252      | 270      | 278      | 290      | 288      | 302      | 318      | 310      | 344      | 362      | 350      | 348      | 406      |
| Manual MHL             | 74       | 74       | 74       | 74       | 86       | 92       | 92       | 92       | 108      | 108      | 108      | 120      | 130      | 130      |


For old VELUX roof window generations (VES), a ZOZ 238 installation kit set is needed.

For VELUX electric top-hung roof windows, a ZOZ 229S kit set is needed.

KUX 110 control system is needed if you install an MML into a manually operated VELUX roof window.

\* Data from a simulated south-facing room with two VELUX GGU 70 roof windows in size MK06 (78.0 x 117.8cm), July – August 2023, recorded in London. Based on a study by VELUX 2023 on the effects of accessories in summer.

\*\* For installation on solar-powered roof windows or added solar openers for manual roof windows, please contact VELUX Customer Service to ensure compatibility.



Transparent fabric 5060

### Indoor climate

- Heat protection and transparency all year round.

|  |                     |   |   |   |
|--|---------------------|---|---|---|
|  | Heat protection     | ● | ● | ● |
|  | Blackout            |   |   |   |
|  | Insulation          |   |   |   |
|  | Daylight exposure   | ● | ● | ● |
|  | Burglary prevention |   |   |   |
|  | Weather protection  | ● |   |   |

### Remotes and Apps

- Easily control your VELUX solar and electric products with our remote controls or apps.

Read more on page 23.

All prices in GBP (£)  
Find all sizes, prices and more related products at [velux.co.uk](https://www.velux.co.uk)  
Find EPDs at [velux.co.uk/technical-library](https://www.velux.co.uk/technical-library)



# More flexible and intuitive than ever before

Our solar and electric blinds range can be easily operated remotely or manually via a slider, positioned directly on the product.

## The design offers a number of product benefits:

### Optimised design

The slimmer profile along the bottom of the blind integrates seamlessly with the roof window, providing an unobstructed view and maximum daylight.

### Quieter motor

Regardless of operation, the motor runs almost without sound.

### A solution to suit everyone

Available in a wide range of colours and fabrics including blackout, energy pleated and translucent.

### Even longer guarantee

Comes with an extended guarantee of 5 years.



**Unique design**  
Available in a wide range of colours.

**Slimmer profile**  
Lets in maximum daylight.

**Multiple operation**  
Operate remotely or manually via the slider.





CO<sub>2</sub> reduced  
with recycled  
materials



Translucent roller blind RFY



Blackout roller blind DKY

## Nature collection

For design and environmentally-conscious consumers, our Nature collection roller blinds come in a range of colours that allow you to bring the peace and tranquility of nature directly into your home. The blinds are made from a minimum 50% recycled fabric and 75% recycled aluminium and have a lower carbon footprint than the standard option. This allows you to enjoy the same high quality as every VELUX product but, with a 50% reduced carbon footprint during production compared to ordinary VELUX blinds.

### Blackout roller blind DKY

- Excellent blackout to darken the room.

### Translucent roller blind RFY

- Softens incoming light and provides privacy.

### Blackout roller blind DKY and Translucent roller blind RFY

- Available with white or brushed aluminium side rails.
- Combine with an exterior Anti-heat blind or shutter for effective heat protection. Read more on page 96.
- Combine with an Insect screen to enjoy fresh air without unwanted visitors. Read more on page 117.

### Colour options

#### Blackout roller blind DKY



Forest  
4901



Marsh  
4902



Lake  
4903



Cave  
4904

#### Translucent roller blind RFY



Clouds  
4951



Dunes  
4952



Woods  
4953



Cliffs  
4954

### ✓ Installation – it just clicks

- Click the blind on. Add side rails. That's it. Original VELUX blinds are tailored to your roof window, making installation fast and easy.

### Certifications

- OEKO-TEX® STANDARD 100 (2276-378) – The original safety standard.
- OEKO-TEX® STeP (22002567) – Responsible production for people and planet.
- Our products hold verified EPD certificates complying with the European Standard EN 15804+A2.



| Most sold window sizes                                                                |                  |     | CK01<br>C01                                                                           | CK02<br>C02                                                                           | CK04<br>C04                                                                           | CK06<br>C06                                                                           | FK06<br>F06                                                                           | MK04<br>M04                                                                           | MK06<br>M06                                                                           | MK08<br>M08                                                                           | PK04<br>P04                                                                           | PK08<br>P08                                                                           | PK10<br>P10                                                                           | SK06<br>S06                                                                           | UK04<br>U04                                                                           | UK08<br>U08                                                                           |
|---------------------------------------------------------------------------------------|------------------|-----|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Sizes (w×h) cm                                                                        |                  |     | 55×70                                                                                 | 55×78                                                                                 | 55×98                                                                                 | 55×118                                                                                | 66×118                                                                                | 78×98                                                                                 | 78×118                                                                                | 78×140                                                                                | 94×98                                                                                 | 94×140                                                                                | 94×160                                                                                | 114×118                                                                               | 134×98                                                                                | 134×140                                                                               |
|                                                                                       |                  |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|  | Manual operation | DKY | 84                                                                                    | 84                                                                                    | 90                                                                                    | 100                                                                                   | 106                                                                                   | 102                                                                                   | 110                                                                                   | 118                                                                                   | 116                                                                                   | 132                                                                                   | 140                                                                                   | 138                                                                                   | 142                                                                                   | 162                                                                                   |
|                                                                                       |                  | RFY | 84                                                                                    | 84                                                                                    | 90                                                                                    | 100                                                                                   | 106                                                                                   | 102                                                                                   | 110                                                                                   | 118                                                                                   | 116                                                                                   | 132                                                                                   | 140                                                                                   | 138                                                                                   | 142                                                                                   | 162                                                                                   |

To order the blind with white side rails, simply add WL to the end of your product code.

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://www.velux.co.uk)  
Find EPDs at [velux.co.uk/technical-library](https://www.velux.co.uk/technical-library)





## Children’s collection

The greatest adventures start with a good night’s sleep. VELUX Children’s collection blinds feature inspirational and cheerful designs made for childrens’ rooms. Available as a Blackout blind or as Duo blackout blind that combines blackout and light dimming in one solution.

### Blackout roller blind DKL

- Excellent blackout to darken the room.

### Duo blackout roller blind DFD

- Two ways to control light in one solution – blackout the room completely or soften incoming light.
- Choose any Children’s collection Blackout roller blind combined with a white pleated blind.

### Blackout roller blind DKL and Duo blackout roller blind DFD

- Available with white or brushed aluminium side rails.
- Combine with an exterior Anti-heat blind or shutter for effective heat protection. Read more on page 96.
- Combine with an Insect screen to enjoy fresh air without unwanted visitors. Read more on page 117.

| Most sold window sizes                                                                                  |     |                       | CK02 C02                                                                            | CK04 C04                                                                            | CK06 C06                                                                            | FK06 F06                                                                            | MK04 M04                                                                            | MK06 M06                                                                            | MK08 M08                                                                            | PK04 P04                                                                            | PK08 P08                                                                              | PK10 P10                                                                              | SK06 S06                                                                              | UK04 U04                                                                              | UK08 U08                                                                              |
|---------------------------------------------------------------------------------------------------------|-----|-----------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Sizes (w×h) cm                                                                                          |     |                       | 55×78                                                                               | 55×98                                                                               | 55×118                                                                              | 66×118                                                                              | 78×98                                                                               | 78×118                                                                              | 78×140                                                                              | 94×98                                                                               | 94×140                                                                                | 94×160                                                                                | 114×118                                                                               | 134×98                                                                                | 134×140                                                                               |
|                                                                                                         |     |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |
| <br>Manual operation | DKL | K sizes, e.g. MK04    | 84                                                                                  | 90                                                                                  | 100                                                                                 | 106                                                                                 | 102                                                                                 | 110                                                                                 | 118                                                                                 | 116                                                                                 | 132                                                                                   | 140                                                                                   | 138                                                                                   | 142                                                                                   | 162                                                                                   |
|                                                                                                         | DKL | Non K sizes, e.g. M04 | 76                                                                                  | 82                                                                                  | 90                                                                                  | 94                                                                                  | 92                                                                                  | 100                                                                                 | 106                                                                                 | 106                                                                                 | 118                                                                                   | 126                                                                                   | 124                                                                                   | 128                                                                                   | 146                                                                                   |
|                                                                                                         | DFD |                       | 110                                                                                 | 118                                                                                 | 130                                                                                 | 138                                                                                 | 134                                                                                 | 144                                                                                 | 154                                                                                 | 152                                                                                 | 172                                                                                   | 182                                                                                   | 178                                                                                   | 184                                                                                   | 210                                                                                   |

To order the blind with white side rails, simply add WL to the end of your product code.

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://www.velux.co.uk)

### Colour options



Mobile  
4665



Hot air balloons  
4666



Kites  
4667



Universe  
4653



Racing cars  
4654



Roads  
4655



Pink stars  
4659



Blue sky  
4660



Green stars  
4661

### ✓ Installation – it just clicks

- Click the blind on. Add side rails. That's it. Original VELUX blinds are tailored to your roof window, making installation fast and easy.

### Certifications

- OEKO-TEX® STANDARD 100 (1076-184) – The original safety standard.
- OEKO-TEX® STeP (22002567) – Responsible production for people and planet.



## Colour by You

The Colour by You collection lets you customise your roller blinds. Choose from thousands of colours to create the look that you’ve been dreaming of. Get inspired by trying the colour selection tool at [veluxblindsdirect.co.uk](https://www.veluxblindsdirect.co.uk) and start customising your blinds today.


- Available for Translucent roller blind (RFL, RML, RSL), Blackout roller blind (DKL, DML, DSL) and Duo blackout roller blind (DFD). All with a choice of white or brushed aluminium side rails.
- Combine with an exterior Anti-heat blind or shutter for effective heat protection. Read more on page 96.
- Combine with an Insect screen to enjoy fresh air without unwanted visitors. Read more on page 117.

| Most sold window sizes                                                                                    |     | CK01 C01                                                                              | CK02 C02                                                                              | CK04 C04                                                                              | CK06 C06                                                                              | FK06 F06                                                                              | MK04 M04                                                                              | MK06 M06                                                                              | MK08 M08                                                                              | PK04 P04                                                                              | PK08 P08                                                                              | PK10 P10                                                                              | SK06 S06                                                                              | UK04 U04                                                                              | UK08 U08                                                                              |
|-----------------------------------------------------------------------------------------------------------|-----|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Sizes (w×h) cm                                                                                            |     | 55×70                                                                                 | 55×78                                                                                 | 55×98                                                                                 | 55×118                                                                                | 66×118                                                                                | 78×98                                                                                 | 78×118                                                                                | 78×140                                                                                | 94×98                                                                                 | 94×140                                                                                | 94×160                                                                                | 114×118                                                                               | 134×98                                                                                | 134×140                                                                               |
|                                                                                                           |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| <br>Solar            | RSL | 196                                                                                   | 196                                                                                   | 202                                                                                   | 212                                                                                   | 218                                                                                   | 214                                                                                   | 222                                                                                   | 230                                                                                   | 228                                                                                   | 244                                                                                   | 252                                                                                   | 250                                                                                   | 254                                                                                   | 274                                                                                   |
|                                                                                                           | DSL | 196                                                                                   | 196                                                                                   | 202                                                                                   | 212                                                                                   | 218                                                                                   | 214                                                                                   | 222                                                                                   | 230                                                                                   | 228                                                                                   | 244                                                                                   | 252                                                                                   | 250                                                                                   | 254                                                                                   | 274                                                                                   |
| <br>Electric         | RML | 196                                                                                   | 196                                                                                   | 202                                                                                   | 212                                                                                   | 218                                                                                   | 214                                                                                   | 222                                                                                   | 230                                                                                   | 228                                                                                   | 244                                                                                   | 252                                                                                   | 250                                                                                   | 254                                                                                   | 274                                                                                   |
|                                                                                                           | DML | 196                                                                                   | 196                                                                                   | 202                                                                                   | 212                                                                                   | 218                                                                                   | 214                                                                                   | 222                                                                                   | 230                                                                                   | 228                                                                                   | 244                                                                                   | 252                                                                                   | 250                                                                                   | 254                                                                                   | 274                                                                                   |
| <br>Manual operation | RFL | 84                                                                                    | 84                                                                                    | 90                                                                                    | 100                                                                                   | 106                                                                                   | 102                                                                                   | 110                                                                                   | 118                                                                                   | 116                                                                                   | 132                                                                                   | 140                                                                                   | 138                                                                                   | 142                                                                                   | 162                                                                                   |
|                                                                                                           | DKL | K sizes, e.g. MK04                                                                    | 84                                                                                    | 84                                                                                    | 90                                                                                    | 106                                                                                   | 102                                                                                   | 110                                                                                   | 118                                                                                   | 116                                                                                   | 132                                                                                   | 140                                                                                   | 138                                                                                   | 142                                                                                   | 162                                                                                   |
|                                                                                                           | DKL | Non K sizes, e.g. M04                                                                 | 76                                                                                    | 76                                                                                    | 82                                                                                    | 90                                                                                    | 94                                                                                    | 92                                                                                    | 100                                                                                   | 106                                                                                   | 118                                                                                   | 126                                                                                   | 124                                                                                   | 128                                                                                   | 146                                                                                   |
|                                                                                                           | DFD |                                                                                       | 110                                                                                   | 110                                                                                   | 118                                                                                   | 138                                                                                   | 134                                                                                   | 144                                                                                   | 154                                                                                   | 152                                                                                   | 172                                                                                   | 182                                                                                   | 178                                                                                   | 184                                                                                   | 210                                                                                   |

To order the blind with white side rails, simply add WL to the end of your product code.

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://www.velux.co.uk)



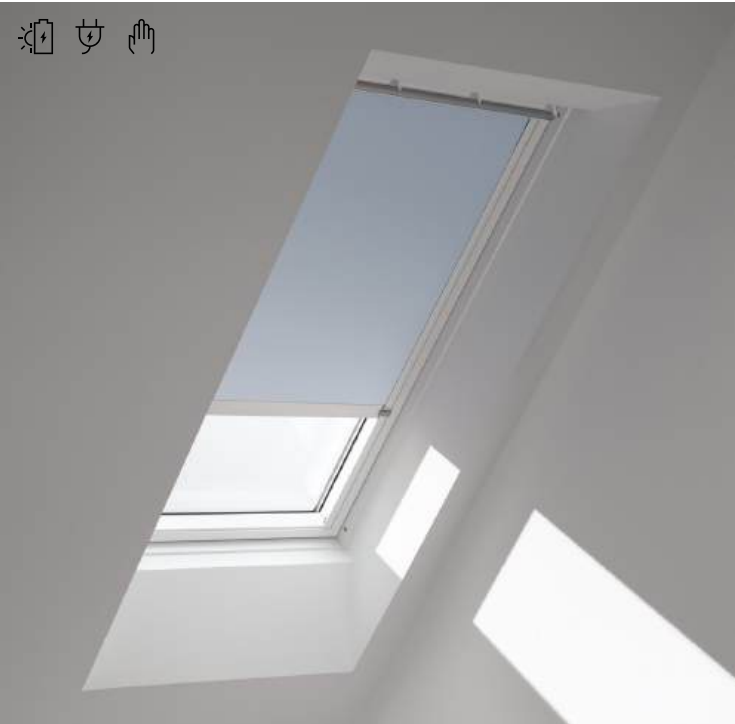

# Blackout roller blind

The VELUX Blackout roller blind offers blackout for darkness anytime, ideal for bedrooms to ensure a good night's sleep or a daytime nap.

- Excellent blackout.
- Upgrade to a solar or electric blind to enjoy complete light-control at your fingertips.
- Available with white or brushed aluminium side rails.
- Combine your manual blind with an Anti-heat blind and save 10%. Read more on page 92.
- Combine with an Insect screen to enjoy fresh air without unwanted visitors. Read more on page 117.


| Most sold window sizes                                                                           |          |                       | CK01<br>C01                                                                         | CK02<br>C02                                                                         | CK04<br>C04                                                                         | CK06<br>C06                                                                         | FK06<br>F06                                                                         | MK04<br>M04                                                                         | MK06<br>M06                                                                         | MK08<br>M08                                                                         | PK04<br>P04                                                                         | PK08<br>P08                                                                         | PK10<br>P10                                                                          | SK06<br>S06                                                                           | UK04<br>U04                                                                           | UK08<br>U08                                                                           |
|--------------------------------------------------------------------------------------------------|----------|-----------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Sizes (w×h) cm                                                                                   |          |                       | 55×70                                                                               | 55×78                                                                               | 55×98                                                                               | 55×118                                                                              | 66×118                                                                              | 78×98                                                                               | 78×118                                                                              | 78×140                                                                              | 94×98                                                                               | 94×140                                                                              | 94×160                                                                               | 114×118                                                                               | 134×98                                                                                | 134×140                                                                               |
|                                                                                                  |          |                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|  Solar DSL    | Standard |                       | 184                                                                                 | 184                                                                                 | 190                                                                                 | 198                                                                                 | 204                                                                                 | 202                                                                                 | 208                                                                                 | 214                                                                                 | 214                                                                                 | 226                                                                                 | 234                                                                                  | 232                                                                                   | 234                                                                                   | 252                                                                                   |
|                                                                                                  | Trend    |                       | -                                                                                   | 196                                                                                 | 202                                                                                 | 212                                                                                 | 218                                                                                 | 214                                                                                 | 222                                                                                 | 230                                                                                 | 228                                                                                 | 244                                                                                 | 252                                                                                  | 250                                                                                   | 254                                                                                   | 274                                                                                   |
|  Electric DML | Standard |                       | 184                                                                                 | 184                                                                                 | 190                                                                                 | 198                                                                                 | 204                                                                                 | 202                                                                                 | 208                                                                                 | 214                                                                                 | 214                                                                                 | 226                                                                                 | 234                                                                                  | 232                                                                                   | 234                                                                                   | 252                                                                                   |
|                                                                                                  | Trend    |                       | -                                                                                   | 196                                                                                 | 202                                                                                 | 212                                                                                 | 218                                                                                 | 214                                                                                 | 222                                                                                 | 230                                                                                 | 228                                                                                 | 244                                                                                 | 252                                                                                  | 250                                                                                   | 254                                                                                   | 274                                                                                   |
|  Manual DKL   | Standard | K sizes, e.g. MK04    | 72                                                                                  | 72                                                                                  | 78                                                                                  | 86                                                                                  | 92                                                                                  | 90                                                                                  | 96                                                                                  | 102                                                                                 | 102                                                                                 | 114                                                                                 | 122                                                                                  | 120                                                                                   | 122                                                                                   | 140                                                                                   |
|                                                                                                  | Trend    | K sizes, e.g. MK04    | -                                                                                   | 84                                                                                  | 90                                                                                  | 100                                                                                 | 106                                                                                 | 102                                                                                 | 110                                                                                 | 118                                                                                 | 116                                                                                 | 132                                                                                 | 140                                                                                  | 138                                                                                   | 142                                                                                   | 162                                                                                   |
|                                                                                                  | Standard | Non K sizes, e.g. M04 | 66                                                                                  | 66                                                                                  | 70                                                                                  | 78                                                                                  | 82                                                                                  | 80                                                                                  | 86                                                                                  | 92                                                                                  | 92                                                                                  | 104                                                                                 | 110                                                                                  | 108                                                                                   | 110                                                                                   | 126                                                                                   |
|                                                                                                  | Trend    | Non K sizes, e.g. M04 | -                                                                                   | 76                                                                                  | 82                                                                                  | 90                                                                                  | 94                                                                                  | 92                                                                                  | 100                                                                                 | 106                                                                                 | 106                                                                                 | 118                                                                                 | 126                                                                                  | 124                                                                                   | 128                                                                                   | 146                                                                                   |

KUX 110 control system is needed if you install an DML onto a manually operated VELUX roof window. To order the blind with white side rails, simply add WL to the end of your product code.


All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](#)

## Colour options

### Standard colours

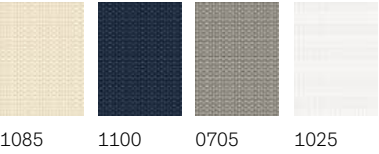

### Trend colours

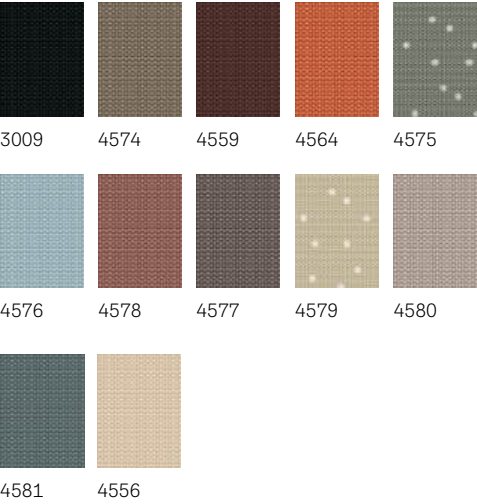

## ✓ Installation – it just clicks

- Click the blind on. Add side rails. That's it. Original VELUX blinds are tailored to your roof window, making installation fast and easy.

## Remotes and Apps

- Easily control your VELUX solar and electric products with our remote controls or apps.

Read more on page 23.

## Certifications

- OEKO-TEX® STANDARD 100 (1076-184) – The original safety standard.
- OEKO-TEX® STeP (22002567) – Responsible production for people and planet.







## Duo blackout roller blind

VELUX Duo blackout roller blind is a blackout roller and a translucent pleated blind in one. It offers the best of both worlds – blackout at night and softly diffused light during the day.

- Two ways to control light in one solution – excellent blackout to darken the room or soften incoming light.
- Choose any colour blackout roller blind combined with a white pleated blind (1016).
- Available with white or brushed aluminium side rails.
- Combine with an exterior Anti-heat blind or shutter for effective heat protection. Read more on page 96.
- Combine with an Insect screen to enjoy fresh air without unwanted visitors. Read more on page 117.


| Most sold window sizes |               |          | CK01<br>C01 | CK02<br>C02 | CK04<br>C04 | CK06<br>C06 | FK06<br>F06 | MK04<br>M04 | MK06<br>M06 | MK08<br>M08 | PK04<br>P04 | PK08<br>P08 | PK10<br>P10 | SK06<br>S06 | UK04<br>U04 | UK08<br>U08 |
|------------------------|---------------|----------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Sizes (w×h) cm         |               |          | 55×70       | 55×78       | 55×98       | 55×118      | 66×118      | 78×98       | 78×118      | 78×140      | 94×98       | 94×140      | 94×160      | 114×118     | 134×98      | 134×140     |
|                        |               |          |             |             |             |             |             |             |             |             |             |             |             |             |             |             |
|                        | Manual<br>DFD | Standard | 94          | 94          | 102         | 112         | 120         | 116         | 124         | 134         | 132         | 150         | 158         | 156         | 160         | 182         |
|                        |               | Trend    | -           | 110         | 118         | 130         | 138         | 134         | 144         | 154         | 152         | 172         | 182         | 178         | 184         | 210         |

All prices in GBP (£)  
To order the blind with white side rails, simply add WL to the end of your product code.


Find all sizes and prices at [velux.co.uk](#)

### Colour options

#### Standard colours

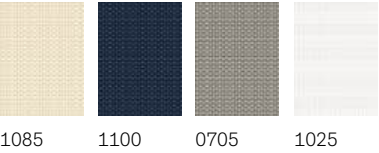

#### Trend colours

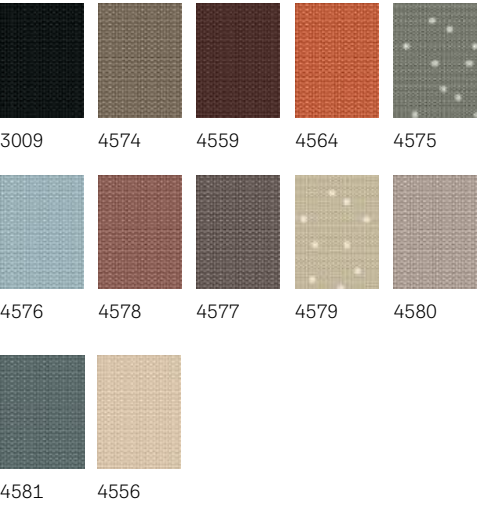


Always combined with white  
Translucent pleated blind (1016)

### ✓ Installation – it just clicks

- Click the blind on. Add side rails. That's it. Original VELUX blinds are tailored to your roof window, making installation fast and easy.

### Certifications

- OEKO-TEX® STANDARD 100 (1076-184) – The original safety standard.
- OEKO-TEX® STeP (22002567) – Responsible production for people and planet.

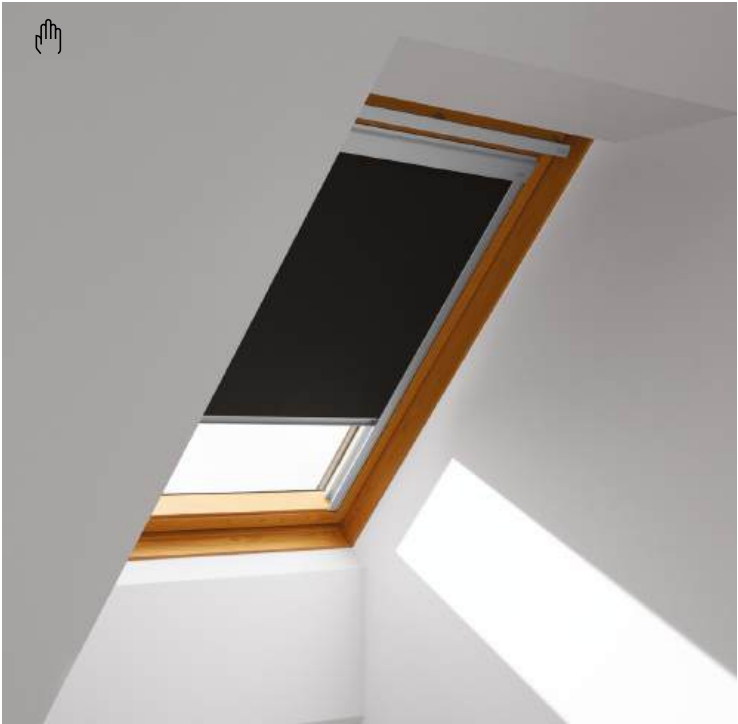

## Basic blackout blind

The VELUX Basic blackout blind is a good alternative for roof windows manufactured before 2014. It is an ideal solution if you simply want to replace your old blind with a cost-effective solution.

- Blackout effect.
- Stepless positioning.
- Only available for VELUX roof windows manufactured before 2014.
- Available in 4 colours and comes with a 2-year guarantee.
- Combine with an exterior Anti-heat blind or shutter for effective heat protection. Read more on page 96.

| Most sold window sizes |           | C02   | C04   | F06    | M04   | M06    | M08    | P08    | S06     | U04    | U08     |
|------------------------|-----------|-------|-------|--------|-------|--------|--------|--------|---------|--------|---------|
| Sizes (w×h) cm         |           | 55×78 | 55×98 | 66×118 | 78×98 | 78×118 | 78×140 | 94×140 | 114×118 | 134×98 | 134×140 |
|                        |           |       |       |        |       |        |        |        |         |        |         |
|                        | Manual    | 48    | 50    | 58     | 56    | 60     | 64     | 72     | 76      | 78     | 88      |
|                        | operation | DBL   |       |        |       |        |        |        |         |        |         |

Only available with brushed aluminium side rails.

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](#)





# Translucent roller blind

VELUX Translucent roller blinds provide privacy whilst still allowing in natural light. Perfect for living rooms, offices and playrooms.

- Softens incoming light and provides privacy.
- Upgrade to a solar or electric blind to enjoy complete light-control at your fingertips.
- Available with white or brushed aluminium side rails.
- Combine your manual blind with a manual Anti-heat blind and save 10%. Read more on page 92.
- Combine with an Insect screen to enjoy fresh air without unwanted visitors. Read more on page 117.

| Most sold window sizes |          | CK01<br>C01 | CK02<br>C02 | CK04<br>C04 | CK06<br>C06 | FK06<br>F06 | MK04<br>M04 | MK06<br>M06 | MK08<br>M08 | PK04<br>P04 | PK08<br>P08 | PK10<br>P10 | SK06<br>S06 | UK04<br>U04 | UK08<br>U08 |
|------------------------|----------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Sizes (w×h) cm         |          | 55×70       | 55×78       | 55×98       | 55×118      | 66×118      | 78×98       | 78×118      | 78×140      | 94×98       | 94×140      | 94×160      | 114×118     | 134×98      | 134×140     |
|                        |          |             |             |             |             |             |             |             |             |             |             |             |             |             |             |
|                        | Standard | 184         | 184         | 190         | 198         | 204         | 202         | 208         | 214         | 214         | 226         | 234         | 232         | 234         | 252         |
|                        | Trend    | -           | 196         | 202         | 212         | 218         | 214         | 222         | 230         | 228         | 244         | 252         | 250         | 254         | 274         |
|                        | Standard | 184         | 184         | 190         | 198         | 204         | 202         | 208         | 214         | 214         | 226         | 234         | 232         | 234         | 252         |
|                        | Trend    | -           | 196         | 202         | 212         | 218         | 214         | 222         | 230         | 228         | 244         | 252         | 250         | 254         | 274         |
|                        | Standard | 72          | 72          | 78          | 86          | 92          | 90          | 96          | 102         | 102         | 114         | 122         | 120         | 122         | 140         |
|                        | Trend    | -           | 84          | 90          | 100         | 106         | 102         | 110         | 118         | 116         | 132         | 140         | 138         | 142         | 162         |

KUX 110 control system is needed if you install an RML onto a manually operated VELUX roof window. To order the blind with white side rails, simply add WL to the end of your product code.

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://www.velux.co.uk)

## Colour options

**Standard colours**

1086

9050

4161

1028

**Trend colours**

4163

4162

4069

4164

4165

4166

4168

4167

4171

4169

4170

4155

## ✓ Installation – it just clicks

- Click the blind on. Add side rails. That's it. Original VELUX blinds are tailored to your roof window, making installation fast and easy.

## Remotes and Apps

Easily control your VELUX solar and electric products with our remote controls or apps.

Read more on page 23.

## Certifications

- OEKO-TEX® STANDARD 100 (1076-184) – The original safety standard.
- OEKO-TEX® STeP (22002567) – Responsible production for people and planet.








## Blackout energy pleated blind

VELUX Blackout energy pleated blinds provide both blackout and insulation, perfect for bedrooms that need blackout at night and extra insulation. Adjust the blind from the top or the bottom\* to let in exactly the right amount of light.

- When installed, the blind can reduce window heat loss by up to 21%\*\* for increased comfort
- Blackout for a great night's sleep or a nap during the day.
- Insulation for increased comfort during colder months.
- A flying blind design that can be placed anywhere on the roof window.\*
- Upgrade to a solar or electric blind to enjoy complete light-control at your fingertips.
- Available with white or brushed aluminium side rails.
- Combine your manual blind with a manual Anti-heat blind and save 10%. Read more on page 92.
- Combine with an Insect screen to enjoy fresh air without unwanted visitors. Read more on page 117.

### Colour options

#### Standard colours

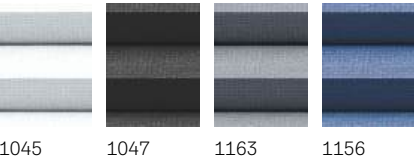

#### Trend colours



### ✓ Installation – it just clicks

- Click the blind on. Add side rails. That's it. Original VELUX blinds are tailored to your roof window, making installation fast and easy.

### Remotes and Apps

- Easily control your VELUX solar and electric products with our remote controls or apps.

Read more on page 23.

### Certifications

- OEKO-TEX® STANDARD 100 (1076-184) – The original safety standard.
- OEKO-TEX® STeP (22002567) – Responsible production for people and planet.

| Most sold window sizes                                                                |              |          | CK01 C01                                                                              | CK02 C02                                                                              | CK04 C04                                                                              | CK06 C06                                                                              | FK06 F06                                                                              | MK04 M04                                                                              | MK06 M06                                                                              | MK08 M08                                                                              | PK04 P04                                                                              | PK08 P08                                                                              | PK10 P10                                                                              | SK06 S06                                                                              | UK04 U04                                                                              | UK08 U08                                                                              |
|---------------------------------------------------------------------------------------|--------------|----------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Sizes (w×h) cm                                                                        |              |          | 55×70                                                                                 | 55×78                                                                                 | 55×98                                                                                 | 55×118                                                                                | 66×118                                                                                | 78×98                                                                                 | 78×118                                                                                | 78×140                                                                                | 94×98                                                                                 | 94×140                                                                                | 94×160                                                                                | 114×118                                                                               | 134×98                                                                                | 134×140                                                                               |
|                                                                                       |              |          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|  | Solar FSC    | Standard | 206                                                                                   | 206                                                                                   | 214                                                                                   | 224                                                                                   | 232                                                                                   | 228                                                                                   | 236                                                                                   | 246                                                                                   | 244                                                                                   | 262                                                                                   | 270                                                                                   | 268                                                                                   | 272                                                                                   | 294                                                                                   |
|                                                                                       |              | Trend    | -                                                                                     | 222                                                                                   | 230                                                                                   | 242                                                                                   | 250                                                                                   | 246                                                                                   | 256                                                                                   | 266                                                                                   | 264                                                                                   | 284                                                                                   | 294                                                                                   | 290                                                                                   | 296                                                                                   | 322                                                                                   |
|  | Electric FMC | Standard | 206                                                                                   | 206                                                                                   | 214                                                                                   | 224                                                                                   | 232                                                                                   | 228                                                                                   | 236                                                                                   | 246                                                                                   | 244                                                                                   | 262                                                                                   | 270                                                                                   | 268                                                                                   | 272                                                                                   | 294                                                                                   |
|                                                                                       |              | Trend    | -                                                                                     | 222                                                                                   | 230                                                                                   | 242                                                                                   | 250                                                                                   | 246                                                                                   | 256                                                                                   | 266                                                                                   | 264                                                                                   | 284                                                                                   | 294                                                                                   | 290                                                                                   | 296                                                                                   | 322                                                                                   |
|  | Manual FHC   | Standard | 94                                                                                    | 94                                                                                    | 102                                                                                   | 112                                                                                   | 120                                                                                   | 116                                                                                   | 124                                                                                   | 134                                                                                   | 132                                                                                   | 150                                                                                   | 158                                                                                   | 156                                                                                   | 160                                                                                   | 182                                                                                   |
|                                                                                       |              | Trend    | -                                                                                     | 110                                                                                   | 118                                                                                   | 130                                                                                   | 138                                                                                   | 134                                                                                   | 144                                                                                   | 154                                                                                   | 152                                                                                   | 172                                                                                   | 182                                                                                   | 178                                                                                   | 184                                                                                   | 210                                                                                   |

KUX 110 control system is needed if you install an FMC onto a manually operated VELUX roof window. To order the blind with white side rails, simply add WL to the end of your product code.

\* Manual version only.

\*\* The thermal insulation percentage is based on the blind installed in a triple-glazed roof window (IGU66SG).

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://www.velux.co.uk)





# Translucent pleated blind

The VELUX Translucent pleated blind is a decorative solution that provides privacy whilst diffusing soft natural light into your room. Adjust the blind from the top or the bottom\* to let in exactly the right amount of light.

- Softens incoming light and provides privacy.
- A flying blind design that can be placed anywhere on the roof window.\*
- Upgrade to a solar or electric blind to enjoy complete light-control at your fingertips.
- Available with white or brushed aluminium side rails.
- Combine with an exterior Anti-heat blind or shutter for effective heat protection. Read more on page 96.
- Combine with an Insect screen to enjoy fresh air without unwanted visitors. Read more on page 117.


| Most sold window sizes |          | CK01<br>C01 | CK02<br>C02 | CK04<br>C04 | CK06<br>C06 | FK06<br>F06 | MK04<br>M04 | MK06<br>M06 | MK08<br>M08 | PK04<br>P04 | PK08<br>P08 | PK10<br>P10 | SK06<br>S06 | UK04<br>U04 | UK08<br>U08 |
|------------------------|----------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Sizes (w×h) cm         |          | 55×70       | 55×78       | 55×98       | 55×118      | 66×118      | 78×98       | 78×118      | 78×140      | 94×98       | 94×140      | 94×160      | 114×118     | 134×98      | 134×140     |
|                        |          |             |             |             |             |             |             |             |             |             |             |             |             |             |             |
|                        | Standard | 196         | 196         | 202         | 212         | 218         | 214         | 222         | 230         | 228         | 244         | 252         | 250         | 254         | 274         |
|                        | Trend    | -           | 208         | 216         | 226         | 234         | 230         | 240         | 248         | 246         | 264         | 274         | 270         | 274         | 298         |
|                        | Standard | 196         | 196         | 202         | 212         | 218         | 214         | 222         | 230         | 228         | 244         | 252         | 250         | 254         | 274         |
|                        | Trend    | -           | 208         | 216         | 226         | 234         | 230         | 240         | 248         | 246         | 264         | 274         | 270         | 274         | 298         |
|                        | Standard | 84          | 84          | 90          | 100         | 106         | 102         | 110         | 118         | 116         | 132         | 140         | 138         | 142         | 162         |
|                        | Trend    | -           | 96          | 104         | 114         | 122         | 118         | 128         | 136         | 134         | 152         | 162         | 158         | 162         | 186         |

KUX 110 control system is needed if you install an FML onto a manually operated VELUX roof window.  
To order the blind with white side rails, simply add WL to the end of your product code.  
\* Manual version only.

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://www.velux.co.uk)

## Colour options

### Standard colours

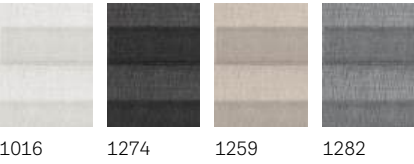

### Trend colours



## ✓ Installation – it just clicks

- Click the blind on. Add side rails. That's it. Original VELUX blinds are tailored to your roof window, making installation fast and easy.

## Remotes and Apps

- Easily control your VELUX solar and electric products with our remote controls or apps.


Read more on page 23.

## Certifications

- OEKO-TEX® STANDARD 100 (1076-184) – The original safety standard.
- OEKO-TEX® STeP (22002567) – Responsible production for people and planet.






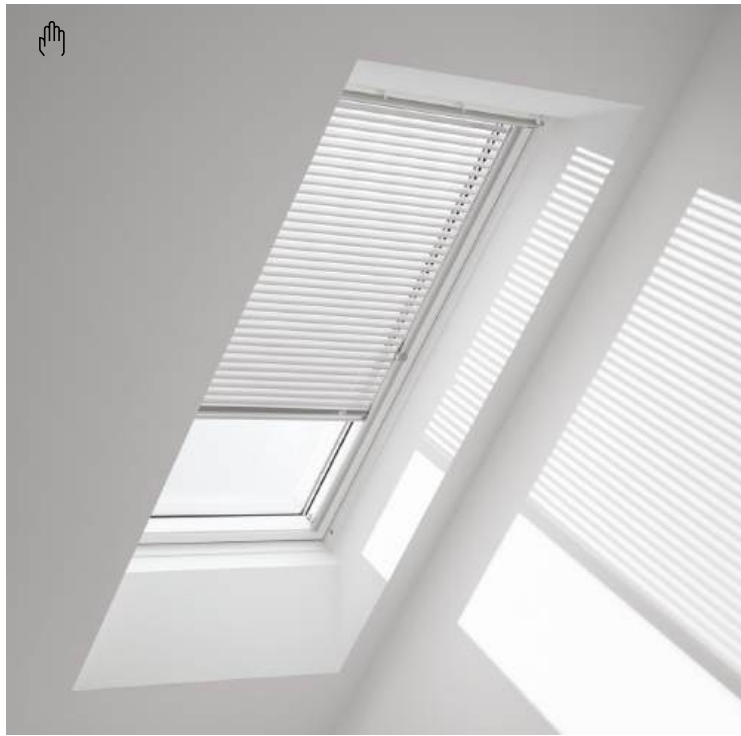

Colour options


Standard colours

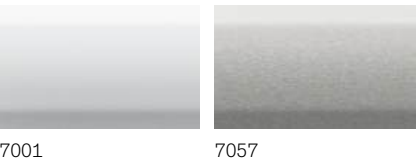

✓ Installation – it just clicks

- Click the blind on. Add side rails. That's it. Original VELUX blinds are tailored to your roof window, making installation fast and easy.

Details




Venetian blind

This classic solution for light dimming and privacy is perfect for bathrooms and kitchens. It is moisture-resistant and easy to clean.

- Preserves your view while providing privacy.
- Cordless operation.
- Available with white or brushed aluminium side rails.
- Combine with an exterior Anti-heat blind or shutter for effective heat protection. Read more on page 96.
- Combine with an Insect screen to enjoy fresh air without unwanted visitors. Read more on page 117.

| Most sold window sizes |            |          | CK01 C01 | CK02 C02 | CK04 C04 | CK06 C06 | FK06 F06 | MK04 M04 | MK06 M06 | MK08 M08 | PK04 P04 | PK08 P08 | PK10 P10 | SK06 S06 | UK04 U04 | UK08 U08 |
|------------------------|------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Sizes (w×h) cm         |            |          | 55×70    | 55×78    | 55×98    | 55×118   | 66×118   | 78×98    | 78×118   | 78×140   | 94×98    | 94×140   | 94×160   | 114×118  | 134×98   | 134×140  |
|                        |            |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |
|                        | Manual PAL | Standard | 94       | 94       | 102      | 112      | 120      | 116      | 124      | 134      | 132      | 150      | 158      | 156      | 160      | 182      |


To order the blind with white side rails, simply add WL to the end of your product code. All prices in GBP (£) Find all sizes and prices at velux.co.uk

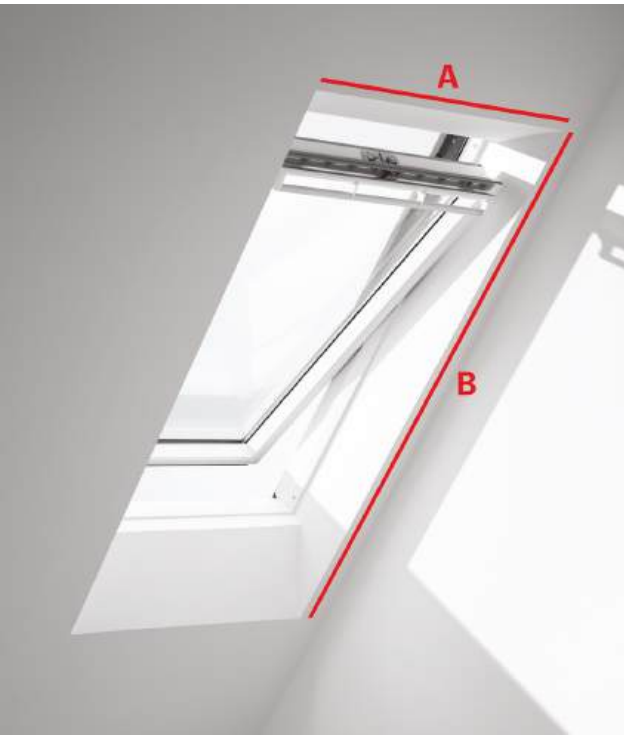

Insect screen

Enjoy fresh air without unwanted visitors with a VELUX Insect screen. The screen is simple to operate and can be combined with any other VELUX interior or exterior blind. It has transparent net fabric and stows neatly away in the slim top casing when not in use.

- 100% insect-proof material.
- Transparent net fabric does not obstruct your view.
- Durable, wind-resistant fabric for long-lasting performance.
- OEKO-TEX® STANDARD 100 (1076-184) – The original safety standard.
- OEKO-TEX® STeP (22002567) – Responsible production for people and planet.
- The screen can be combined with any other VELUX interior or exterior blind.



Determine the correct size

- Measure the inner wall width (A) and height (B) to find the size code and price of your insect screen in the table below.
- If you have two heights (B) or heights above 2400mm – two insect screens and one connector set ZOZ 157 SWL are needed.
- IMPORTANT:** Insect screen size codes may differ from window size code, please measure (A) and (B) and find correct size code in the table below before ordering.

Installation

- Quick and easy installation.

</

All prices in GBP (£) Find all sizes and prices at velux.co.uk





# Flat roof windows

|                                                             |          |
|-------------------------------------------------------------|----------|
| Curved glass rooflight                                      | Page 122 |
| Flat glass rooflight                                        | Page 124 |
| Special function glass rooflight                            | Page 126 |
| Blinds for curved and flat glass rooflights                 | Page 128 |
| Standard glass rooflight                                    | Page 130 |
| Dome with glazing                                           | Page 132 |
| Special function dome with glazing                          | Page 134 |
| Blinds for standard glass rooflights and domes with glazing | Page 136 |
| Vario by VELUX bespoke rooflights                           | Page 138 |



# The full range of flat roof windows

We offer a complete range of flat roof windows to cover all projects and budgets. From innovative curved and flat glass rooflights to traditional domes, the VELUX flat roof window portfolio is broad and has something for everyone.



Curved glass rooflight

Top performer with CurveTech

- Maximum daylight area
- Excellent energy performance
- State-of-the art design
- Excellent sound reduction
- Clear view and drainage with CurveTech

(Price example 100 x 100cm)  
**£1,466**

See more page 122 →



Flat glass rooflight

Daylight, design and aesthetics

- Maximum daylight area
- Excellent energy performance
- State-of-the art design
- Excellent sound reduction

(Price example 100 x 100cm)  
**£1,228**

See more page 124 →



Standard glass rooflight

Essential performance. Reliable design

- Good daylight area
- Reliable energy performance
- Modern glass design with attention to detail
- Good sound insulation

(Price example 100 x 100cm)  
**£1,037**

See more page 130 →



Dome with glazing

Advanced dome solution

- Good daylight area
- Good energy performance
- Classic design
- Good sound reduction

(Price example 100 x 100cm)  
**£907**

See more page 132 →


### Bespoke solution

- If you are looking for a bespoke solution, check out Vario by VELUX on page 138.

|                                         |                                                                                                                                                                                                                               |                                                                                                                                                                                                                               |                                                                                                                                                                                                                                         |                                                                                                                                                                                                           |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Specifications for flat roof windows    | Curved glass rooflight                                                                                                                                                                                                                                                                                           | Flat glass rooflight                                                                                                                                                                                                                                                                                             | Standard glass rooflight                                                                                                                                                                                                                                                                                                   | Dome with glazing                                                                                                                                                                                                                                                                            |
| Application areas                       | Habitable rooms                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                              |
| Roof pitch                              | 0 - 15°                                                                                                                                                                                                                                                                                                          | 2 - 15°                                                                                                                                                                                                                                                                                                          | 2 - 15°                                                                                                                                                                                                                                                                                                                    | 0 - 15°                                                                                                                                                                                                                                                                                      |
| Design                                  | <ul style="list-style-type: none"><li>Curved glass top</li><li>88% daylight area*</li><li>Glass-to-edge inside view</li><li>Glass-to-edge curved top</li><li>Integrated motor in frame</li><li>Discreetly placed blinds</li><li>Better view and drainage with CurveTech</li></ul>                                | <ul style="list-style-type: none"><li>Flat glass top</li><li>88% daylight area*</li><li>Glass-to-edge inside view</li><li>Glass-to-edge flat top</li><li>Integrated motor in frame</li><li>Discreetly placed blinds</li></ul>                                                                                    | <ul style="list-style-type: none"><li>Standard glass top</li><li>70% daylight area*</li><li>Perfectly fitting blinds</li><li>Integrated motor in frame</li></ul>                                                                                                                                                           | <ul style="list-style-type: none"><li>Clear or opaque dome skin</li><li>70% daylight area*</li></ul>                                                                                                                                                                                         |
| Performance                             | <ul style="list-style-type: none"><li>Glass top and base unit with double- or triple glazing</li><li>Insulating glass unit with inner laminated glass (P4A)</li><li>Urc,ref300: 0,65 W/(m²K)**</li><li>Arc,ref300: 4.4 m²**</li><li>Sound insulation 39 db**</li><li>Burglary resistant as standard***</li></ul> | <ul style="list-style-type: none"><li>Glass top and base unit with double- or triple glazing</li><li>Insulating glass unit with inner laminated glass (P4A)</li><li>Urc,ref300: 0,75 W/(m²K)**</li><li>Arc,ref300: 4.1 m²**</li><li>Sound insulation 39 db**</li><li>Burglary resistant as standard***</li></ul> | <ul style="list-style-type: none"><li>Standard glass top with aluminium frame and base unit with double glazing</li><li>Insulating glass unit with inner laminated glass (P4A)</li><li>U-value: 0,75 W/(m²K)**</li><li>Area: 3.9 m²**</li><li>Sound insulation 36 db**</li><li>Burglary resistant as standard***</li></ul> | <ul style="list-style-type: none"><li>Dome skin and base unit with double glazing</li><li>Insulating glass unit with inner laminated glass (P4A)</li><li>U-value: 0,80 W/(m²K)**</li><li>Area: 3.4 m²**</li><li>Sound insulation 36 db**</li><li>Burglary resistant as standard***</li></ul> |
| Operation                               | <ul style="list-style-type: none"><li>Solar</li><li>Electric</li><li>Fixed</li></ul>                                                                                                                                                                                                                             | <ul style="list-style-type: none"><li>Solar</li><li>Electric</li><li>Fixed</li></ul>                                                                                                                                                                                                                             | <ul style="list-style-type: none"><li>Electric</li><li>Fixed</li></ul>                                                                                                                                                                                                                                                     | <ul style="list-style-type: none"><li>Electric</li><li>Fixed</li></ul>                                                                                                                                                                                                                       |
| Smart home and sensors                  | <ul style="list-style-type: none"><li>Compatible with remotes and apps</li><li>Pre-installed rain sensor as standard</li><li>Pre-paired wall switch</li></ul>                                                                                                                                                    | <ul style="list-style-type: none"><li>Compatible with remotes and apps</li><li>Pre-installed rain sensor as standard</li><li>Pre-paired wall switch</li></ul>                                                                                                                                                    | <ul style="list-style-type: none"><li>Compatible with remotes and apps</li><li>Pre-installed rain sensor as standard</li><li>Pre-paired wall switch</li></ul>                                                                                                                                                              | <ul style="list-style-type: none"><li>Compatible with remotes and apps</li><li>Pre-installed rain sensor as standard</li><li>Pre-paired wall switch</li></ul>                                                                                                                                |
| Heat protection and daylight adjustment | <ul style="list-style-type: none"><li>Anti-heat blind (solar) – Optimised and discreet placement</li><li>Blackout blind (solar) – Optimised and discreet placement</li><li>Insect screen (manual, cleanable, removable)</li></ul>                                                                                | <ul style="list-style-type: none"><li>Anti-heat blind (solar) – Optimised and discreet placement</li><li>Blackout blind (solar) – Optimised and discreet placement</li><li>Insect screen (manual, cleanable, removable)</li></ul>                                                                                | <ul style="list-style-type: none"><li>Anti-heat blind (solar)</li><li>Translucent and blackout blinds (solar/electric)</li></ul>                                                                                                                                                                                           | <ul style="list-style-type: none"><li>Anti-heat blind (solar)</li><li>Blackout energy pleated blind (solar/electric)</li></ul>                                                                                                                                                               |

\* Daylight area stated as per method in EAD 220062-00-0401 (CE marking). Numbers mentioned are for a size 100100.  
\*\* U-value, area and sound insulation is stated for fixed variants with either Q variant 2-layer glazing unit (standard glass and dome with glazing) and 2-layer glazing unit (flat glass and curved glass). U-values and areas are calculated for roof window size 1.2x1.2m, with a kerb height of 300mm, in accordance with method in EN 1873:2014+A1:2016.  
\*\*\* Complies with EU legislative requirements for burglary resistance, class 2.



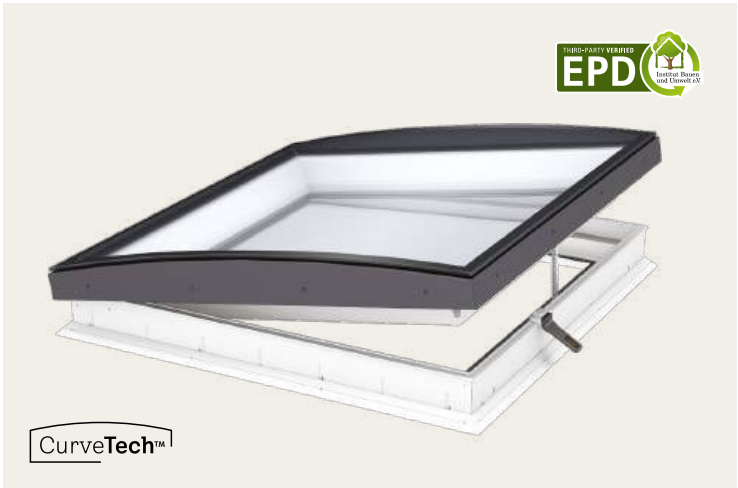


# Curved glass rooflight

Solar, electric or fixed variants available

The VELUX glass rooflight with curved glass is a revolution in roof window design. The unique design with a slim frame and invisible sash provides maximum daylight and a beautiful glass-to-edge view from inside the home – even with a blind installed. In addition, the curved-shaped glass top allows rainwater to easily drain off the surface – even on 0° roof pitches.

- Maximum daylight area.
- Excellent energy performance.
- State-of-the-art design.
- Excellent sound reduction.
- Clear view and drainage.

## Roof pitch



## Details


- The premium choice for homeowners with 0-15° roof pitches.
- Glass-to-edge curved glass top unit.
- Unique roof window construction with a slim frame and invisible sash.
- Available with double or triple glazing for excellent energy performance and sound reduction.
- Laminated insulated glass unit for safety.
- Burglary resistant.\*
- Comes in solar, electric and fixed variants.
- Solar and electric variants deliver fresh air at the touch of a button and have an integrated rain sensor.

\* Complies with EU legislative requirements for burglary resistance, class 2.

## Blind options

- The blinds are discreetly placed in the base unit construction, between the lower pane and outer glass, and do not compromise daylight, design or your view to the sky.

See more about blinds options on page 128.

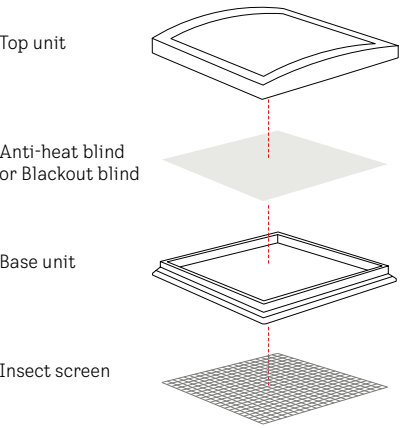

Mounting of blinds is done most conveniently during the rooflight installation process.

## Remotes and Apps

Easily control your VELUX solar and electric products with our remote controls or apps.

Free App Control included. Read more at [velux.co.uk/freeapp](https://velux.co.uk/freeapp)

## Motor placement

- On all rectangular sizes, the motor is placed on the long side. Please refer to the installation instructions for further details.



| Available sizes              | 060060 | 090060 | 080080  | 090090  | 100100  | 120090  | 120120  | 150080  | 150100  | 150120  | 150150  | 200060 | 200100  |
|------------------------------|--------|--------|---------|---------|---------|---------|---------|---------|---------|---------|---------|--------|---------|
| Hole in roof (wxh) cm        | 60×60  | 90×60  | 80×80   | 90×90   | 100×100 | 120×90  | 120×120 | 150×80  | 150×100 | 150×120 | 150×150 | 200×60 | 200×100 |
| External frame size (wxh) cm | 82×82  | 112×82 | 102×102 | 112×112 | 122×122 | 142×112 | 142×142 | 172×102 | 172×122 | 172×142 | 172×172 | 222×82 | 222×122 |

| h | w | Window opening* | U <sub>w</sub> -VALUE**                             |  |  |  |  |  |  |  |  |  |  |  |
|---|---|-----------------|-----------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|
|   |   |                 | U <sub>rc,ref</sub> 300 W/(m²K)/ Arc,ref300 Area m² |  |  |  |  |  |  |  |  |  |  |  |

| Top unit |                       |     |     |     |     |     |     |       |       |       |       |       |       |       |
|----------|-----------------------|-----|-----|-----|-----|-----|-----|-------|-------|-------|-------|-------|-------|-------|
| ISU 1093 | Curved glass top unit | 576 | 635 | 686 | 762 | 847 | 880 | 1,100 | 1,024 | 1,117 | 1,312 | 1,524 | 1,160 | 1,600 |

| Base unit |                                     |           |       |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------|-------------------------------------|-----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| CVU 0320Q | Solar base unit, 2-layer glazing    | 0.65/ 4.4 | 1,095 | 1,138 | 1,175 | 1,231 | 1,293 | 1,318 | 1,429 | 1,355 | 1,448 | 1,547 | 1,702 | 1,448 | 1,980 |
| CVU 0325Q | Solar base unit, 3-layer glazing    | 0.55/ 4.4 | 1,221 | 1,278 | 1,326 | 1,398 | 1,479 | 1,511 | 1,656 | 1,559 | 1,680 | 1,809 | 2,010 | 1,680 | 2,147 |
| CVU 0220Q | Electric base unit, 2-layer glazing | 0.65/ 4.4 | 1,095 | 1,138 | 1,175 | 1,231 | 1,293 | 1,318 | 1,429 | 1,355 | 1,448 | 1,912 | 2,021 | 1,448 | 1,836 |
| CVU 0225Q | Electric base unit, 3-layer glazing | 0.55/ 4.4 | 1,221 | 1,278 | 1,326 | 1,398 | 1,479 | 1,511 | 1,656 | 1,559 | 1,680 | 1,809 | 2,010 | 1,680 | 2,147 |
| CFU 0020Q | Fixed base unit, 2-layer glazing    | 0.65/ 4.4 | 421   | 464   | 501   | 557   | 619   | 644   | 755   | 681   | 774   | 1,446 | 1,554 | 1,290 | 1,369 |
| CFU 0025Q | Fixed base unit, 3-layer glazing    | 0.55/ 4.4 | 547   | 604   | 652   | 724   | 805   | 837   | 982   | 885   | 1,006 | 1,704 | 1,912 | 1,536 | 1,473 |

| Installation accessories |                                   |     |     |     |     |     |     |     |     |     |     |     |     |     |
|--------------------------|-----------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| ZCU 0015                 | Extension kerb with flange 160mm  | 333 | 352 | 355 | 371 | 382 | 386 | 436 | 401 | 455 | 478 | 562 | 459 | 547 |
| ZZZ 210U                 | Securing kit for roofing material | 55  | 58  | 58  | 61  | 63  | 63  | 72  | 66  | 75  | 78  | 92  | 75  | 90  |
| LSF 2000                 | Lining*                           | 328 | 352 | 360 | 375 | 391 | 399 | 422 | 403 | 438 | 438 | 469 | 450 | 489 |

| Recommended blinds and shutters |                       |     |     |     |     |     |     |     |     |     |     |     |     |     |
|---------------------------------|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| MSU 5070                        | Solar Anti-heat blind | 368 | 376 | 384 | 392 | 400 | 420 | 436 | 412 | 440 | 456 | 500 | 448 | 523 |

\* Lining for flat roof. This all-in-one solution includes PVC panels, vapour barrier and facings.  
\*\* Calculated for a reference size of 1.2x1.2m and 300mm upstand, in a 0° roof pitch.

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://velux.co.uk)





# Flat glass rooflight

Solar, electric or fixed variants available

The VELUX Flat glass rooflight will bring the magic of daylight into your home. The unique design with a slim frame and invisible sash provides maximum daylight and a beautiful design from inside the home – even with a blind installed.

- Maximum daylight area.
- Excellent energy performance.
- State-of-the-art design.
- Excellent sound reduction.

## Roof pitch



## Details


- The elegant choice for roof pitches from 2-15°.
- Glass-to-edge flat glass top unit.
- Unique roof window construction with a slim frame and invisible sash.
- Available with double or triple glazing for excellent energy performance and sound reduction.
- Laminated insulated glass unit for safety.
- Burglary resistant.\*
- Comes in solar, electric and fixed variants.
- Solar and electric variants deliver fresh air at the touch of a button and have an integrated rain sensor.

\* Complies with EU legislative requirements for burglary resistance, class 2.

## Blind options

- The blinds are discreetly placed in the base unit construction, between the lower pane and outer glass, and do not compromise daylight, design or your view to the sky.

See more about blinds options on page 128.

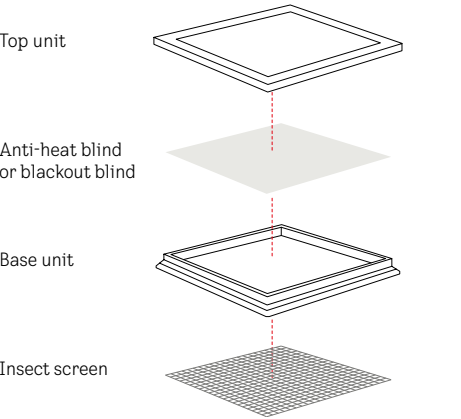

Mounting of blinds is done most conveniently during the rooflight installation process.

## Remotes and Apps

- Easily control your VELUX solar and electric products with our remote controls or apps.
- Free App Control included. Read more at [velux.co.uk/freeapp](http://velux.co.uk/freeapp)

## Motor placement

On all rectangular sizes, the motor is placed on the long side. Please refer to the installation instructions for further details.



| Available sizes              | 060060 | 090060 | 080080  | 090090  | 100100  | 120090  | 120120  | 150080  | 150100  | 150120  | 150150  | 200060 | 200100  |
|------------------------------|--------|--------|---------|---------|---------|---------|---------|---------|---------|---------|---------|--------|---------|
| Hole in roof (wxh) cm        | 60×60  | 90×60  | 80×80   | 90×90   | 100×100 | 120×90  | 120×120 | 150×80  | 150×100 | 150×120 | 150×150 | 200×60 | 200×100 |
| External frame size (wxh) cm | 82×82  | 112×82 | 102×102 | 112×112 | 122×122 | 142×112 | 142×142 | 172×102 | 172×122 | 172×142 | 172×172 | 222×82 | 222×122 |

| h               | w | U <sub>w</sub> -VALUE**                                     |  |  |  |  |  |  |  |  |  |  |  |  |
|-----------------|---|-------------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|--|
| Window opening* |   | U <sub>w</sub> ,ref300<br>W/(m²K)/<br>Arc,ref300<br>Area m² |  |  |  |  |  |  |  |  |  |  |  |  |

| Top unit |                     |     |     |     |     |     |     |     |     |     |     |       |     |       |
|----------|---------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-------|-----|-------|
| ISU 2093 | Flat glass top unit | 414 | 457 | 493 | 548 | 609 | 633 | 792 | 737 | 804 | 944 | 1,096 | 834 | 1,151 |

| Base unit |                                     |          |       |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------|-------------------------------------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| CVU 0320Q | Solar base unit, 2-layer glazing    | 0.75/4.1 | 1,095 | 1,138 | 1,175 | 1,231 | 1,293 | 1,318 | 1,429 | 1,355 | 1,448 | 1,547 | 1,702 | 1,448 | 1,980 |
| CVU 0325Q | Solar base unit, 3-layer glazing    | 0.60/4.1 | 1,221 | 1,278 | 1,326 | 1,398 | 1,479 | 1,511 | 1,656 | 1,559 | 1,680 | 1,809 | 2,010 | 1,680 | 2,147 |
| CVU 0220Q | Electric base unit, 2-layer glazing | 0.75/4.1 | 1,095 | 1,138 | 1,175 | 1,231 | 1,293 | 1,318 | 1,429 | 1,355 | 1,448 | 1,912 | 2,021 | 1,448 | 1,836 |
| CVU 0225Q | Electric base unit, 3-layer glazing | 0.60/4.1 | 1,221 | 1,278 | 1,326 | 1,398 | 1,479 | 1,511 | 1,656 | 1,559 | 1,680 | 1,809 | 2,010 | 1,680 | 2,147 |
| CFU 0020Q | Fixed base unit, 2-layer glazing    | 0.75/4.1 | 421   | 464   | 501   | 557   | 619   | 644   | 755   | 681   | 774   | 1,446 | 1,554 | 1,290 | 1,369 |
| CFU 0025Q | Fixed base unit, 3-layer glazing    | 0.60/4.1 | 547   | 604   | 652   | 724   | 805   | 837   | 982   | 885   | 1,006 | 1,704 | 1,912 | 1,536 | 1,473 |

| Installation accessories |                                   |     |     |     |     |     |     |     |     |     |     |     |     |     |
|--------------------------|-----------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| ZCU 0015                 | Extension kerb with flange 160mm  | 333 | 352 | 355 | 371 | 382 | 386 | 436 | 401 | 455 | 478 | 562 | 459 | 547 |
| ZZZ 210U                 | Securing kit for roofing material | 55  | 58  | 58  | 61  | 63  | 63  | 72  | 66  | 75  | 78  | 92  | 75  | 90  |
| LSF 2000                 | Lining*                           | 328 | 352 | 360 | 375 | 391 | 399 | 422 | 403 | 438 | 438 | 469 | 450 | 489 |

| Recommended blinds and shutters |                       |     |     |     |     |     |     |     |     |     |     |     |     |     |
|---------------------------------|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| MSU 5070                        | Solar Anti-heat blind | 368 | 376 | 384 | 392 | 400 | 420 | 436 | 412 | 440 | 456 | 500 | 448 | 523 |

\* Lining for flat roof. This all-in-one solution includes PVC panels, vapour barrier and facings.  
\*\* Calculated for a reference size of 1.2x1.2m and 300mm upstand, in a 0° roof pitch.

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](http://velux.co.uk)






# Glass rooflight electric roof exit

Curved or flat glass variant available

The VELUX Glass rooflight electric exit offers safe and easy roof access for maintenance, plus daily comfort ventilation. Each unit includes a mandatory safety and ventilation switch kit to prevent entrapment and fall-through.


- Easy access via indoor switch and key.
- Secure exit with outdoor locking function.
- Comfort ventilation for daily airing.
- Compatible with VELUX Control unit KES 305 (not included).

## Roof pitch




## Details

- Note: this product is compatible with VELUX glass rooflight blinds MSU and DSU.



Curved glass




Flat glass

## Blind options

- The blinds are discreetly placed in the base-unit construction, between the lower pane and outer glass, and do not compromise daylight, design or your views to the sky.

See more about blinds options on page 128.

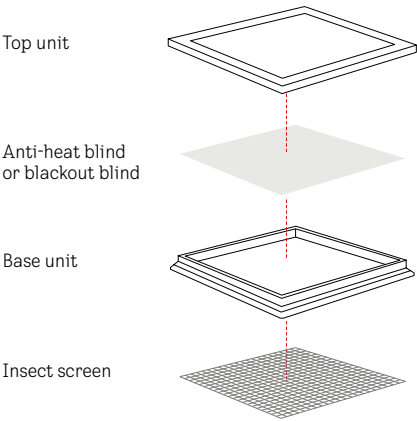

Mounting of blinds is done most conveniently during the rooflight installation process.

## Curved glass rooflight electric exit

|                                                                                                        |                       |                       |                                                                                                                                                                                                                                                             |
|--------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Available sizes                                                                                        | 100100120120150100    |                       |                                                                                                                                                                                                                                                             |
| Hole in roof (wxh) cm                                                                                  | 100×100120×120150×100 |                       |                                                                                                                                                                                                                                                             |
| <br>Window opening* | U-VALUE**             |                       |    |
|                                                                                                        | Urc,ref300<br>W/(m²K) | Arc,ref300<br>Area m² |                                                                                                                                                                                                                                                             |

### Top unit

|          |                       |     |       |       |
|----------|-----------------------|-----|-------|-------|
| ISU 1093 | Curved glass top unit | 847 | 1,100 | 1,117 |
|----------|-----------------------|-----|-------|-------|

### Base unit and exit safety and comfort ventilation kit

|                                                                                     |             |                                                                                |      |      |       |       |       |
|-------------------------------------------------------------------------------------|-------------|--------------------------------------------------------------------------------|------|------|-------|-------|-------|
|  | CXU 0220K01 | Electric base unit, 2 layer glazing. Exit safety kit with rain sensor included | 0.75 | 4.41 | 3,244 | 3,856 | 3,940 |
|                                                                                     | CXU 0225K01 | Electric base unit, 3 layer glazing. Exit safety kit with rain sensor included | 0.65 | 4.41 | 4,079 | 4,876 | 4,984 |

### Control unit

|         |                                                                               |     |     |     |
|---------|-------------------------------------------------------------------------------|-----|-----|-----|
| KES 305 | Control unit for glass rooflight exit 5A, for the control of 1 rooflight exit | 207 | 207 | 207 |
|---------|-------------------------------------------------------------------------------|-----|-----|-----|

### Installation accessories

|          |                               |     |     |     |
|----------|-------------------------------|-----|-----|-----|
| ZCU 0015 | Extension kerb 160mm flange   | 382 | 436 | 455 |
| ZZZ 210U | Securing kit for roofing felt | 63  | 72  | 75  |
| LSF 2000 | Lining***                     | 391 | 422 | 438 |

## Flat glass rooflight electric exit

|                                                                                                          |                       |                       |                                                                                                                                                                                                                                                                   |
|----------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Available sizes                                                                                          | 100100120120150100    |                       |                                                                                                                                                                                                                                                                   |
| Hole in roof (wxh) cm                                                                                    | 100×100120×120150×100 |                       |                                                                                                                                                                                                                                                                   |
| <br>Window opening* | U-VALUE**             |                       |    |
|                                                                                                          | Urc,ref300<br>W/(m²K) | Arc,ref300<br>Area m² |                                                                                                                                                                                                                                                                   |

### Top unit

|          |                     |     |     |     |
|----------|---------------------|-----|-----|-----|
| ISU 2093 | Flat glass top unit | 609 | 792 | 804 |
|----------|---------------------|-----|-----|-----|

### Base unit and exit safety and comfort ventilation kit

|                                                                                       |             |                                                                                |      |      |       |       |       |
|---------------------------------------------------------------------------------------|-------------|--------------------------------------------------------------------------------|------|------|-------|-------|-------|
|  | CXU 0220K01 | Electric base unit, 2 layer glazing. Exit safety kit with rain sensor included | 0.75 | 4.41 | 3,244 | 3,856 | 3,940 |
|                                                                                       | CXU 0225K01 | Electric base unit, 3 layer glazing. Exit safety kit with rain sensor included | 0.65 | 4.41 | 4,079 | 4,876 | 4,984 |

### Control unit

|         |                                                                               |     |     |     |
|---------|-------------------------------------------------------------------------------|-----|-----|-----|
| KES 305 | Control unit for glass rooflight exit 5A, for the control of 1 rooflight exit | 207 | 207 | 207 |
|---------|-------------------------------------------------------------------------------|-----|-----|-----|

### Installation accessories

|          |                               |     |     |     |
|----------|-------------------------------|-----|-----|-----|
| ZCU 0015 | Extension kerb 160mm flange   | 382 | 436 | 455 |
| ZZZ 210U | Securing kit for roofing felt | 63  | 72  | 75  |
| LSF 2000 | Lining***                     | 391 | 422 | 438 |


\* On the rectangular size, the window opens on the long side.  
\*\* Calculated for a reference size of 1.2x1.2m and 300mm upstand, in a 0° roof pitch.  
\*\*\* Lining for flat roof. This all-in-one solution includes PVC panels, vapour barrier and facings.

All prices in GBP (£)  
Find all sizes and prices on velux.co.uk





Anti-heat blind  
(MSU)



5070




Blackout blind  
(DSU)



4550



Insect screen  
(ZIU)



0000



# Blinds for curved and flat glass rooflights

## Anti-heat blind

The Anti-heat blind provides light dimming and heat protection to maintain a cool and comfortable room. The blind is discreetly placed inside the rooflight, and is easily installed from the roof when installing the rooflight.

- Reduces overheating.
- Semi-transparent fabric for light control and sky view.
- Solar-powered blind with remote control.
- Not compatible with Blackout blind.

## Blackout blind

The VELUX Blackout blind for glass rooflights blocks outside light anytime and is perfect for bedrooms. It is discreetly placed inside the rooflight and easily installed from the roof when installing the rooflight.

- Perfect sleep – day or night.
- Excellent blackout.
- Great for bedrooms and media rooms.
- Solar-powered blind with remote control.
- Not compatible with Anti-heat blind.

## Insect screen

The VELUX Insect screen for glass rooflights lets you enjoy fresh air and a view to the sky without the distraction of insects. It comes in a contemporary white design and is easy to install and simple to remove for cleaning.

- Fresh air and 100% insect-proof.
- Durable, transparent net fabric does not obstruct your view.
- Can be combined with an Anti-heat blind or a Blackout blind.

|                                                                                       |            |                 | 060060                                                                                | 080080                                                                                | 090060                                                                                | 090090                                                                                | 100100                                                                                | 120090                                                                                | 120120                                                                                | 150080                                                                                | 150100                                                                                | 150120                                                                                | 150150                                                                                | 200060                                                                                | 200100                                                                                |
|---------------------------------------------------------------------------------------|------------|-----------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Roof window size (w x h) cm                                                           |            |                 | 60×60                                                                                 | 80×80                                                                                 | 90×60                                                                                 | 90×90                                                                                 | 100×100                                                                               | 120×90                                                                                | 120×120                                                                               | 150×80                                                                                | 150×100                                                                               | 150×120                                                                               | 150×150                                                                               | 200×60                                                                                | 200×100                                                                               |
|                                                                                       |            |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |
|  | Solar MSU  | Anti-heat blind | 368                                                                                   | 384                                                                                   | 376                                                                                   | 392                                                                                   | 400                                                                                   | 420                                                                                   | 436                                                                                   | 412                                                                                   | 440                                                                                   | 456                                                                                   | 500                                                                                   | 448                                                                                   | 523                                                                                   |
|  | Solar DSU  | Blackout blind  | 368                                                                                   | 384                                                                                   | 376                                                                                   | 392                                                                                   | 400                                                                                   | 420                                                                                   | 436                                                                                   | 412                                                                                   | 440                                                                                   | 456                                                                                   | 500                                                                                   | 448                                                                                   | 523                                                                                   |
|  | Manual ZIU | Insect screen   | 85                                                                                    | 89                                                                                    | 87                                                                                    | 91                                                                                    | 93                                                                                    | 97                                                                                    | 101                                                                                   | 95                                                                                    | 102                                                                                   | 106                                                                                   | 116                                                                                   | 104                                                                                   | 121                                                                                   |

Solar MSU and DSU can be combined with our remotes and apps solutions for multiple product operation, scheduling and automation. Read more about these solutions on page 23.

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://www.velux.co.uk)





# Standard glass rooflight

Electric and fixed variant available

The Standard glass rooflight delivers great value at an affordable price through an unmatched combination of well-tested VELUX quality, competitive technical performance and modern glass design.

Featuring a 2-layer low-energy pane, it lets daylight flood into your room while still maintaining energy efficiency and acoustic insulation. Its clean lines and perfect roof fit make it a valuable addition to any home or building.

- Good daylight area.
- Reliable energy performance.
- Modern glass design with attention to detail.
- Good sound reduction.
- Proven and tested VELUX quality.

Find EPDs at [velux.co.uk/technical-library](https://www.velux.co.uk/technical-library)

## Roof pitch



## Details


- The perfect choice for roof pitches from 2-15°.
- Modern glass design with aluminium frame.
- PVC base unit construction provides good thermal and sound reduction.
- Comes with double glazing.
- Laminated insulated glass unit for safety.
- Burglary resistant\*.
- Comes in electrically vented or fixed variant.
- Electrically vented variant provides fresh air at the touch of a button and has an integrated rain sensor.

\* Complies with EU legislative requirements for burglary resistance, class 2.

## Blind options

- Considering blinds at the same time as the window is recommended. There are different blind options to choose from, both for heat protection and blackout purposes.

See more about blinds options on page 136.

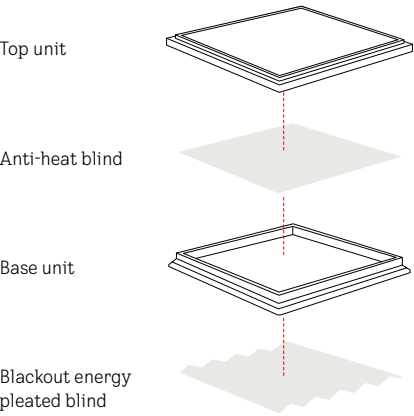

## Remotes and Apps

Easily control your VELUX solar and electric products with our remote controls or apps.

Free App Control included. Read more at [velux.co.uk/freeapp](https://www.velux.co.uk/freeapp)



| Available sizes              | 060060 | 060090 | 080080 | 090090  | 100100  | 090120  | 120120  | 100150  |
|------------------------------|--------|--------|--------|---------|---------|---------|---------|---------|
| Hole in roof (wxh) cm        | 60×60  | 60×90  | 80×80  | 90×90   | 100×100 | 90×120  | 120×120 | 100×150 |
| External frame size (wxh) cm | 78×78  | 78×108 | 98×98  | 108×108 | 118×118 | 108×138 | 138×138 | 118×168 |

| Window opening* | U-VALUE** |      |  |  |  |  |  |  |  |
|-----------------|-----------|------|--|--|--|--|--|--|--|
|                 | W/m² K    | Area |  |  |  |  |  |  |  |

| Top unit |                                         |     |     |     |     |     |     |     |     |
|----------|-----------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|
| ISG 2093 | Standard glass top with aluminium frame | 349 | 373 | 393 | 452 | 491 | 520 | 638 | 648 |

| Base unit   |                                             |      |     |     |       |       |       |       |       |       |       |
|-------------|---------------------------------------------|------|-----|-----|-------|-------|-------|-------|-------|-------|-------|
| CVP 0673QVA | Electrically vented burglary-resistant base | 0.80 | 3.4 | 991 | 1,018 | 1,040 | 1,105 | 1,149 | 1,182 | 1,269 | 1,302 |
| CFP 0073QV  | Fixed, burglary-resistant base              | 0.80 | 3.4 | 388 | 415   | 437   | 502   | 546   | 579   | 666   | 699   |

| Installation accessories |                                    |     |     |     |     |     |     |     |     |
|--------------------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|
| ZCE 0015                 | Extension kerb with flange 160mm   | 238 | 251 | 254 | 265 | 273 | 276 | 311 | 325 |
| ZZZ 210                  | Securing kit for roofing materials | 55  | 58  | 58  | 61  | 63  | 63  | 72  | 75  |
| LSF 2000                 | Lining***                          | 328 | 352 | 360 | 375 | 391 | 399 | 422 | 438 |

| Recommended blinds and shutters |                       |     |     |     |     |     |     |     |     |
|---------------------------------|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|
| MSG 6090                        | Solar Anti-heat blind | 302 | 309 | 315 | 322 | 325 | 335 | 341 | 348 |

\* On all rectangular sizes (electric base unit), the window opens on the short side.  
\*\* Calculated for a reference size of 1.2x1.2m and 300mm upstand, in a 2° roof pitch.  
\*\*\* Lining for flat roof. This all-in-one solution includes PVC panels, vapour barrier and facings.

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://www.velux.co.uk)





# Dome with glazing


Electric and fixed variant available

The VELUX Dome with glazing is an advanced dome solution for installation in 0-15° roof pitches. It is an effective product for letting in daylight and fresh air, without compromising on energy efficiency and comfort with sun and heat protection products. The insulated base unit has an integrated 2-layer insulating glass unit and the polycarbonate top unit is available in a clear or opaque version.

- Good daylight area.
- Good energy performance.
- Classic design.
- Good sound reduction.

Find EPDs at [velux.co.uk/technical-library](https://www.velux.co.uk/technical-library)

## Roof pitch



## Details


- Opaque dome for optimal privacy or clear dome for daylight and view to the sky.
- Base unit construction with insulating glass unit provides good thermal insulation.
- Comes with double glazing.
- Laminated insulated glass unit for safety.
- Burglary resistant.\*
- Comes in a fixed or electrically vented variant.
- Electrically vented variant provides fresh air at the touch of a button and has an integrated rain sensor.

\* Complies with EU legislative requirements for burglary resistance, class 2.

## Blind options

- Considering blinds at the same time as the roof window is recommended. There are different blind options to choose from, both for heat protection and blackout purposes.

See more about blind options on page 136.

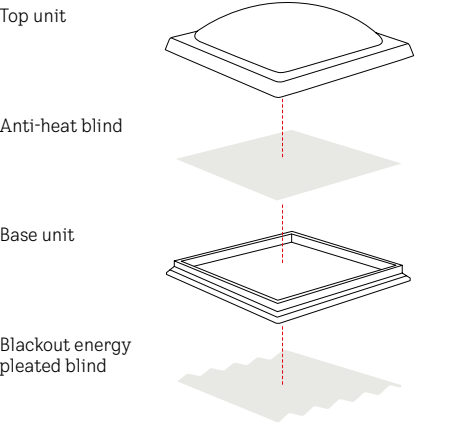

## Remotes and Apps

Easily control your VELUX solar and electric products with our remote controls or apps.

Free App Control included. Read more at [velux.co.uk/freeapp](https://www.velux.co.uk/freeapp)



| Available sizes              | 060060 | 060090 | 080080 | 090090  | 100100  | 090120  | 120120  | 100150  | 150150  |
|------------------------------|--------|--------|--------|---------|---------|---------|---------|---------|---------|
| Hole in roof (wxh) cm        | 60×60  | 60×90  | 80×80  | 90×90   | 100×100 | 90×120  | 120×120 | 100×150 | 150×150 |
| External frame size (wxh) cm | 78×78  | 78×108 | 98×98  | 108×108 | 118×118 | 108×138 | 138×138 | 118×138 | 168×168 |

| Window opening* | U <sub>w</sub> -VALUE** | W/m² K | Area |
|-----------------|-------------------------|--------|------|
|                 |                         |        |      |

| Top unit                  | ISD 0010G | ISD 0110G |
|---------------------------|-----------|-----------|
| Clear polycarbonate dome  | 256       | 274       |
| Opaque polycarbonate dome | 256       | 274       |

| Base unit                                   | CVP 0673QVA | CFP 0073QV |
|---------------------------------------------|-------------|------------|
| Electrically-vented burglary-resistant base | 0.80        | 3.4        |
| Fixed, burglary-resistant base              | 0.80        | 3.4        |

| Installation accessories          | ZCE 0015 | ZZZ 210 | LSF 2000 |
|-----------------------------------|----------|---------|----------|
| Extension kerb with flange 160mm  | 238      | 251     | 254      |
| Securing kit for roofing material | 55       | 58      | 58       |
| Lining***                         | 328      | 352     | 360      |

| Recommended blinds and shutters | MSG 6090 |
|---------------------------------|----------|
| Solar Anti-heat blind           | 302      |


\* On all rectangular sizes (electric base unit), the roof window opens on the short side.  
\*\* Calculated for a reference size of 1.2x1.2m and 300mm upstand, in a 0° roof pitch.  
\*\*\* Lining for flat roof. This all-in-one solution includes PVC panels, vapour barrier and facings.

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://www.velux.co.uk)






Roof pitch



Details

- Note: this product is not compatible with VELUX flat roof blinds FMG, FMK and MSG.




Roof exit

The manually operated Roof exit window opens extra wide to provide easy access to the roof. Fully compliant with all relevant EU legislative requirements, the VELUX Roof exit is a double glazed roof window with a laminated inner pane that prevents glass from splintering in the event of breakage. It is available with an opaque or clear polycarbonate dome.


- Extra-large opening for easy access to the roof.
- Improved comfort with low-energy double glazing.
- Tilted interior frame increases daylight in the room.
- Opening angle of approximately 60°.
- Excellent insulating value and sound reduction.

| Available sizes                                                                                                                                              |                                                                      | 090120                                                                                | 100100                                                                                | 120120                                                                                |       |       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------|-------|
| Hole in roof (wxh) cm                                                                                                                                        |                                                                      | 90x120                                                                                | 100x100                                                                               | 120x120                                                                               |       |       |
| External frame size (wxh) cm                                                                                                                                 |                                                                      | 108x138                                                                               | 118x118                                                                               | 138x138                                                                               |       |       |
| <div><div>h</div><div></div><div>w</div></div> <div>Window opening*</div> | <div><div>U<sub>w</sub>-VALUE**</div><div>W/m² K    Area</div></div> |  |  |  |       |       |
| Top unit                                                                                                                                                     |                                                                      |                                                                                       |                                                                                       |                                                                                       |       |       |
| ISD 0010G                                                                                                                                                    | Clear polycarbonate dome                                             | 383                                                                                   | 361                                                                                   | 469                                                                                   |       |       |
| ISD 0110G                                                                                                                                                    | Opaque polycarbonate dome                                            | 383                                                                                   | 361                                                                                   | 469                                                                                   |       |       |
| Base unit                                                                                                                                                    |                                                                      |                                                                                       |                                                                                       |                                                                                       |       |       |
| CXP 0473Q                                                                                                                                                    | Manually operated Roof exit window base                              | 0.86                                                                                  | 3.4                                                                                   | 1,169                                                                                 | 1,103 | 1,346 |
| Installation accessories                                                                                                                                     |                                                                      |                                                                                       |                                                                                       |                                                                                       |       |       |
| ZCE 0015                                                                                                                                                     | Extension kerb with flange 160mm                                     | 276                                                                                   | 273                                                                                   | 311                                                                                   |       |       |
| ZZZ 210                                                                                                                                                      | Securing kit for roofing material                                    | 63                                                                                    | 63                                                                                    | 72                                                                                    |       |       |

\* On the rectangular size, the roof window opens on the short side.  
\*\* Calculated for a reference size of 1.2x1.2m and 300mm upstand, in a 0° roof pitch.  
Find EPDs at [velux.co.uk/technical-library](http://velux.co.uk/technical-library)

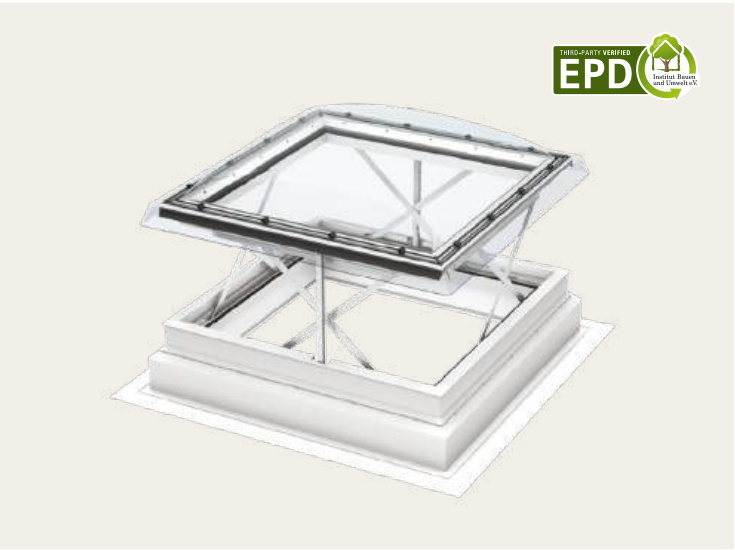


Roof pitch



Details

- Specific smoke ventilation accessories may be required and can be purchased separately.
- Only compatible with VELUX flat roof blinds FSK and MSG. An approval by local fire authorities is needed before installation.



Smoke ventilation

The Smoke ventilation roof window automatically opens when smoke and fire are detected to release smoke and excess heat. It can also be opened for fresh air to improve the indoor climate. Its burglar-proof construction provides additional security while a laminated inner pane prevents glass from shattering if it breaks.

- Available for 1.13m² (100x100cm) or 1.48m² (120x120cm) of smoke-free geometric ventilation area.
- Compliant with EU legislative requirements.
- Automatically opens in case of fire.
- Heavy-duty reliable scissor opening mechanism.
- Low-energy double glazing with two energy coatings.
- Tested and certified to EN ISO 12101-2.

| Available sizes                        |                                         | 100100                                                                       | 120120                            |       |       |
|----------------------------------------|-----------------------------------------|------------------------------------------------------------------------------|-----------------------------------|-------|-------|
| Hole in roof (wxh) cm                  |                                         | 100x100                                                                      | 120x120                           |       |       |
| External frame size (wxh) cm           |                                         | 118x118                                                                      | 138x138                           |       |       |
|                                        |                                         | <div><div><b>U<sub>w</sub>-VALUE*</b></div><div>W/m² K      Area</div></div> | <div><div></div><div></div></div> |       |       |
| Top unit                               |                                         |                                                                              |                                   |       |       |
| ISD 0010G                              | Clear polycarbonate dome                | 361                                                                          | 469                               |       |       |
| ISD 0110G                              | Opaque polycarbonate dome               | 361                                                                          | 469                               |       |       |
| Base unit                              |                                         |                                                                              |                                   |       |       |
| CSP 1073Q                              | Smoke ventilation roof window base unit | 0.99                                                                         | 3.4                               | 2,184 | 2,664 |
| Specific smoke ventilation accessories |                                         |                                                                              |                                   |       |       |
| KFC 310 EU                             | Control unit for 1 CSP                  | -                                                                            | 671                               |       |       |
| KFA 100                                | Smoke detector                          | -                                                                            | 99                                |       |       |
| KFK 300                                | Break glass point                       | -                                                                            | 94                                |       |       |

\* Calculated for a reference size of 1.2x1.2m and 300mm upstand, in a 0° roof pitch.  
All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](http://velux.co.uk)  
Find EPDs at [velux.co.uk/technical-library](http://velux.co.uk/technical-library)






Anti-heat blind

The VELUX Anti-heat blind provides light dimming and heat protection so your indoor temperature stays cool and comfortable. This makes it perfect for living rooms with activity during the day.


6090



Blackout energy pleated blind



1045



1047

# Blinds for standard glass rooflights and domes with glazing\*

**Anti-heat blind\*\***

The VELUX Anti-heat blind provides light dimming and heat protection so your indoor temperature stays cool and comfortable. This makes it perfect for living rooms with activity during the day.

- Reduces solar heating.
- Semi-transparent fabric lets in natural light.
- Available in solar powered operation with app and remote control.

**Blackout energy pleated blind**

The VELUX blackout energy pleated blind for flat roof windows darkens the room and protects against cold. This makes it the ideal choice for bedrooms and living rooms.

- Blackout and insulating effect.
- Available in solar-powered and electric operation with app and remote control.
- OEKO-TEX® STANDARD 100 (1076-184) – The original safety standard.
- OEKO-TEX® STeP (22002567) – Responsible production for people and planet.




| Roof window size (wxh) cm |              | 060060                        | 060090 | 080080 | 090090 | 100100  | 090120 | 120120  | 100150  | 150150  |
|---------------------------|--------------|-------------------------------|--------|--------|--------|---------|--------|---------|---------|---------|
|                           |              | 60×60                         | 60×90  | 80×80  | 90×90  | 100×100 | 90×120 | 120×120 | 100×150 | 150×150 |
|                           |              |                               |        |        |        |         |        |         |         |         |
|                           | Solar MSG    | Anti-heat blind               | 302    | 309    | 315    | 322     | 325    | 335     | 341     | 348     |
|                           | Solar FSK    | Blackout energy pleated blind | 298    | 304    | 311    | 317     | 320    | 330     | 336     | 404     |
|                           | Electric FMK | Blackout energy pleated blind | 277    | 283    | 289    | 295     | 298    | 307     | 313     | 376     |

\*Also compatible with Curved top unit (ISD 1093) and Flat top unit (ISD 2093) for roof windows CFP/CVP bought before July 2021. Solar-powered blinds are not compatible with opaque dome with glazing variants.  
\*\*Anti-heat blind not compatible with flat glass top unit ISD 2093 for roof windows CFP/CVP.

Solar MSG is not compatible with ISD 2093. Solar MSG and FSK and electric FMK can be combined with our remotes and apps solutions for multiple product operation, scheduling and automation. Read more about these solutions on page 23.

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://www.velux.co.uk)



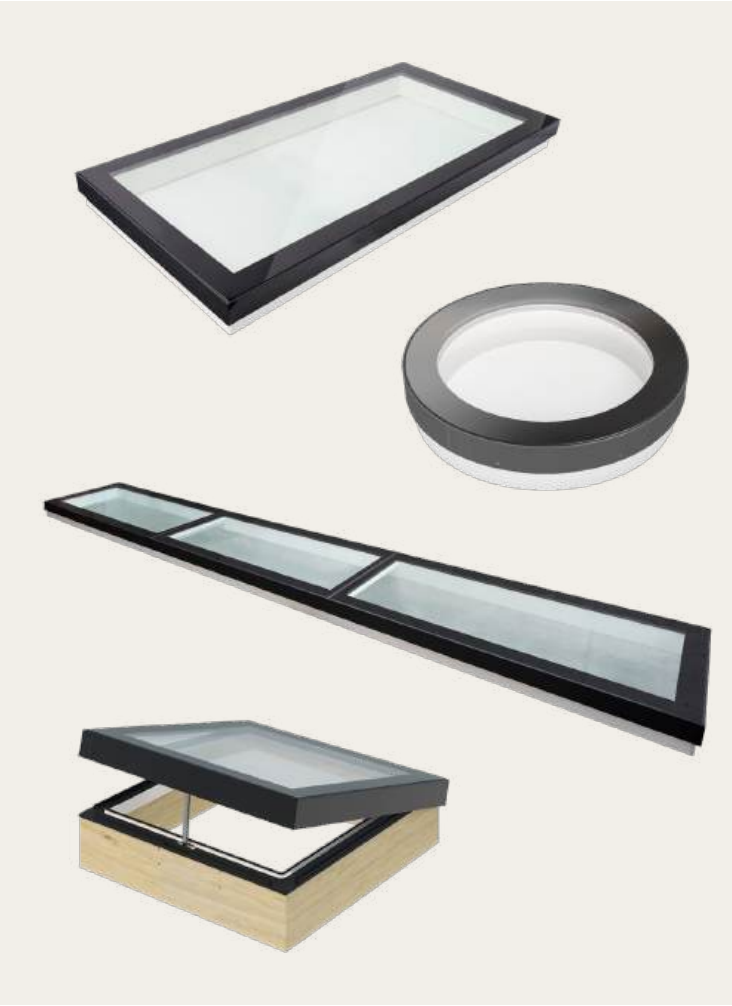

# VARIO by VELUX

Bespoke rooflights for any project

Design and build your rooflights just the way you want them with VARIO by VELUX. Use the Design a Rooflight configurator tool available on the VELUX website to create flat roof iconic designs for your project. The tool gives you a 3D illustration of the rooflight and access to real-time prices.

- Custom-made designs for all types of project.
- Huge variety of shapes, colours and features.
- Sizes up to 4m² of clear internal glass.

For further information visit:  
[vario.velux.com/buildyourown](http://vario.velux.com/buildyourown)

## Roof pitch



## Exterior finish options



## Rooflight options

- Fixed up to 4m².
- Opening up to 4m².
- Walk-on up to 3m².
- Round up to Ø 1300mm.
- Unlimited up to 4m² per module.

## Details

- The elegant choice for roof pitches from 0-15° (with a recommendation for the rooflights to be installed at a minimum pitch of 3°).
- Glass-to-edge flat glass top unit.
- Unique window construction with a slim frame and invisible sash.
- Available with double or triple glazing for excellent energy performance and sound reduction.
- Laminated insulated glass unit for safety.
- Comes in a fixed or electrically-vented variant.
- Electrically-vented variant provides fresh air at the touch of a button, with an additional rain sensor providing automatic closure if required.
- io-homecontrol compatible including VELUX remote controls and VELUX ACTIVE.
- Special variants complies with EU legislative requirements for burglary resistance, class 2.

## Blind options

- Blinds are available for windows between 600-1000mm in width and longer than 725mm. Featuring light diffusing, fire retardant fabric and available in a choice of White, Grey or Black colour. Electrically operated they provide a simple solution to privacy and shading.



## Contact us

[vario@velux.co.uk](mailto:vario@velux.co.uk)  
+44 (0) 1592 778 246



Flat roof windows





10  
Year  
Guarantee

# Sun tunnels

---

## Sun tunnels


For sloped roofs  
For flat roofs

Page 142







Roof pitch



Tunnel options



Light diffuser Edge Glow

- Our Edge Glow light diffuser spreads the light from the Sun tunnel throughout the room.

See image on page 143.



Sun tunnel, sloped roof

Rigid and flexible tunnel options available

Add natural light to spaces where you never felt it was possible with a VELUX Sun tunnel. Perfect for windowless bathrooms, walk-in wardrobes and hallways.

Use rigid sun tunnels when there is direct access between the roof and the ceiling of the room. Flexible sun tunnels should be used when there is an object, such as a beam, restricting access.

Rigid sun tunnels

- Recommended for maximum daylight, because of its super high reflective coating.
- Up to 98% daylight reflectivity for optimal natural light conditions.
- Elegant, maintenance-free exterior glass module.
- Recommended tunnel length 0.9 - 6m.
- 1.7m tunnel supplied (ZTR extensions are available).
- Available in 25cm and 35cm diameters.

Flexible sun tunnels

- Flexible fibreglass tunnel, with reflective inner coating.
- Elegant maintenance-free exterior glass module.
- Recommended tunnel length is 1.5m.
- 2m tunnel supplied.
- Available in 35cm diameter.

| Tunnel diameter              | 10"/25cm | 14"/35cm |
|------------------------------|----------|----------|
| External frame size (wxh) cm | 37x37    | 46x46    |



Rigid sun tunnels

|               |                                                             |     |     |
|---------------|-------------------------------------------------------------|-----|-----|
| TWR OK10 2010 | 25cm diameter rigid tunnel for tiles up to 120mm in profile | 398 | -   |
| TLR OK10 2010 | 25cm diameter rigid tunnel for slate up to 8mm thick        | 398 | -   |
| TWR OK14 2010 | 35cm diameter rigid tunnel for tiles up to 120mm in profile | -   | 458 |
| TLR OK14 2010 | 35cm diameter rigid tunnel for slate up to 8mm thick        | -   | 458 |

Flexible sun tunnels

|               |                                                                |   |     |
|---------------|----------------------------------------------------------------|---|-----|
| TWF OK14 2010 | 35cm diameter flexible tunnel for tiles up to 120mm in profile | - | 398 |
| TLF OK14 2010 | 35cm diameter flexible tunnel for slate up to 8mm thick        | - | 398 |

Accessories


|               |                                                                                                      |    |     |
|---------------|------------------------------------------------------------------------------------------------------|----|-----|
| ZTR OK10 0062 | 600mm extension section for 25cm rigid diameter sun tunnel                                           | 82 | -   |
| ZTR OK14 0062 | 600mm extension section for 35cm rigid diameter sun tunnel                                           | -  | 82  |
| ZTR OK14 0124 | 1.2m extension section for 35cm rigid diameter sun tunnel                                            | -  | 160 |
| ZTL 014       | Low-energy light kit for 25cm and 35cm, fits inside tunnel, requires mains connection. Bulb supplied | -  | 102 |

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](https://www.velux.co.uk)






Roof pitch



Tunnel option

Flexible



Light diffuser Edge Glow

- Our Edge Glow light diffuser spreads the light from the sun tunnel throughout the room.

See image on page 145.

# Sun tunnel, flat roof

Flexible tunnel

Used for installation in flat roofs to bring natural light into areas of the house where a flat roof window installation is either not possible or not appropriate. The frame is made of white PVC. Supplied with polycarbonate dome.

## Flexible sun tunnels

- Flexible fibreglass tunnel, with reflective inner coating.
- Recommended tunnel length for flat roof is between 0.2m and 0.9m.
- 0.9m tunnel supplied.
- Available in 35cm diameter.

|                              |                                                                                                      |          |
|------------------------------|------------------------------------------------------------------------------------------------------|----------|
| Tunnel diameter              |                                                                                                      | 14"/35cm |
| External frame size (w×h) cm |                                                                                                      | 60x60    |
|                              |                                                                                                      |          |
| Flexible sun tunnels         |                                                                                                      |          |
| TCF OK14 1010                | 35cm diameter flat roof flexible tunnel with polycarbonate cover                                     | 481      |
| Accessories                  |                                                                                                      |          |
| ZTL 014                      | Low-energy light kit for 25cm and 35cm, fits inside tunnel, requires mains connection. Bulb supplied | 102      |

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](http://velux.co.uk)





# Accessories

---

## Accessories

Page 148

Electric accessories  
Rod controls  
Locks and restrictors  
Maintenance kits  
Control and smoke ventilation systems  
Installation tools





KUX 110



KSX 100K




KLB 100



KLI 311, 312 and 313



KLF 150



KSX 100



ZCT 100 and ZCT 200K



ZOZ 085



ZOZ 012K1



ZOZ 010KC S011



ZOZ 246



ZZZ 129KI and ZZZ 130KI



ZZZ 131KI



ZZZ 176KI

# Roof window accessories

## Electric accessories

### Power supply KUX 110

Power supply for remote operation of VELUX electric anti-heat blinds and shutters or interior blinds on a manual roof window or fixed flat roof window.

### Upgrade kit KSX 100K

Complete solar-powered upgrade kit for VELUX Manual centre-pivot roof window. Upgrades manual roof windows to remote operation with no wiring needed. Includes rain sensor. For roof windows manufactured after February 2014. Not compatible with CK01, CK02, MK27, PK25 and SK01.

### Battery backup KLB 100

The battery backup ensures that if there is a power outage, VELUX electrically operated roof windows are closed and VELUX electrically operated blinds/shutters are raised. It is recommended for use in regions affected by frequent power failures.

### VELUX Wall switch – roof windows KLI 311

The wireless Wall switch KLI 311 lets you conveniently open, stop and close VELUX solar and electrically operated roof windows or VELUX roof windows

that have been upgraded for electric or solar operation. One switch can be used to operate several roof windows.

### VELUX Wall switch – interior sunscreening KLI 312

The wireless Wall Switch KLI 312 lets you conveniently open, stop and close VELUX solar and electrically operated interior blinds. One switch can be used to operate several blinds.

### VELUX Wall switch – exterior heat protection KLI 313

The Wall switch KLI 313 lets you conveniently open, stop and close solar or electrically operated VELUX exterior anti-heat blinds and shutters. One switch can be used to operate several exterior blinds or shutters.

### VELUX Interface KLF 150

KLF 150 is programmable and can be used for operation of io-homecontrol® compatible electrical products via external control devices like switches and sensors (potential-free contacts). Can operate 5 products or 5 groups with up to 200 electrical products. Can also be used to boost the range of the wireless controllers.

## Upgrade kit KSX 100

Complete solar-powered upgrade kit for VELUX Manual centre-pivot roof window. Upgrades manual roof windows to remote operation with no wiring needed. Includes rain sensor. For roof windows manufactured between April 1986 and January 2014. Not compatible with M27, P25 and 425.

## Rod controls

### Telescopic control rod ZCT 200K

The 100-180cm expandable rod enables operation of VELUX manually operated centre-pivot roof windows, interior blinds and insect screens installed out-of-reach.

### Control rod extension ZCT 100

Extension piece for telescopic control rod ZCT 200K, adding an additional 100cm to the 180cm long telescopic control rod.

### Interior blind adaptor ZOZ 085

Adaptor to allow remote operation of interior blind by control rod ZCT 200K.

## Locks and restrictors

### Security lock ZOZ 012K1

Extra security lock for VELUX centre-pivot roof windows that prevents the roof windows from being opened from the inside without a key.

### Opening restrictor with key ZOZ 010KC S011

Opening restrictor (safety latch) that prevents VELUX centre-pivot roof windows from opening more than 10cm. Suitable for roof windows of frame height 98cm and above.

## Maintenance kits

### ZZZ 129KI

Professional repair kit designed to cover up marks and top-finish scratches on VELUX white maintenance-free roof windows.

### ZZZ 130KI

Professional repair kit designed to repair marks and top-finish scratches on VELUX white painted roof windows.

### ZZZ 131KI

Care kit for VELUX white painted roof windows. Includes special cleaner for removal of oil and grease, protector to restore the water-repellent surface and an application sponge.

### ZZZ 176KI

Professional repair kit designed to repair marks and top-finish scratches on VELUX clear lacquered roof windows.

## Installation accessory

### ZOZ 246

Dual solar switch allows charging of both shutters and awnings on solar-powered VELUX roof windows. For installation of solar-powered shutters and Anti-heat blinds on solar-powered roof windows or added solar openers for manual roof windows, please contact VELUX Customer Service to ensure compatibility.

| Electric accessories   |     |
|------------------------|-----|
| KUX 110                | 138 |
| KSX 100K               | 297 |
| KSX 100                | 297 |
| KLB 100                | 204 |
| KLI 311                | 26  |
| KLI 312                | 26  |
| KLI 313                | 26  |
| KLF 150                | 155 |
| Rod controls           |     |
| ZCT 100                | 20  |
| ZCT 200K               | 34  |
| ZOZ 085                | 10  |
| Locks and restrictors  |     |
| ZOZ 012K1              | 67  |
| ZOZ 010KC S011         | 66  |
| Maintenance kits       |     |
| ZZZ 129KI              | 17  |
| ZZZ 130KI              | 18  |
| ZZZ 131KI              | 38  |
| ZZZ 176KI              | 18  |
| Installation accessory |     |
| ZOZ 246                | 61  |

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](http://velux.co.uk)



KFX S3050



KFC 310



KFC 305



KLA 200



KFA 100



KFK 200



KFK 300



Carrying straps ZZZ 244



Frame protectors ZZZ 258

# Control systems and accessories for smoke ventilation systems

## Control systems

**Control systems for smoke ventilation windows GGL/GGU 40D and CSP**  
Connection options for higher-level, external control systems and fire alarm systems. Integrated forwarding of alarm and error messages as well as time ventilation.

- KFX S3050**  
VELUX smoke ventilation control system
- 1 control unit to connect: 2 smoke ventilation pitched roof windows (incl. battery backup for at least 72 hours)
  - 2 break-glass point KFK 300 Grey
  - 1 smoke detector KFA 100
  - Other colours available: KFX S3051 Red, KFX S3052 Yellow, KFX S3053 Blue, KFX S3054 Orange

## Control units

- KFC 305**  
VELUX smoke ventilation control unit 5A
- 1 control unit for connecting up to: 2 smoke ventilation pitched roof windows (incl. battery backup for at least 72 hours).

For the control units, the accessories must be ordered separately.

- KFC 310**  
VELUX smoke ventilation control unit 10A
- 1 control unit for connecting up to: 1 smoke ventilation flat roof window (incl. battery back-up for at least 72 hours) or 4 smoke ventilation pitched roof windows
  - 2 control units in BUS connection for connecting up to: 2 smoke ventilation flat roof windows or 8 smoke ventilation pitched-roof windows.

For the control units, the accessories must be ordered separately.

## Accessories

- KFA 100**  
Diffused light smoke detector, white.
- KFK 200**  
Comfort ventilation switch, concealed, pearl white.
- KFK 300**  
Break glass point, grey  
KFK 301 Red, KFK 302 Yellow, KFK 303 Blue, KFK 304 Orange.
- KLA 200**  
Rain sensor, grey, in combination with KFC 305/310 control unit and VELUX GGL/GGU and CSP smoke ventilation roof windows.

| Control sytems and control units |     |
|----------------------------------|-----|
| KFX S3050                        | 824 |
| KFC 305                          | 537 |
| KFC 310                          | 671 |
| Accessories                      |     |
| KFA 100                          | 99  |
| KFK 200                          | 54  |
| KFK 300                          | 94  |
| KLA 200                          | 78  |

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](http://velux.co.uk)

# Installation tools

A wide range of tools are available to make installing VELUX roof windows easier and more convenient. These tools optimise the critical parts of the installation flow that involve lifting to reduce the risk of damage during:

- Transportation to the roof.
- Installation of window sash.

**Carrying straps ZZZ 244**  
With the flexible carrying straps, two people can securely carry large and heavy VELUX boxes to the roof with no additional equipment. The straps can be used with all VELUX roof windows for convenient lifting and precise manoevrability through narrow passageways and staircases.

**Frame protectors ZZZ 258**  
The reusable VELUX Frame protectors are designed to reduce the risk of damage when reinstalling a window into the window frame. Made of durable rubber, the set of three protectors can be fitted onto the bottom and side frames of any VELUX roof window to prevent it from making marks in the frame.

| Installation tools |                 |    |
|--------------------|-----------------|----|
| ZZZ 244            | Carrying straps | 53 |
| ZZZ 258            | Protecting tool | 35 |

All prices in GBP (£)  
Find all sizes and prices at [velux.co.uk](http://velux.co.uk)





# Practical information

|                                                                                                                              |          |
|------------------------------------------------------------------------------------------------------------------------------|----------|
| <b>Practical information</b><br>VELUX Installer Partner Programme<br>Dealer information<br>After sales service<br>Guarantees | Page 154 |
| <b>The VELUX product code system</b><br>How to locate your roof window type and size                                         | Page 156 |
| <b>Compatibility</b><br>Blinds compatibility<br>Heat protection compatibility                                                | Page 157 |
| <b>Glazing options</b>                                                                                                       | Page 162 |
| <b>Roof window replacement</b>                                                                                               | Page 164 |
| <b>Size guide</b>                                                                                                            | Page 166 |

# VELUX Installer Partner Programme




## Join the VELUX Installer Partner Programme

The VELUX Partner Programme is a tiered programme that provides valuable services and benefits to installers as you install VELUX roof windows and engage with us. The more active you are, the more you unlock.

The programme is designed for professionals installing VELUX roof windows, recognising your skills, effort and commitment.

Join now




## Why join?

As a Partner Programme member, you will enjoy five key benefits.



### Sharpen your skills

Access training and stay up to date with the latest techniques, products and standards.




### Grow your business

Get marketing tools, support and leads to attract more customers.



### Earn member benefits

Turn your engagement into real rewards and exclusive opportunities.



### One location for all VELUX services

Manage product registrations, training, projects and rewards in one place.



### Be part of a professional community

Connect with other skilled installers and gain recognition for your expertise.

# Practical information



## Dealer information

The easiest way to place a merchant order is via our Dealer Extranet or EDI platforms. VELUX Dealer Extranet offers a number of additional features, such as creating quotes, client quotes, delivery track and trace, return requests and much, much more.

Access Dealer Extranet at [dealerextranet3.velux.co.uk](https://dealerextranet3.velux.co.uk)

EDI (Electronic Data Interchange) may be a suitable option for merchants who place a large number of orders each month. VELUX can accommodate a number of different EDI formats.

To explore options, please email: [etrading@velux.co.uk](mailto:etrading@velux.co.uk) with your requirements.



## Customer Support

Whether you need installation guidance, have a question about a specific product, or are looking for tips for your project, the VELUX Customer Service team are ready to assist:

**Business customers**  
01592 778225

**Homeowners**  
01592 778225

**Project support**  
01592 778873 ext. 154



## Guarantees

All VELUX products and accessories are thoroughly tested to deliver the high quality you expect. In the rare event that your VELUX product doesn't meet your expectations, we offer the following guarantees:



**10-year**  
VELUX pitched and flat roof windows, sun tunnels and sealing products.



**10-year**  
All sloping solar and electric roof windows.



**5-year**  
Solar or electric external shutters and Anti-heat blinds.



**3-year**  
Interior blinds and Insect screen, manual Anti-heat blinds, motors and accessories for solar and electric products.



**2-year**  
Roof windows for uninhabited spaces.

Register your products at [velux.co.uk/extendedwarranty](https://velux.co.uk/extendedwarranty)



# The VELUX product code system

All VELUX products use the following classification code system:

Window type

Window size

Interior finish

Exterior finish

Glazing

Operation

GGL MK06 2070 21

GGL MK06 2070 21

GGL MK06 2070 21

GGL MK06 2070 21

GGL MK06 2070 21

GGL MK06 2070 21

GGL MK06 2070 21

| Window types |                                                                   | Window size                                                                                                                                        | Glazing                                                                                                       |
|--------------|-------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| GBL          | Low pitch roof window in pine                                     | See all roof window sizes and compatibility table on page 166.                                                                                     | 70 2-layer glazing with rain noise reduction, laminated safety glass, UV protection and extra toughened glass |
| GCL          | Roof window for heritage, conservation and historical buildings   |                                                                                                                                                    |                                                                                                               |
| GDL          | Roof balcony in pine                                              |                                                                                                                                                    |                                                                                                               |
| GEL          | Top-hung roof terrace section in pine                             | Compatible roof windows, flashing frames, other built-in products and corresponding interior roller blinds are marked with a 'K' in the size code. | 68 3-layer glazing for improved energy efficiency                                                             |
| GGU          | Centre-pivot roof window in white maintenance-free                |                                                                                                                                                    |                                                                                                               |
| GGL          | Centre-pivot roof window in pine                                  |                                                                                                                                                    |                                                                                                               |
| GGLS         | Centre-pivot 3in1 roof window in pine                             | Compatible roof windows, flashing frames, other built-in products and corresponding interior roller blinds are marked with a 'K' in the size code. | 66 3-layer glazing for high energy efficiency with easy-to-clean and anti-dew coatings                        |
| GPLS         | Top-hung 3in1 roof window in pine                                 |                                                                                                                                                    |                                                                                                               |
| GPU          | Top-hung roof window in white maintenance-free, 45°               |                                                                                                                                                    |                                                                                                               |
| GPL          | Top-hung roof window in pine, 45°                                 | Interior finish                                                                                                                                    | 67 Our best performing 3-layer glazing delivering optimal energy efficiency and indoor comfort                |
| GIU          | Sloping extension window element in white maintenance-free        |                                                                                                                                                    |                                                                                                               |
| GIL          | Sloping extension window element in pine                          |                                                                                                                                                    |                                                                                                               |
| VIU          | Fixed vertical extension window element in white maintenance-free | 0 White maintenance-free<br>2 White painted wood<br>3 Clear lacquered pine                                                                         |                                                                                                               |
| VFE          | Openable vertical window element in pine, tilt inwards            |                                                                                                                                                    |                                                                                                               |
| VEA          | Left-hinged vertical roof terrace section in pine                 |                                                                                                                                                    |                                                                                                               |
| VEB          | Right-hinged vertical roof terrace section in pine                | Exterior cover                                                                                                                                     | Operation                                                                                                     |
| VEC          | Fixed vertical roof terrace section in pine                       |                                                                                                                                                    |                                                                                                               |
| GVT          | Side-hung roof exit for uninhabited rooms (black polyurethane)    |                                                                                                                                                    |                                                                                                               |
| TWF/TLF      | Flexible sun tunnel                                               | 0 Aluminium                                                                                                                                        | 21U Electrically operated roof window                                                                         |
| TWR/TLR      | Rigid sun tunnel                                                  |                                                                                                                                                    |                                                                                                               |
| CVU          | Solar or electric flat roof window                                |                                                                                                                                                    |                                                                                                               |
| CFU          | Fixed flat roof window                                            |                                                                                                                                                    | 30 Solar-powered roof window                                                                                  |
| CSP          | Flat roof smoke ventilation window                                |                                                                                                                                                    |                                                                                                               |
| CXP          | Flat roof exit window, 60°                                        |                                                                                                                                                    |                                                                                                               |
| CVP          | Electric flat roof window                                         |                                                                                                                                                    | 40 Smoke ventilation                                                                                          |
| CFP          | Fixed flat roof window                                            |                                                                                                                                                    |                                                                                                               |

# Heat protection compatibility

## – roof windows

Which heat protection products are suitable for which roof windows?

| Anti-heat blackout shutters                                                                           |                                                                                                                                                                                                       |                                                                                                                               |
|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| <div><div>SSL</div><div>SML</div><div>SMH</div></div>                                                 |                                                                                                                                                                                                       |                                                                                                                               |
| Roof window                                                                                           | Solar Anti-heat blackout shutter                                                                                                                                                                      | Electric Anti-heat blackout shutter                                                                                           |
| <div><div></div><div>Manual top-hung and centre-pivot roof window<br/>GPU, GPL / GGU, GGL</div></div> | SSL                                                                                                                                                                                                   | SML <ul style="list-style-type: none"><li>For VELUX manual GPU, GPL / GGU, GGL, a KUX 110 control system is needed.</li></ul> |
| <div><div></div><div>Solar centre-pivot roof window<br/>GGU, GGL</div></div>                          | SSL <ul style="list-style-type: none"><li>For VELUX solar GGL/GGU in widths C--- and F---, a ZOZ 246 kit is needed. For older generations contact customer service for further information.</li></ul> | –                                                                                                                             |
| <div><div></div><div>Electric centre-pivot roof window<br/>GGU, GGL</div></div>                       | –                                                                                                                                                                                                     | SML                                                                                                                           |
| <div><div></div><div>Electric top-hung roof window<br/>GPU</div></div>                                | –                                                                                                                                                                                                     | SMH                                                                                                                           |

| Anti-heat blinds and Anti-heat blackout blinds                                                                                                                                                        |                                                                                                                                                                                                       |                                                                                                                               |                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|------------------------|
| <div><div>SSS</div><div>MSL</div><div>MML</div><div>MHL</div></div>                                                                                                                                   |                                                                                                                                                                                                       |                                                                                                                               |                        |
| Anti-heat blackout blind                                                                                                                                                                              | Solar Anti-heat blind                                                                                                                                                                                 | Electric Anti-heat blind                                                                                                      | Manual Anti-heat blind |
| SSS                                                                                                                                                                                                   | MSL                                                                                                                                                                                                   | MML <ul style="list-style-type: none"><li>For VELUX manual GPU, GPL / GGU, GGL, a KUX 110 control system is needed.</li></ul> | MHL                    |
| SSS <ul style="list-style-type: none"><li>For VELUX solar GGL/GGU in widths C--- and F---, a ZOZ 246 kit is needed. For older generations contact customer service for further information.</li></ul> | MSL <ul style="list-style-type: none"><li>For VELUX solar GGL/GGU in widths C--- and F---, a ZOZ 246 kit is needed. For older generations contact customer service for further information.</li></ul> | –                                                                                                                             | –                      |
| –                                                                                                                                                                                                     | –                                                                                                                                                                                                     | MML                                                                                                                           | –                      |
| –                                                                                                                                                                                                     | –                                                                                                                                                                                                     | MML <ul style="list-style-type: none"><li>For VELUX electric GPU roof windows, a ZOZ 229S kit is needed.</li></ul>            | –                      |

### Mounting accessories

**ZOZ 246**  
Solar kit for solar shutter SSL and solar Anti-heat blinds SSS or MSL. For installation on solar roof windows.

See more on page 149.

**ZOZ 229S**  
Mounting kit for electric Anti-heat blinds MML. For installation on VELUX electric top-hung roof window GPU.

Note: The usage of the mounting kit reduces the blackout effect of the Anti-heat blackout blind SSS.

### Installation advice

Anti-heat blackout shutters can be installed on vertically connected roof windows with a minimum distance of 250mm. On roof windows next to each other a minimum distance of 100mm is required.

Electric Anti-heat blinds can be installed on vertically connected roof windows with a minimum distance of 250mm. On roof windows next to each other a minimum distance of 18mm is required.



# Heat protection compatibility – combinations

Which heat protection products suit which roof window combinations?

| Anti-heat blackout shutters                                                                                                                   |                                                                                    |                                                                                                                               |
|-----------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| <div><div>SSL</div><div>SML</div><div>SMH</div></div>                                                                                         |                                                                                    |                                                                                                                               |
| Roof window combination                                                                                                                       | Solar Anti-heat blackout shutter                                                   | Electric Anti-heat blackout shutter                                                                                           |
| Side-by-side/Triple <div></div>                              | SSL                                                                                | SML <ul style="list-style-type: none"><li>For VELUX manual GPU, GPL / GGU, GGL, a KUX 110 control system is needed.</li></ul> |
| 3in1 <div></div>                                             | SSLS                                                                               | –                                                                                                                             |
| Sloping extension with fixed GIU/GIL <div></div>           | –                                                                                  | SMG                                                                                                                           |
| Façade integration with openable, vertical VFE <div></div> | SSL <ul style="list-style-type: none"><li>Only for sloping roof windows.</li></ul> | SML <ul style="list-style-type: none"><li>Only for sloping roof windows.</li></ul>                                            |
| Façade integration with fixed window VIU <div></div>       | SSL <ul style="list-style-type: none"><li>Only for sloping roof windows.</li></ul> | SML <ul style="list-style-type: none"><li>Only for sloping roof windows.</li></ul>                                            |
| Vertical duo <div></div>                                   | SSL                                                                                | SML                                                                                                                           |
| Quattro <div></div>                                        | –                                                                                  | SMG                                                                                                                           |
| Roof balcony GDL <div></div>                               | –                                                                                  | –                                                                                                                             |

| Anti-heat blinds and Anti-heat blackout blinds                                                                     |                                                                                                                    |                                                                                                                               |                        |
|--------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|------------------------|
| <div><div>SSS</div><div>MSL</div><div>MML</div><div>MHL</div></div>                                                |                                                                                                                    |                                                                                                                               |                        |
| Anti-heat blackout blind                                                                                           | Solar Anti-heat blind                                                                                              | Electric Anti-heat blind                                                                                                      | Manual Anti-heat blind |
| SSS                                                                                                                | MSL                                                                                                                | MML <ul style="list-style-type: none"><li>For VELUX manual GPU, GPL / GGU, GGL, a KUX 110 control system is needed.</li></ul> | MHL                    |
| SSSS                                                                                                               | MSLS                                                                                                               | –                                                                                                                             | –                      |
| SSI <ul style="list-style-type: none"><li>For VELUX electric GPU roof windows, a ZOZ 229S kit is needed.</li></ul> | MSI <ul style="list-style-type: none"><li>For VELUX electric GPU roof windows, a ZOZ 229S kit is needed.</li></ul> | –                                                                                                                             | MHL top<br>MAG bottom  |
| SSS <ul style="list-style-type: none"><li>Only for vertical roof windows.</li></ul>                                | MSL <ul style="list-style-type: none"><li>Only for sloping roof windows.</li></ul>                                 | MML <ul style="list-style-type: none"><li>Only for sloping roof windows.</li></ul>                                            | MHL top<br>MIE bottom  |
| SSS <ul style="list-style-type: none"><li>Only for vertical roof windows.</li></ul>                                | MSL <ul style="list-style-type: none"><li>Only for sloping roof windows.</li></ul>                                 | MML <ul style="list-style-type: none"><li>Only for sloping roof windows.</li></ul>                                            | MHL top                |
| SSS                                                                                                                | MSL                                                                                                                | MML                                                                                                                           | MHL                    |
| SSS                                                                                                                | MSI                                                                                                                | –                                                                                                                             | –                      |
| –                                                                                                                  | –                                                                                                                  | –                                                                                                                             | MHL top<br>MAD bottom  |

## Mounting accessories

**ZOZ 246**  
Solar kit for solar shutter SSL and solar Anti-heat blinds SSS or MSL. For installation on solar roof windows.

See more on page 149.

**ZOZ 229S**  
Mounting kit for electric Anti-heat blinds MML. For installation on VELUX electric top-hung roof window GPU.

Note: The usage of the mounting kit reduces the blackout effect of the Anti-heat blackout blind SSS.

## Installation advice

Anti-heat blackout shutters can be installed on vertically connected roof windows with a minimum distance of 250mm. On roof windows next to each other a minimum distance of 100mm is required.

Electric Anti-heat blinds can be installed on vertically connected roof windows with a minimum distance of 250mm. On roof windows next to each other a minimum distance of 18mm is required.

# Glazing options

VELUX glazing includes premium safety features as standard on all panes to ensure the highest quality. Safety lamination means that if the glass accidentally breaks, it won't fall into the room - keeping you and your family safe.

No two homes are alike, which is why we offer a range of glazing options to suit the precise needs of each installation.

- Good  
Very good  
Excellent  
Best

### Standard glazing

### Special glazing

|                                                                                                          | Comfort<br>Glazing 70 | Recommended<br>Better comfort<br>Glazing 68 | Well-being comfort<br>Glazing 66 | The best experience<br>Glazing 67 | Better comfort<br>Glazing 15 |  | <br>Heat protection<br>Glazing 69 | <br>Noise reduction<br>Glazing 62 | <br>Extra security<br>Glazing 70Q |
|----------------------------------------------------------------------------------------------------------|-----------------------|---------------------------------------------|----------------------------------|-----------------------------------|------------------------------|--|----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| Technical values and information                                                                         |                       |                                             |                                  |                                   |                              |  |                                                                                                                      |                                                                                                                      |                                                                                                                      |
| Thermal transmittance window/<br>Energy performance                                                      | Uw 1.3<br>●●          | Uw 1.1<br>●●●                               | Uw 1.0<br>●●●                    | Uw 0.77-0.88<br>●●●●              | Uw 1.1<br>●●●                |  | Uw 1.1<br>●●●                                                                                                        | Uw 0.92 - 1.0<br>●●●●                                                                                                | Uw 1.3<br>●●                                                                                                         |
| Thermal transmittance glazing                                                                            | Ug 1.0<br>●●●         | Ug 0.7<br>●●●●                              | Ug 0.6<br>●●●●                   | Ug 0.4<br>●●●●                    | Ug 0.7<br>●●●●               |  | Ug 0.6<br>●●●●                                                                                                       | Ug 0.5<br>●●●●                                                                                                       | Ug 1.0<br>●●●                                                                                                        |
| Light transmittance                                                                                      | τ 0.68<br>●●          | τ 0.68<br>●●                                | τ 0.62<br>●●                     | τ 0.62<br>●●                      | τ 0.68<br>●●                 |  | τ 0.57<br>●●●●                                                                                                       | τ 0.68<br>●●●                                                                                                        | τ 0.68<br>●●●                                                                                                        |
| Solar energy transmittance/<br>Heat protection                                                           | g 0.46<br>●●●         | g 0.49<br>●●●                               | g 0.44<br>●●●                    | g 0.44<br>●●●                     | g 0.50<br>●●●                |  | g 0.27<br>●●                                                                                                         | g 0.47<br>●●                                                                                                         | g 0.45<br>●●                                                                                                         |
| Sound insulation                                                                                         | 35 dB<br>●●●          | 35 dB<br>●●●                                | 37 dB<br>●●●                     | 38 dB<br>●●●                      | 35 dB<br>●●●                 |  | 35 dB<br>●●●                                                                                                         | 42 dB<br>●●●●                                                                                                        | 35 dB<br>●●●                                                                                                         |
| Layers of glass                                                                                          | 2                     | 3                                           | 3                                | 3                                 | 3                            |  | 3                                                                                                                    | 3                                                                                                                    | 2                                                                                                                    |
| Glass component                                                                                          | 33.2-16-4             | 33.2-13-3-13-4                              | 33.2-13-3-13-4                   | 33.2-12-3-12-4                    | 33.2-13-3-13-4               |  | 33.2-13-3-13-4                                                                                                       | 33.2-11-3-11-8                                                                                                       | 33.4-16-4                                                                                                            |
| Gas type                                                                                                 | Argon                 | Argon                                       | Argon                            | Krypton                           | Argon                        |  | Argon                                                                                                                | Krypton                                                                                                              | Argon                                                                                                                |
| Premium features                                                                                         |                       |                                             |                                  |                                   |                              |  |                                                                                                                      |                                                                                                                      |                                                                                                                      |
|  Rain noise reduction | ✓                     | ✓                                           | ✓                                | ✓                                 | ✓                            |  | ✓                                                                                                                    | ✓                                                                                                                    |                                                                                                                      |
|  Safety lamination    | ✓                     | ✓                                           | ✓                                | ✓                                 | ✓                            |  | ✓                                                                                                                    | ✓                                                                                                                    | ✓                                                                                                                    |
|  Toughened glass      | ✓                     | ✓                                           | ✓                                | ✓                                 | ✓                            |  | ✓                                                                                                                    | ✓                                                                                                                    | ✓                                                                                                                    |
|  UV filter            | ✓                     | ✓                                           | ✓                                | ✓                                 | ✓                            |  | ✓                                                                                                                    | ✓                                                                                                                    | ✓                                                                                                                    |
| Premium plus features                                                                                    |                       |                                             |                                  |                                   |                              |  |                                                                                                                      |                                                                                                                      |                                                                                                                      |
|  Easy-to-clean        |                       |                                             | ✓                                | ✓                                 |                              |  |                                                                                                                      |                                                                                                                      |                                                                                                                      |
|  Anti-dew             |                       |                                             | ✓                                | ✓                                 |                              |  |                                                                                                                      | ✓                                                                                                                    |                                                                                                                      |

### Premium features comes on all standard glazing



**Rain noise reduction**  
Unique sound dampening foil for undisturbed sleep during rainy days or nights.



**Safety lamination**  
Prevents glass from falling into the room in case of accidental breakage.



**Toughened glass**  
Adds strength to the outer pane to protect from wayward balls and extreme weather such as heavy storms and hail.



**UV filter**  
Protects the interior furnishings from fading due to the sun's harmful UV rays.

### Premium plus features comes on selected glazing



**Easy-to-clean**  
Dirt-repellent coating lets rain wash off most of the dirt.



**Anti-dew**  
Hydrophobic coating reduces the amount of dew that can form on the outside for a clearer view.



Scan to watch the short product videos.



# Roof window replacement

Replacing a VELUX roof window is easier than you think. It can be done in as little as 4 hours, and it allows for improved energy efficiency, a better indoor climate and more daylight and fresh air.

- Same standard VELUX sizes available.
- Usually fitted quickly and easily from the inside.
- Minimal mess and disruption to internal finish.

## How to locate the roof window type and size

The same standard sizes are still available today and there are plenty of opportunities for upgrading. Flashing for replacements can be found on page 78.

For advice on what type of operation and finish of roof window to select, go to page 20.

Upgrading your old roof windows couldn't be easier with the VELUX Installation Service [velux.co.uk/installation](http://velux.co.uk/installation)



From 2014

Type Size

From 2001-2013

Type Size

From 1992-2000

Type Size

Before 1992

Type Size

| Window codes                   |      |      |      |      |      |      |      |      |      |      |
|--------------------------------|------|------|------|------|------|------|------|------|------|------|
| Replace with: Since 2014 (V22) | CK01 | CK02 | CK04 | MK04 | MK06 | MK08 | SK06 | SK08 | UK04 | UK08 |
| From 2001 to 2013 (V21)        | C01  | C02  | C04  | M04  | M06  | M08  | S06  | S08  | U04  | U08  |
| From 1992 to 2000 (VES)        | 101  | 102  | 104  | 304  | 306  | 308  | 606  | 608  | 804  | 808  |
| Before 1992 (VKI)              | 9    |      | 6    | 1    | 14   | 2    | 4    | 10   | 7    | 8    |





Size guide

Looking to replace your existing VELUX roof window? Use the size guide to locate your current window code and the replacement code.

Using our size guide

VELUX current size code

VELUX roof window type

VELUX older generation roof window size code

MK06

GGL  
GPL  
GGU  
GPU

14  
306  
M06

| Roof windows                 |                                      |                                      |                                        |                                             |                                            |                                             |                                            |
|------------------------------|--------------------------------------|--------------------------------------|----------------------------------------|---------------------------------------------|--------------------------------------------|---------------------------------------------|--------------------------------------------|
| External frame sizes (w×h)mm |                                      |                                      |                                        |                                             |                                            |                                             |                                            |
|                              | 472                                  | 550                                  | 660                                    | 780                                         | 942                                        | 1140                                        | 1340                                       |
| 550                          |                                      |                                      |                                        |                                             | PK25<br>GGL 425 P25                        |                                             |                                            |
| 624                          |                                      |                                      |                                        | MK27<br>GGL M27                             |                                            |                                             |                                            |
| 698                          |                                      | CK01<br>9 101<br>GGL C01             |                                        |                                             |                                            | SK01<br>GGL 601 GBL S01                     |                                            |
| 778                          |                                      | CK02<br>GGL 102<br>GGU C02           |                                        |                                             |                                            |                                             |                                            |
| 978                          | BK04<br>GGL<br>GPL<br>GGU<br>GBL 804 | CK04<br>6 104<br>GPU C04             | FK04<br>GGL 204<br>GGU F04             | MK04<br>GGL<br>GPL<br>GPU<br>GBL 304 M04    | PK04<br>GGL 31<br>GPL 404<br>GBL P04       |                                             | UK04<br>GGL<br>GPL<br>GGU 804 U04          |
| 1178                         |                                      | CK06<br>GGL<br>GPL<br>GGU<br>GPU C06 | FK06<br>GGL (5)*<br>GGU 206<br>GPU F06 | MK06<br>GGL<br>GPL<br>GPU<br>GBL 14 306 M06 | PK06<br>GGL<br>GPL<br>GGU<br>GPU 406 P06   | SK06<br>GGL<br>GPL<br>GGU<br>GPU 4 606 S06  | UK06<br>GGL                                |
| 1398                         |                                      |                                      | FK08<br>GGL<br>GPL<br>GGU<br>GPU F08   | MK08<br>GGL<br>GPL<br>GPU<br>GBL 2 308 M08  | PK08<br>GGL<br>GPL<br>GGU<br>GPU 408 P08   | SK08<br>GGL<br>GPL<br>GGU<br>GPU 10 608 S08 | UK08<br>GGL<br>GPL<br>GGU<br>GPU 8 808 U08 |
| 1600                         |                                      |                                      |                                        | MK10<br>GGL<br>GPL<br>GGU<br>GPU 13 310 M10 | PK10<br>GGL<br>GPL<br>GGU<br>GPU 3 410 P10 | SK10<br>GGL<br>GPL<br>GGU<br>GPU 610 S10    | UK10<br>GGL<br>GPL<br>GGU 810 U10          |
| 1800                         |                                      |                                      |                                        | MK12<br>GGL 312 M12                         |                                            |                                             |                                            |

\* GGL 5 is 700mm wide

| Sloping extension elements   |     |     |             |                            |                            |                            |                            |
|------------------------------|-----|-----|-------------|----------------------------|----------------------------|----------------------------|----------------------------|
| External frame sizes (w×h)mm |     |     |             |                            |                            |                            |                            |
|                              | 472 | 550 | 660         | 780                        | 942                        | 1140                       | 1340                       |
| 920                          |     |     | FK34<br>GIU | MK34<br>GIL 334 M34<br>GIU | PK34<br>GIL 434 P34<br>GIU | SK34<br>GIL 634 S34<br>GIU | UK34<br>GIL 834 U34<br>GIU |

3in1 roof windows


| External frame sizes (w×h) mm |                        |   |  |
|-------------------------------|------------------------|---|--|
|                               | 1880                   |   |  |
| 1178                          | FFKF06<br>GGLS<br>GPLS | * |  |
| 1398                          | FFKF08<br>GGLS<br>GPLS | * |  |

\* Fixed element – seen from the inside.


Cold room roof windows

| External frame sizes (w×h)mm |     |            |
|------------------------------|-----|------------|
|                              | 460 | 540        |
| 610                          | GVK |            |
| 830                          |     | 103<br>GVT |


Flat roof sun tunnel Ø 350



Sun tunnel Ø 350



Sun tunnel Ø 250



Heritage conservation roof windows

External frame sizes (w x h)mm. When installing, additional 20mm are required around the frame for the pre-installed insulation material

|      | 550         | 660         | 780         | 942         | 1140        |
|------|-------------|-------------|-------------|-------------|-------------|
| 978  | CC04<br>GCL |             |             |             |             |
| 1178 | CC06<br>GCL | FC06<br>GCL | MC06<br>GCL |             |             |
| 1398 |             | FC08<br>GCL | MC08<br>GCL | PC08<br>GCL | SC08<br>GCL |
| 1600 |             |             |             |             | SC10<br>GCL |

Roof balcony

External frame sizes (w×h)mm

|      | 780            | 942            | 1140           |
|------|----------------|----------------|----------------|
| 2520 | MK19<br>(MK10) | PK19<br>(PK10) | SK19<br>(SK10) |
|      | (MK34)         | (PK34)         | (SK34)         |

Roof terrace

External frame sizes (w×h)mm

|      | 780                    |
|------|------------------------|
| 1360 | M08<br>GEL 308         |
| 1090 | M35<br>VEA VEB VEC 335 |

Dormer

External frame sizes (w×h) mm

|      | 1680     | 2000     | 2400     | 2480        |
|------|----------|----------|----------|-------------|
| 2670 | MK06 Duo | PK06 Duo | SK06 Duo | MK06 Triple |



FSC® certification supports good forest management where the health and safety of forest workers is secured and forest wildlife is well looked after.



Flat roof windows

Available sizes (wxh)mm

|      | 600                                     | 800                                     | 900                                     | 1000                                               | 1200                                               | 1500                                    | 2000                         |
|------|-----------------------------------------|-----------------------------------------|-----------------------------------------|----------------------------------------------------|----------------------------------------------------|-----------------------------------------|------------------------------|
| 600  | 060060<br>CFP CVP<br>CFJ CVJ<br>CFU CVU |                                         | 090060<br>CFJ CVJ<br>CFU CVU            |                                                    |                                                    |                                         | 200060<br>CFU CVU            |
| 800  |                                         | 080080<br>CFP CVP<br>CFJ CVJ<br>CFU CVU |                                         |                                                    |                                                    | 150080<br>CFU CVU                       |                              |
| 900  | 060090<br>CFP CVP                       |                                         | 090090<br>CFP CVP<br>CFJ CVJ<br>CFU CVU |                                                    | 120090<br>CFJ CVJ<br>CFU CVU                       |                                         |                              |
| 1000 |                                         |                                         |                                         | 100100<br>CFP CVP<br>CXP CSP<br>CFJ CVJ<br>CFU CVU |                                                    | 150100<br>CFJ CVJ<br>CFU CVU            | 200100<br>CFJ CVJ<br>CFU CVU |
| 1200 |                                         |                                         | 090120<br>CFP CVP<br>CXP                |                                                    | 120120<br>CFP CVP<br>CXP CSP<br>CFJ CVJ<br>CFU CVU | 150120<br>CFU CVU                       |                              |
| 1500 |                                         |                                         |                                         | 100150<br>CFP CVP                                  |                                                    | 150150<br>CFP CVP<br>CFJ CVJ<br>CFU CVU |                              |

Base unit height 150mm: CFP, CVP, CXP, CSP, CFU, CVU, CFJ, CVJ  
Base unit height 300mm: CFJ, CVJ  
Base unit height 500mm: CFJ, CVJ  
CFJ and CVJ 200100 only have a base unit height of 150mm

Vertical elements

External frame sizes (wxh)mm

|      | 780                                             | 942                                    | 1140                           | 1340                          |
|------|-------------------------------------------------|----------------------------------------|--------------------------------|-------------------------------|
| 601  | MK31<br>VFE 1/2-60<br>331<br>VIU M31            | PK31<br>VFE 431<br>3-60 P31            | SK31<br>VFE 631<br>4/10-60 S31 | UK31<br>VFE 831<br>7/8-60 U31 |
| 955  | MK35<br>VFE<br>VFA 1/2-95<br>VFB 334<br>VIU M34 | PK35<br>VFE<br>VFA 434<br>VFB 3-95 P34 | SK35<br>VFE 634<br>4/10-95 S34 | UK35<br>VFE 834<br>7/8-60 U34 |
| 1155 | MK36<br>1/2-115<br>VFE 336<br>VIU M36           | PK36<br>VFE 436<br>VIU P36             | SK36<br>VFE 636<br>VIU S36     | UK36<br>VFE<br>VIU            |
| 1375 | MK38<br>VFE 338<br>VIU M38                      | PK38<br>VFE 438<br>VIU P38             | SK38<br>VFE 638<br>VIU S38     | UK38<br>VFE<br>VIU            |

VELUX Company Ltd  
Woodside Way  
Glenrothes  
Fife  
Scotland  
KY7 4ND

Tel: 01592 778 225

Email: sales@velux.co.uk  
Website: velux.co.uk

-  facebook.com/VELUXGBI
-  pinterest.com/VELUXGBI
-  instagram.com/veluxpro\_gbi



VELUX RESERVE THE RIGHT TO PRINTING MISTAKES AND ERRORS IN THIS CATALOGUE