VELUX blinds ROF (translucent roller blind RFL and awning blind MHL)



3 Year Guarantee

Get two products in one package for light dimming and heat protection. The VELUX translucent roller blind delivers flexible control over incoming daylight. The stepless design allows you to raise or lower the blind to where you want to match your personal need for incoming daylight or privacy in rooms where total blackout is not needed. The VELUX awning blind blocks the sun's rays before they hit the glazing and helps keep your room cool with effective heat protection on warm, sunny days. Both products are easily installed from the inside, and fit perfectly with your VELUX roof windows.


- Heat protection keeps your room cool and increases indoor comfort.
- Increase your privacy, reduce unwanted glare and control incoming sunlight exactly as you like.
- Install in minutes - simply click on the blind in the pre-fitted brackets.
- Slimmest profile design on the market lets more natural light in.
- Manually operated blinds are a great choice for windows that are within reach.
- Maintenance-free design delivers peace of mind for the lifetime of your product.
- Built to last, the wind-resistant awning blind has been strength-tested in our testing facilities.
- Standard 100 by OEKO-TEX® certification guarantees the product is made without harmful substances.

CE

DSP Interior blinds en-GB - Approved
Creation date 27-10-2026 21:07:48

Colours and patterns

VELUX interior blinds are available in a wide range of colours and designs. However, a few blind variants are only available in a limited range of colours. Each colour and design option has a unique code. Add the code of your choice to the relevant blind type when ordering your products.

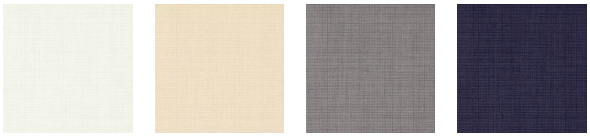

1028 1086 4161 9050

Operation guidance

RFL:
The roller blind can be raised and lowered manually with a control bar, which can be set in any position.
MHL:
The awning blind can either be rolled fully up or fully down. To roll down the awning blind, rotate the window 180° and fit the awning blind on the hooks on the outside of the bottom sash. When closing the window, the awning blind is automatically rolled out. To roll up the awning blind, rotate the window 180° and detach the awning blind from the hooks.

Further information

We reserve the right to make technical changes.

For more information on our products, please visit https://www.velux.co.uk or https://www.velux.ie.

Creation date 27-10-2026 21:07:48