





BFX 1000




VELUX®

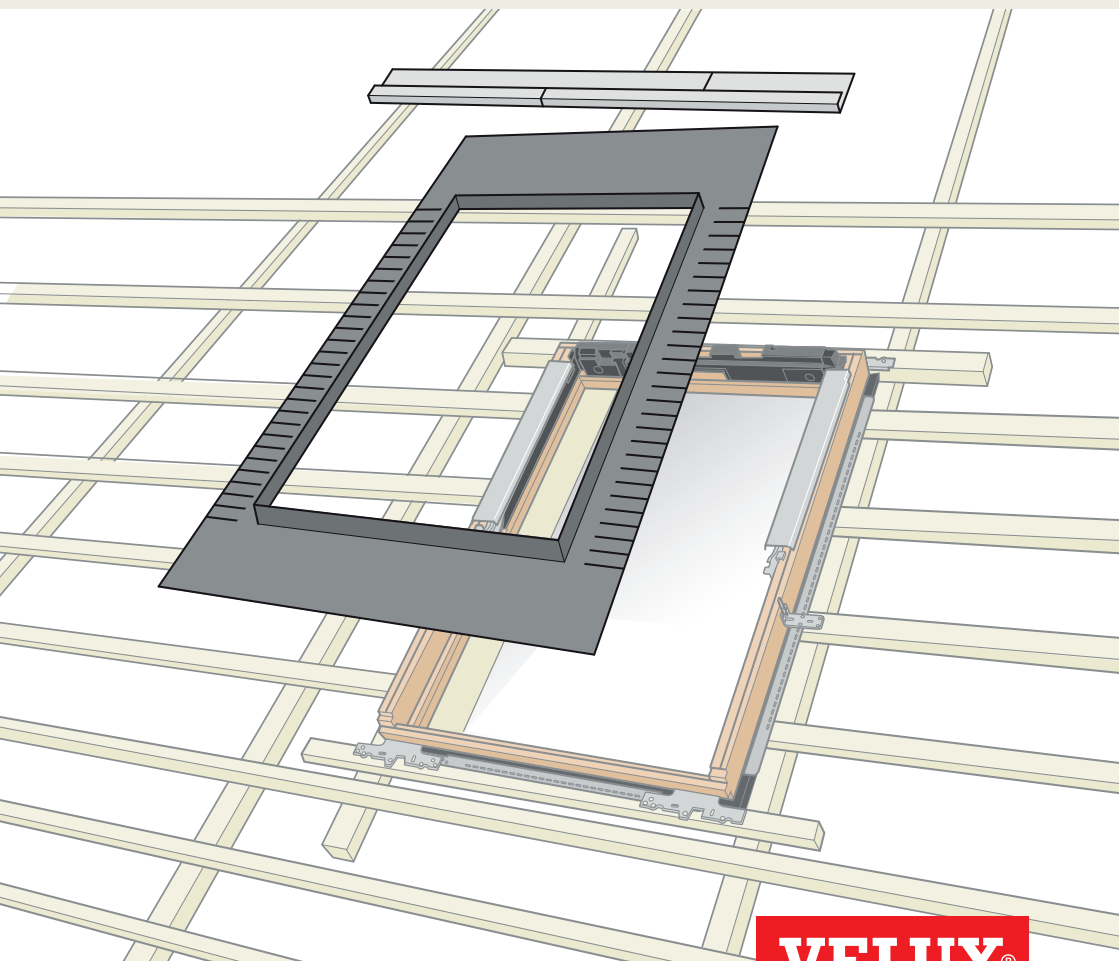


VAS 453298-2025-09

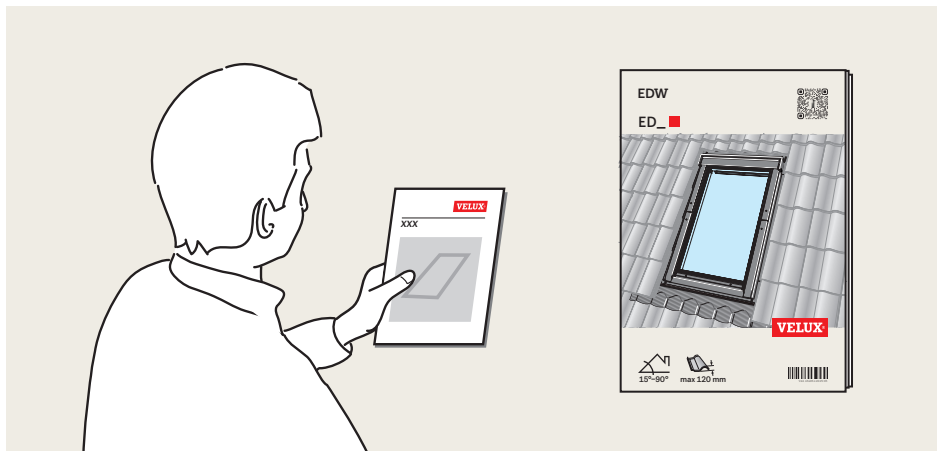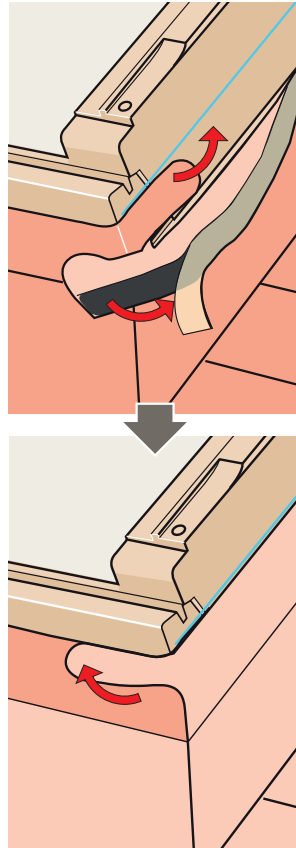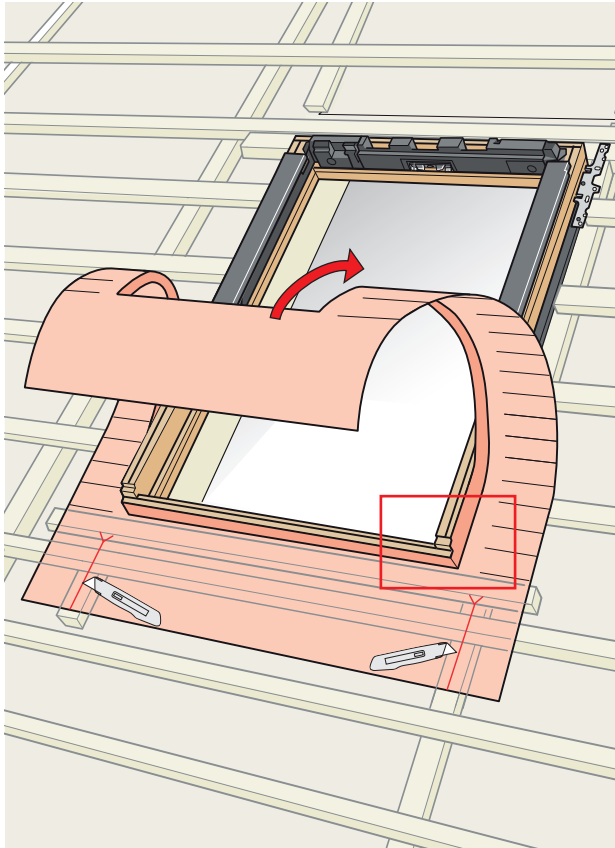

 13	
EN 13859-1:2014 Notified body: 0338	
BFX	
Flexible sheet for underlays for roofs	
Reaction to fire: Resistance to water penetration: - before artificial ageing: - after artificial ageing: Tensile strength in longitudinal direction: - before artificial ageing: - after artificial ageing: Tensile strength in transverse direction: - before artificial ageing: - after artificial ageing: Elongation in longitudinal direction: - before artificial ageing: - after artificial ageing: Elongation in transverse direction: - before artificial ageing: - after artificial ageing: Tear resistance: - longitudinal direction: - transverse direction: Flexibility at low temperature (pliability): Artificial ageing behavior, concerning: - resistance to water penetration: - tensile strength:	Class E Class W1 Class W1 200 N/50 mm 120 N/50 mm 200 N/50 mm 120 N/50 mm NPD NPD NPD NPD NPD NPD NPD NPD
VELUX A/S Ådalsvej 99 DK-2970 Hørsholm www.velux.com/ce	

VELUX®

www.velux.com



velux.com/contact