







# BFX 1000U
















**VELUX®**

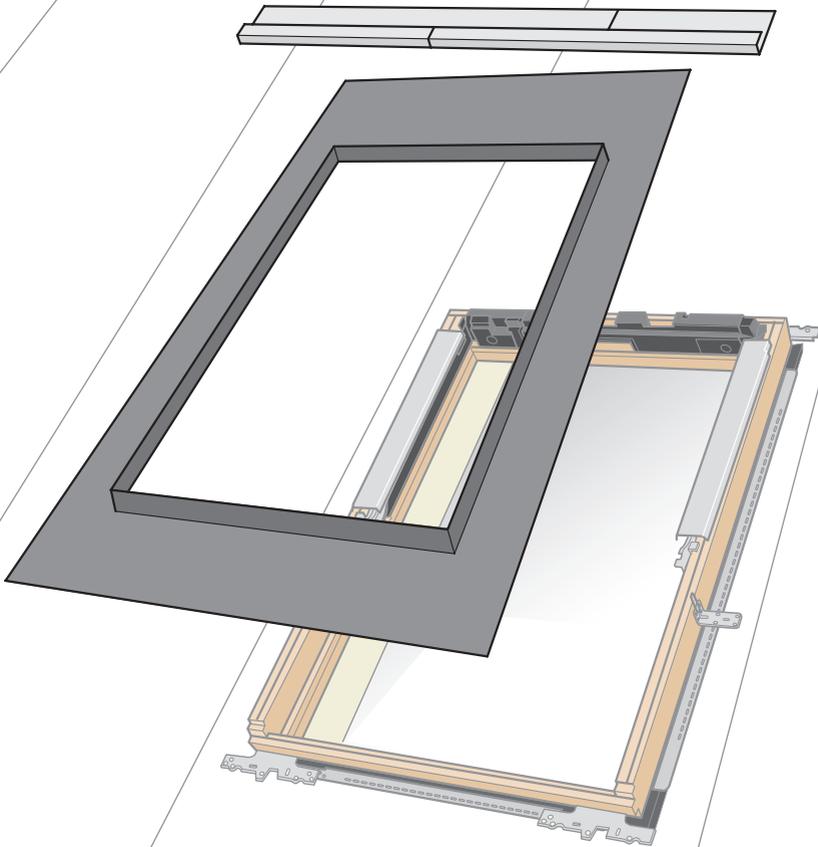

VAS 453492-2025-09

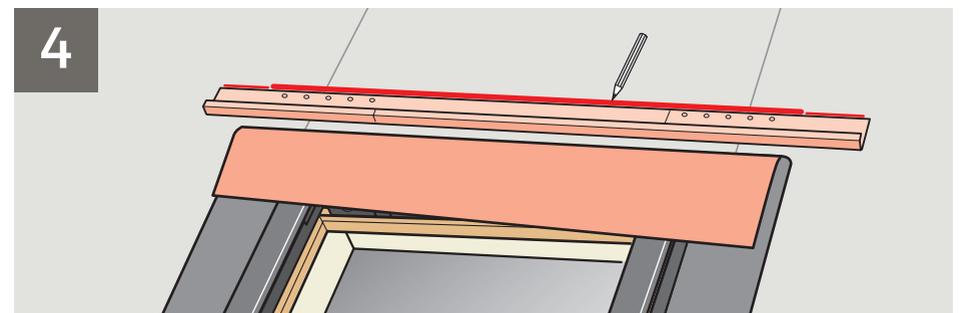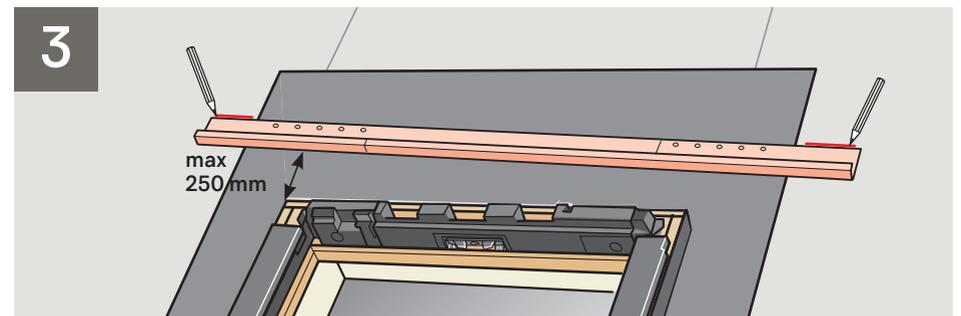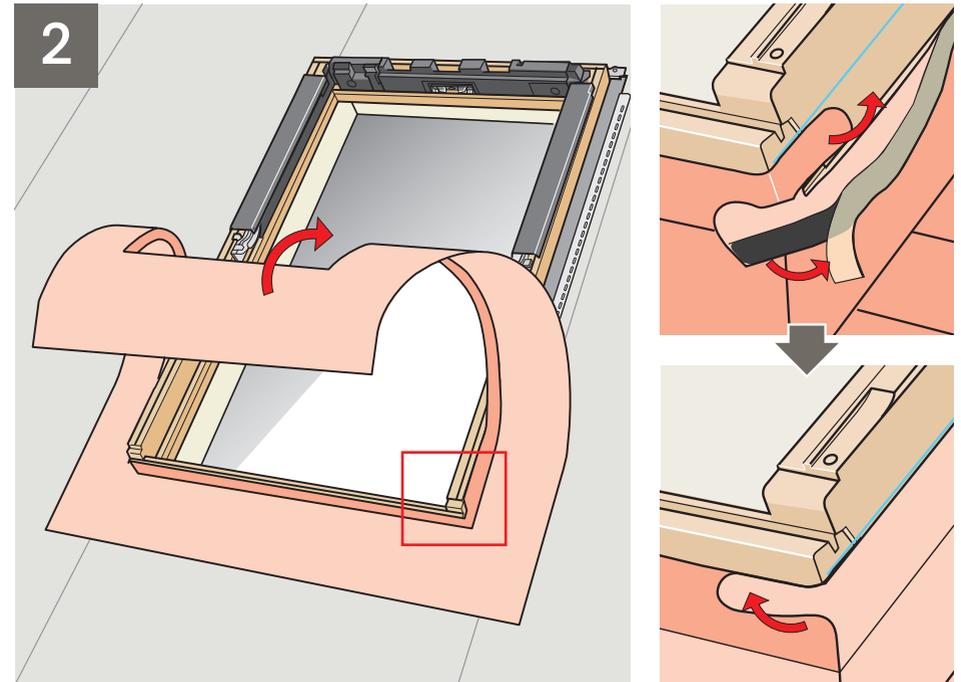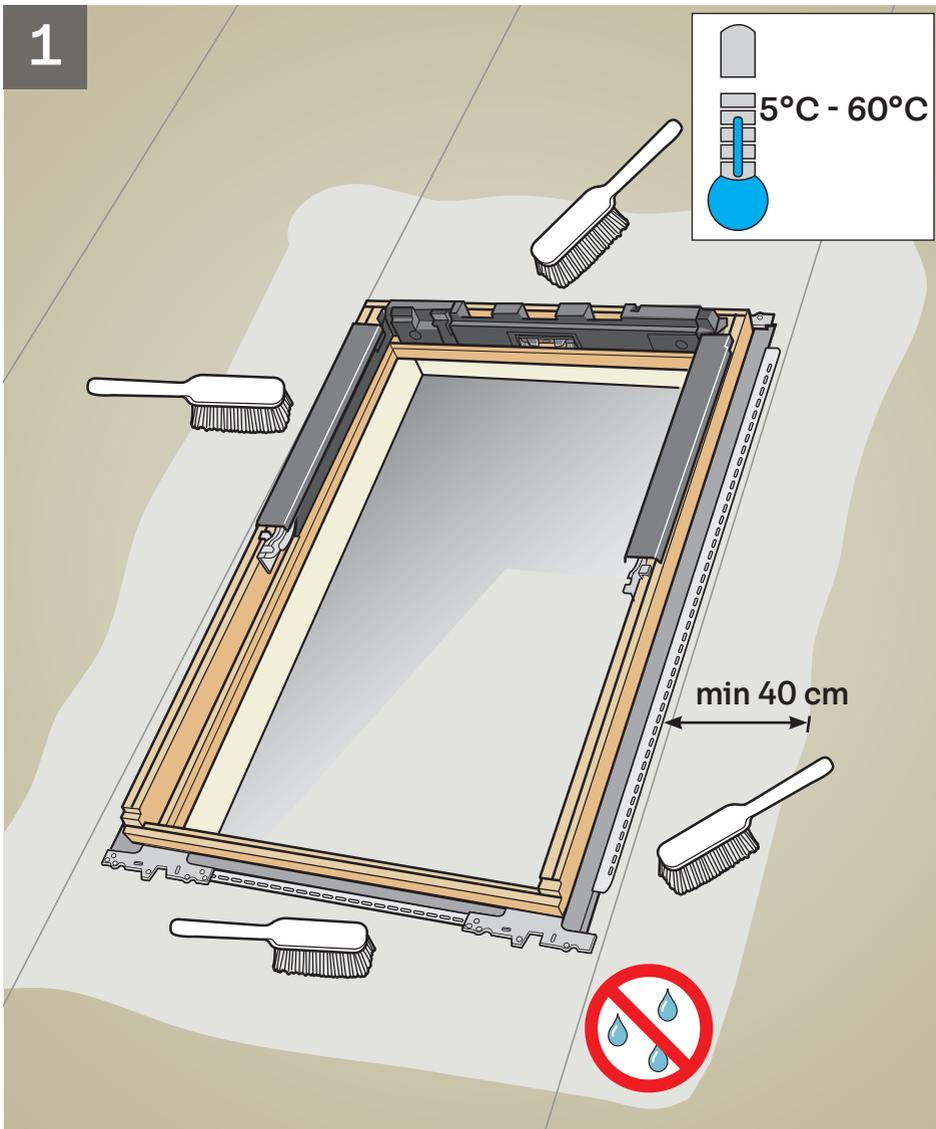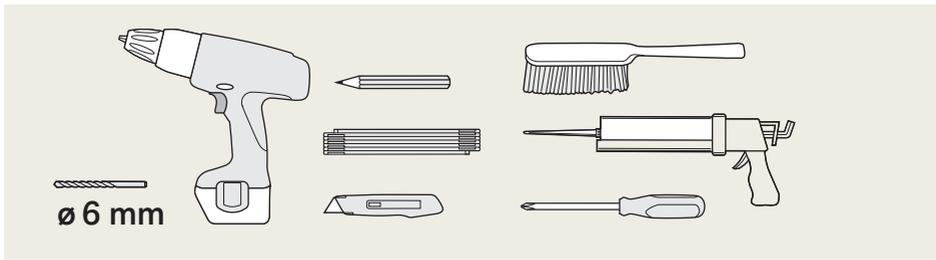

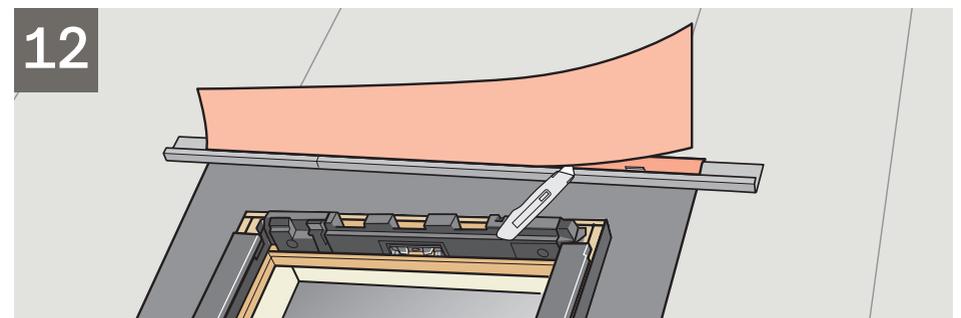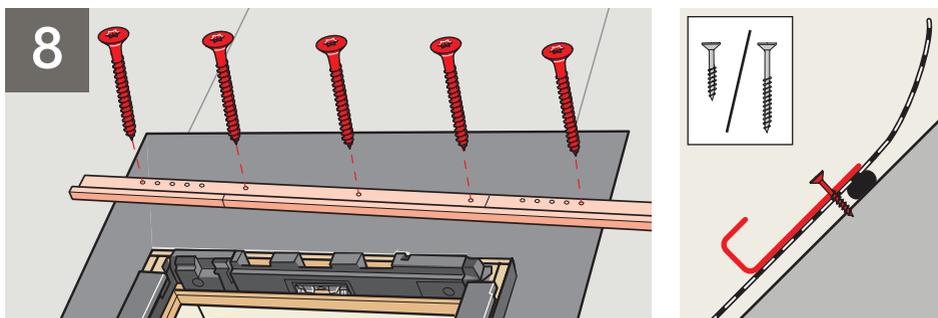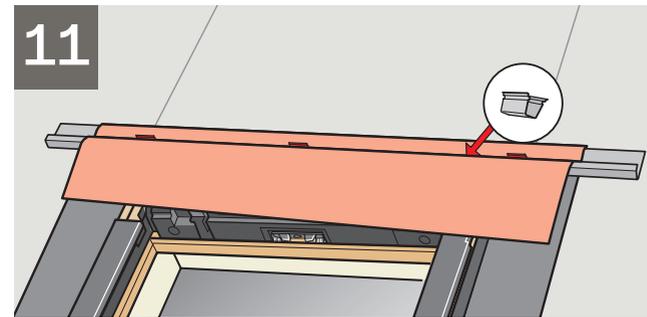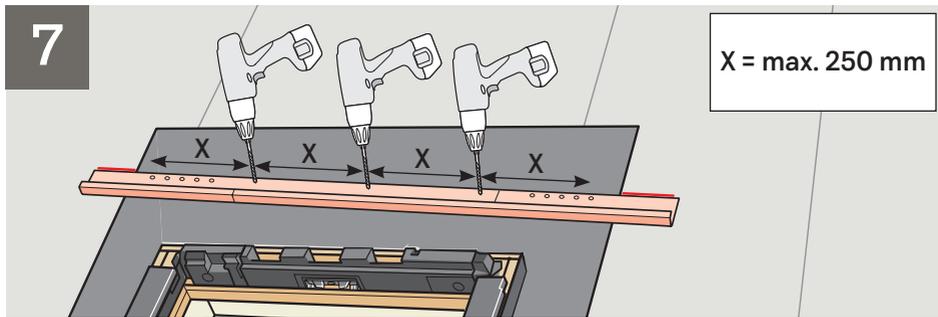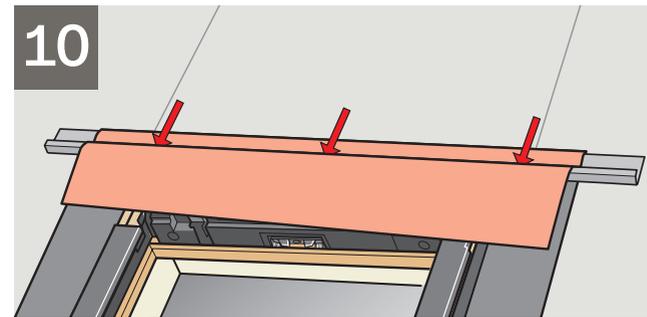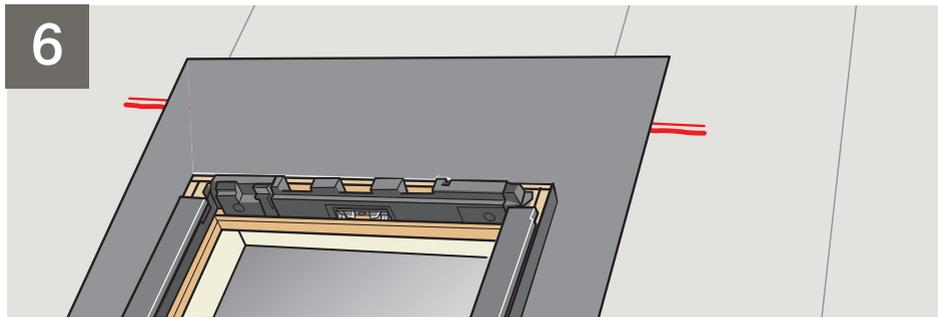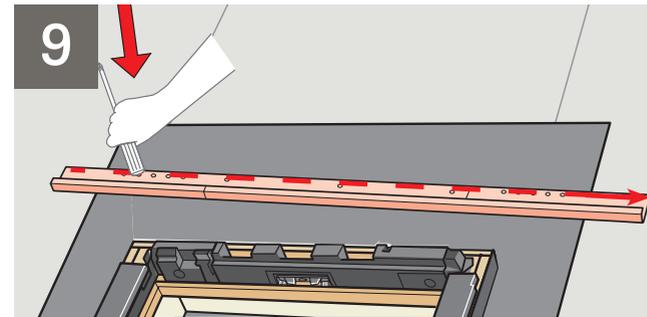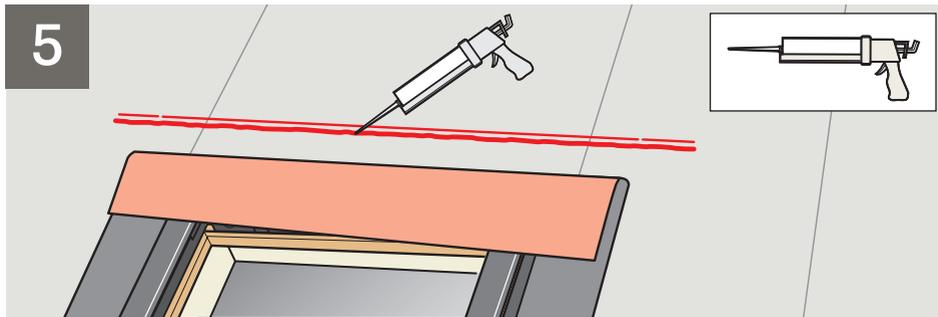


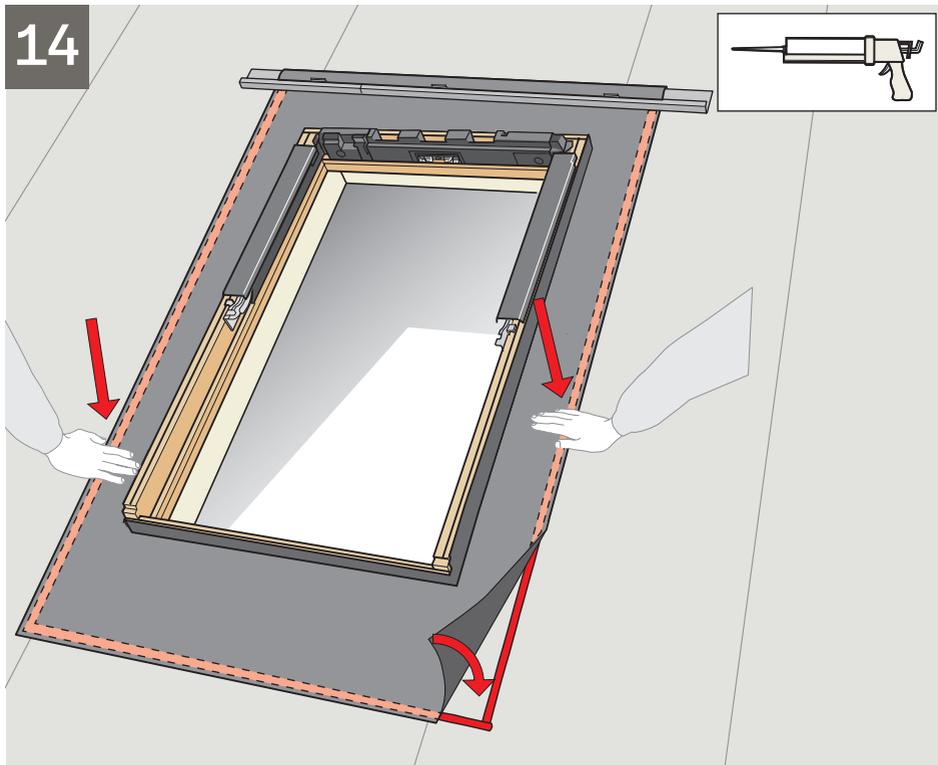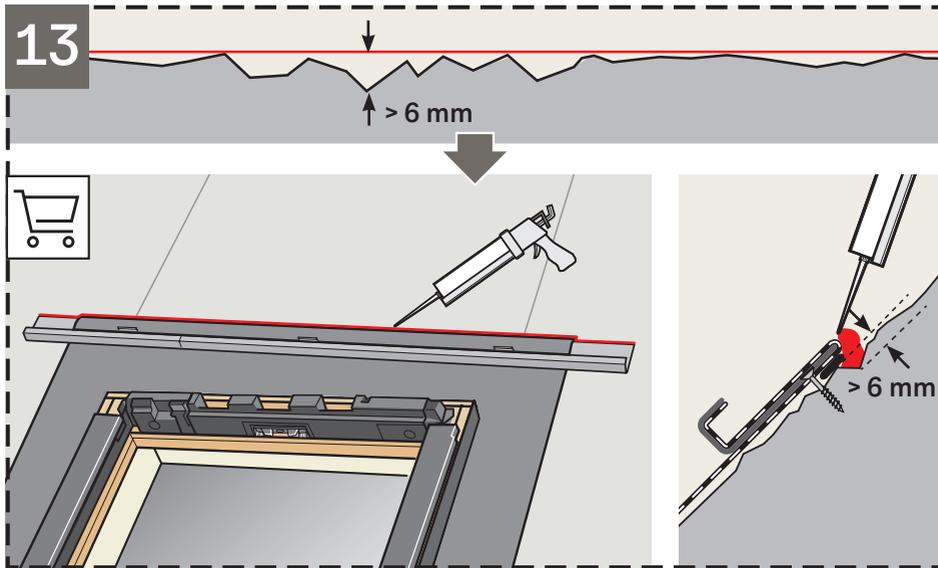

<b>CE</b> 13	
EN 13859-1:2014 Notified body: 0338	
BFX	
Flexible sheet for underlays for roofs	
Reaction to fire:	Class E
Resistance to water penetration:	
- before artificial ageing:	Class W1
- after artificial ageing:	Class W1
Tensile strength in longitudinal direction:	
- before artificial ageing:	200 N/50 mm
- after artificial ageing:	120 N/50 mm
Tensile strength in transverse direction:	
- before artificial ageing:	200 N/50 mm
- after artificial ageing:	120 N/50 mm
Elongation in longitudinal direction:	
- before artificial ageing:	NPD
- after artificial ageing:	NPD
Elongation in transverse direction:	
- before artificial ageing:	NPD
- after artificial ageing:	NPD
Tear resistance:	
- longitudinal direction:	NPD
- transverse direction:	NPD
Flexibility at low temperature (pliability):	NPD
Artificial ageing behavior, concerning:	
- resistance to water penetration:	NPD
- tensile strength:	NPD
VELUX A/S Ådalsvej 99 DK-2970 Hørsholm <a href="http://www.velux.com/ce">www.velux.com/ce</a>	



[www.velux.com](http://www.velux.com)



[velux.com/contact](http://velux.com/contact)

INSTALLATION INSTRUCTIONS FOR BFX 1000U. ©2013. ©2013, 2025 VELUX GROUP @VELUX AND THE VELUX LOGO ARE REGISTERED TRADEMARKS USED UNDER LICENSE BY THE VELUX GROUP