
GVR+EDW
Universal

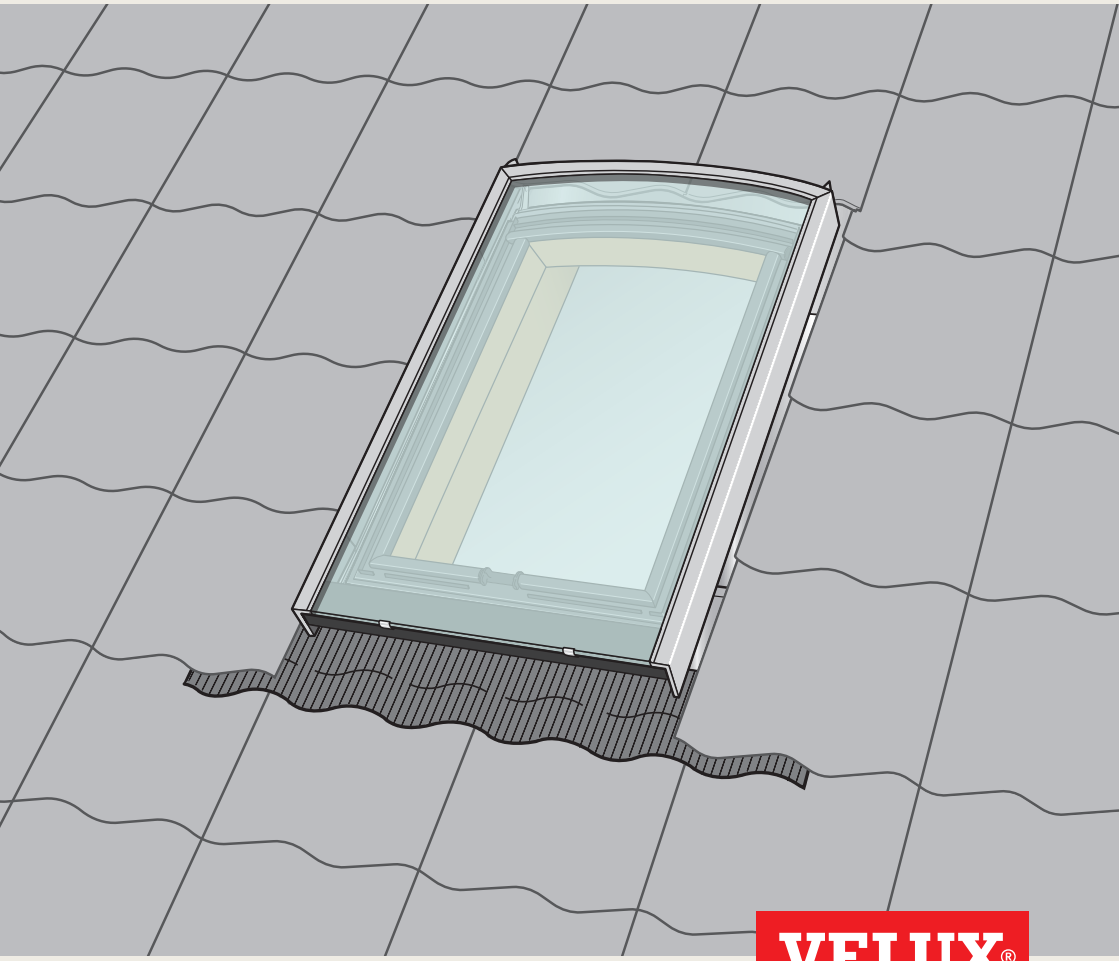


VELUX®


30°–55°

max 120 mm


VAS 454176-2025-10


1

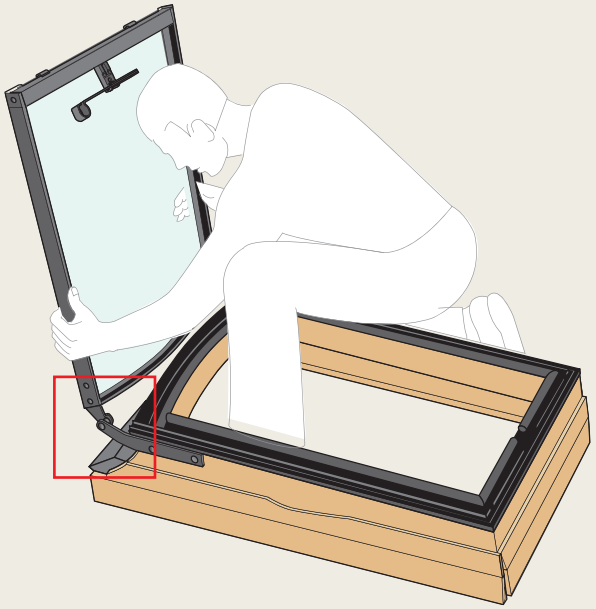


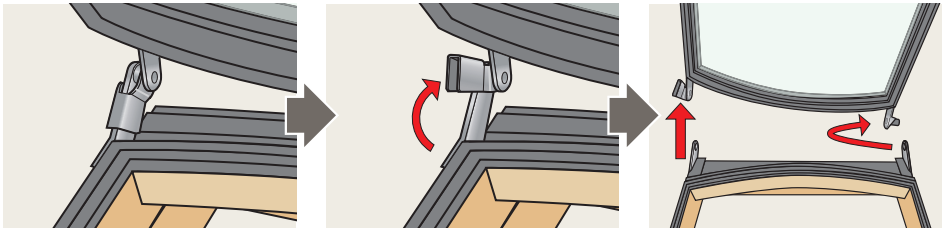


2

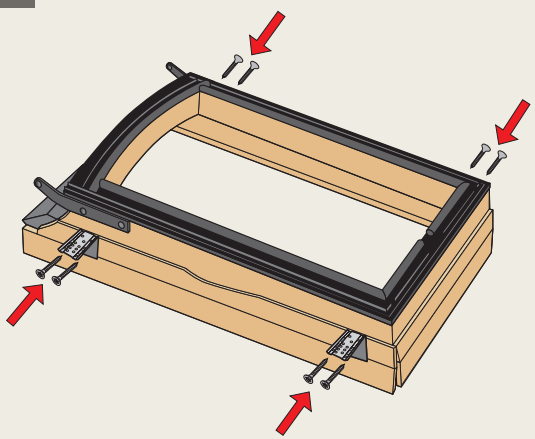


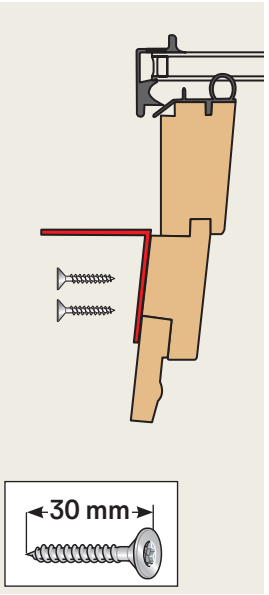

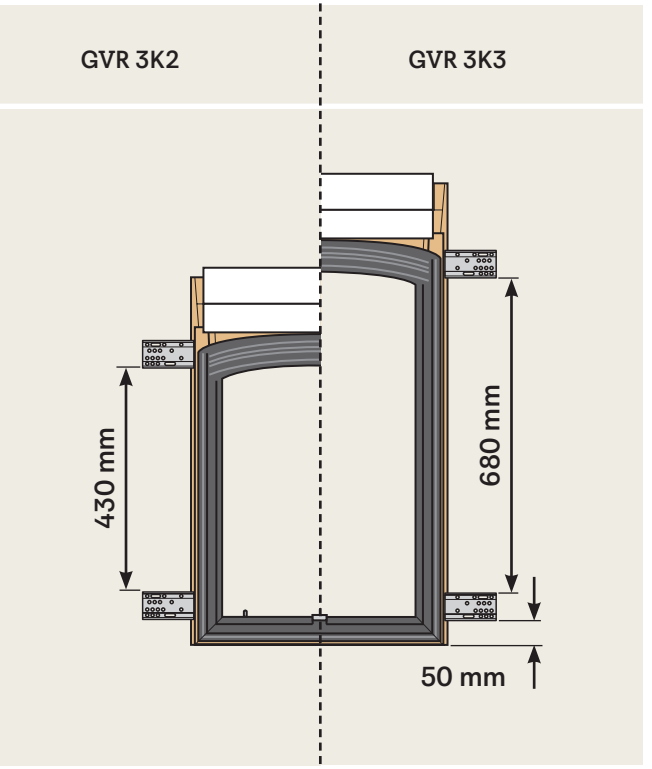


3

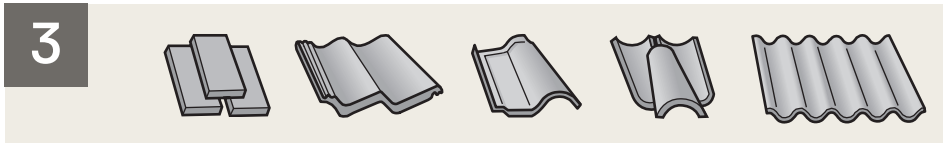


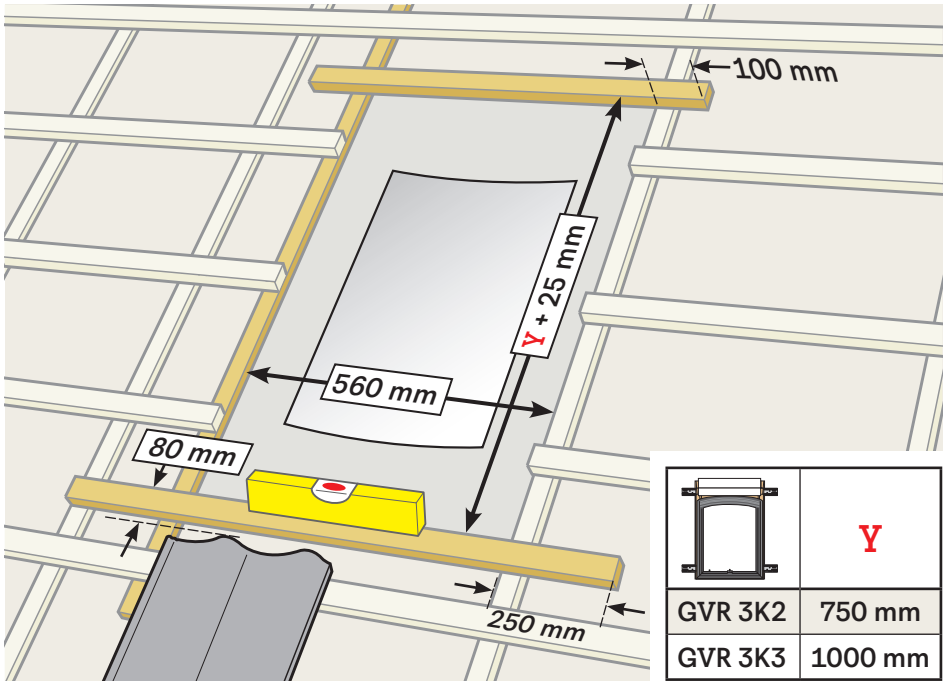


	Y
GVR 3K2	750 mm
GVR 3K3	1000 mm

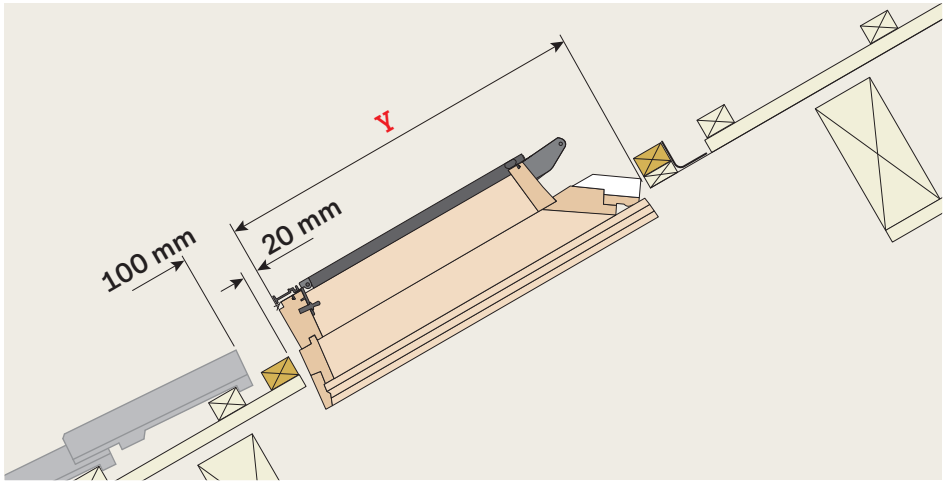



4

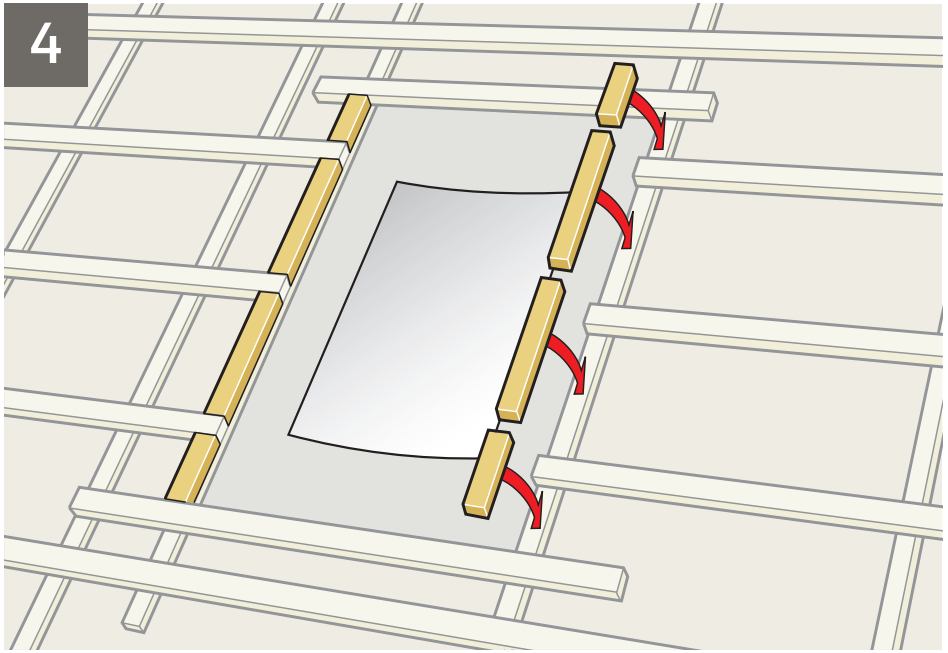



5

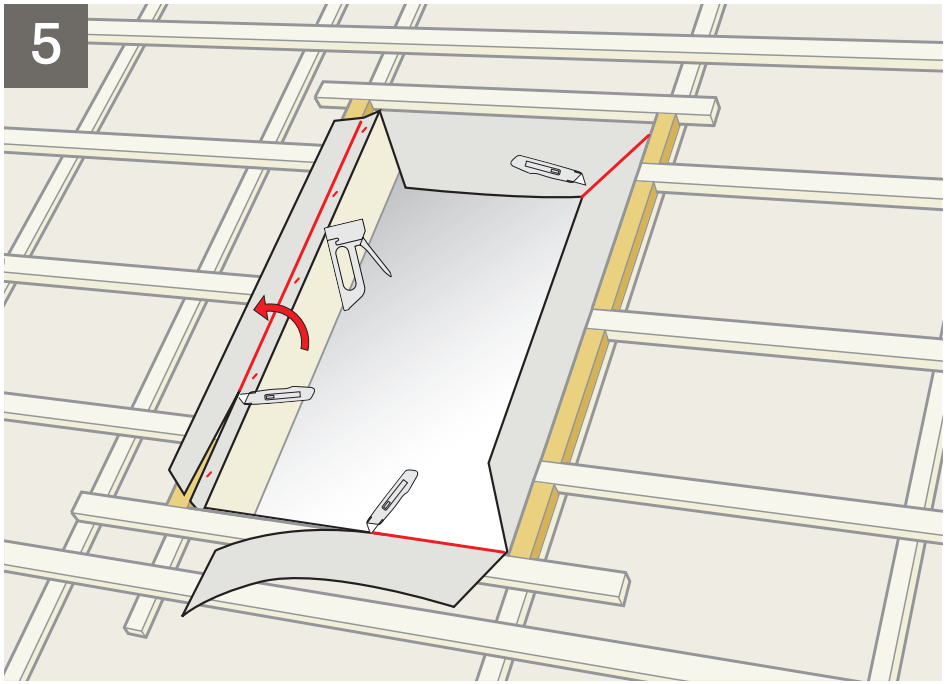

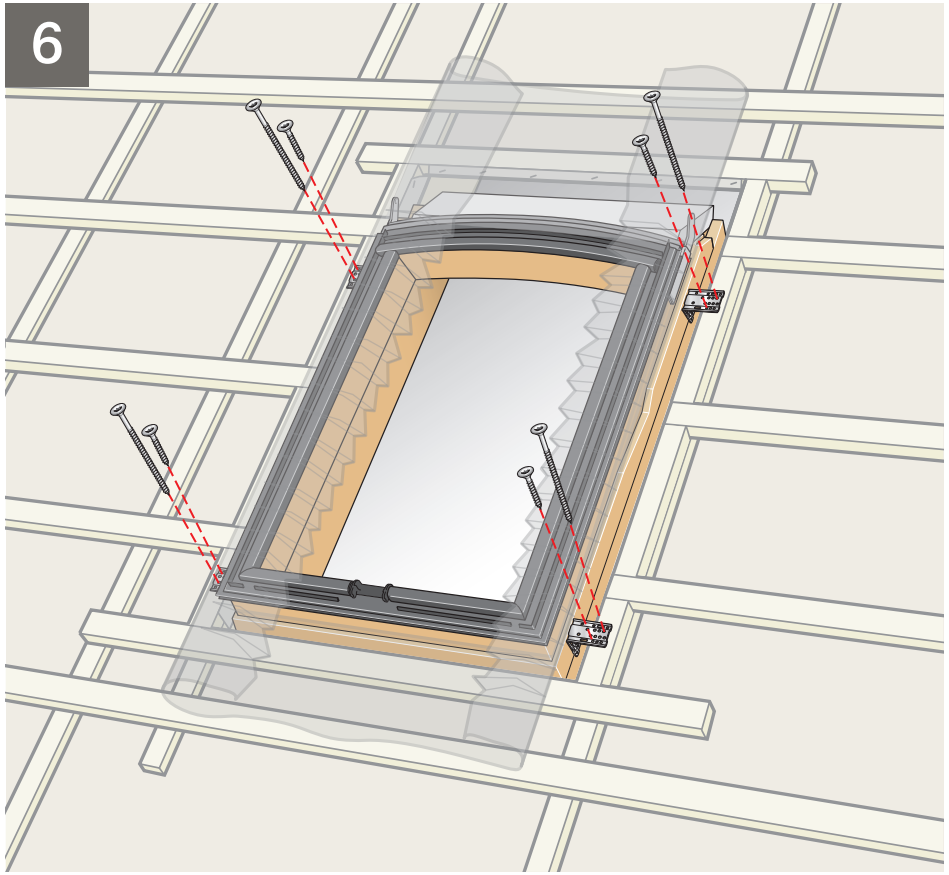

6

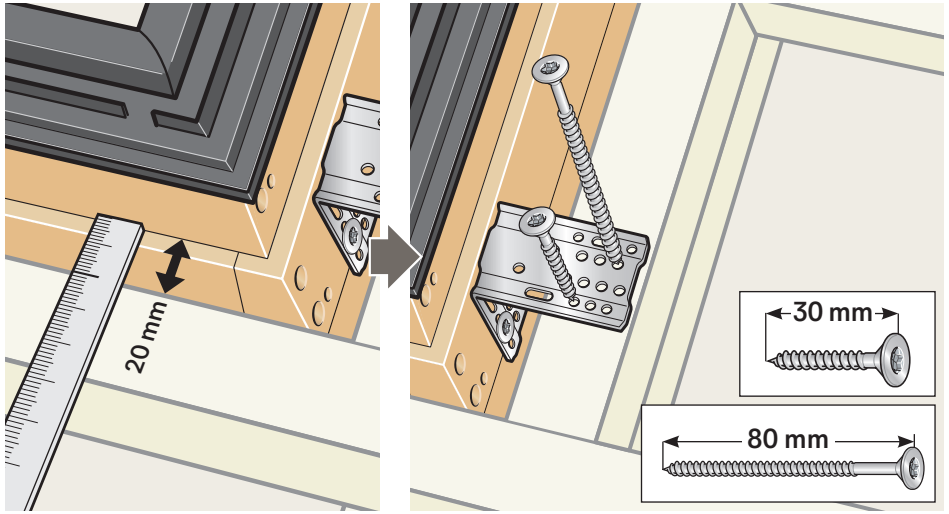
20 mm
30 mm
80 mm

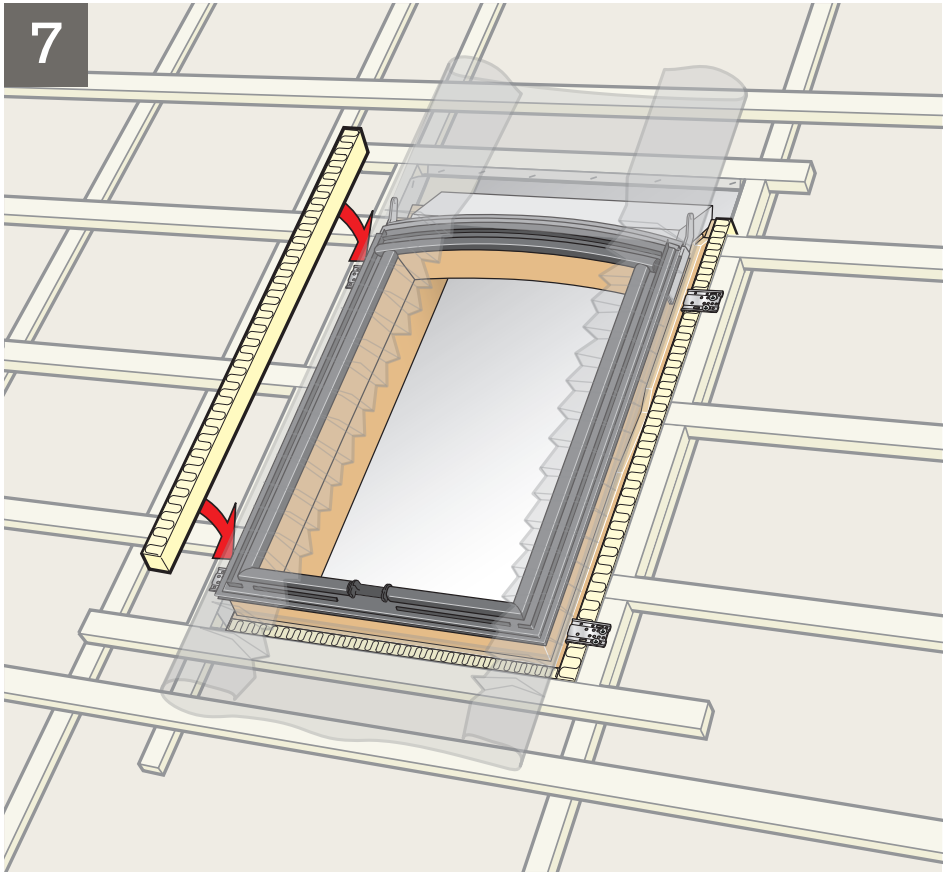

7

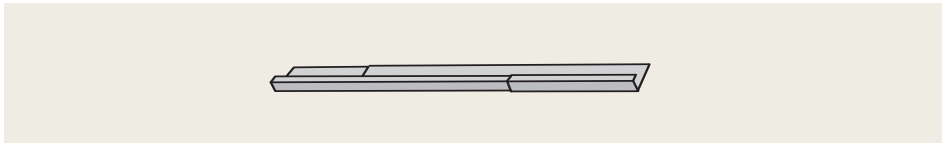


8

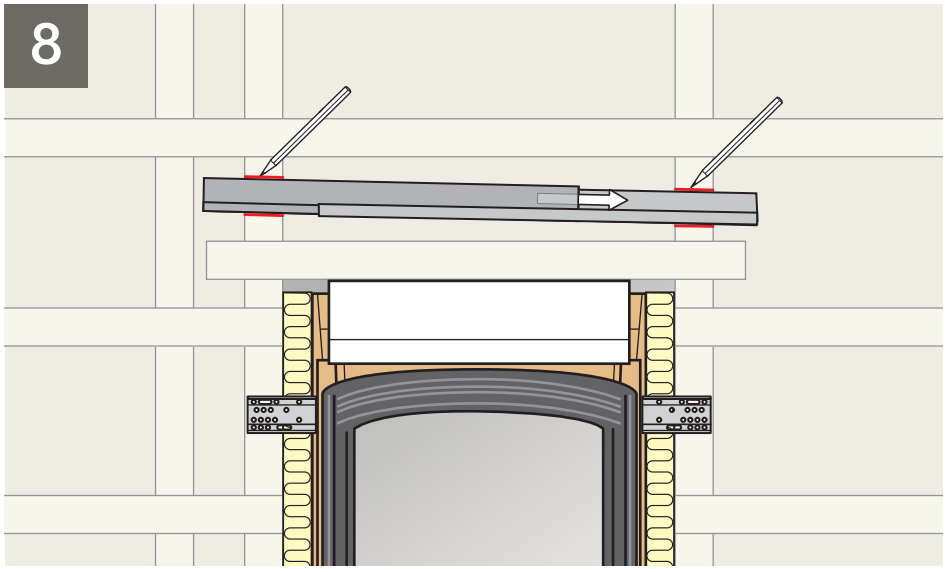


9

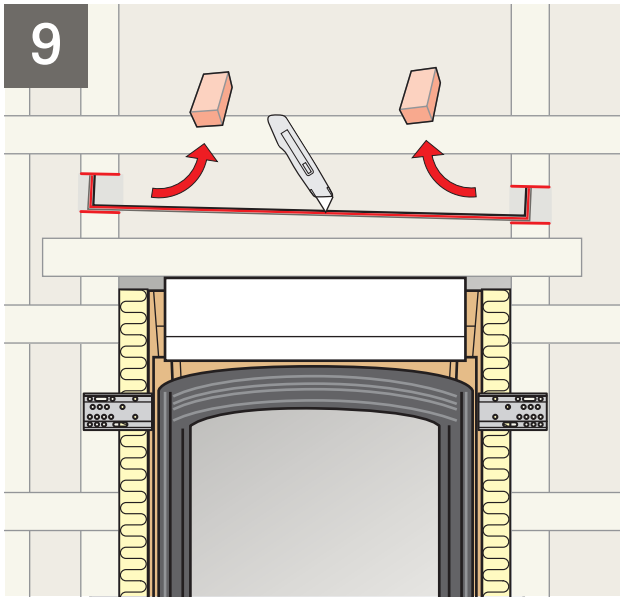








10

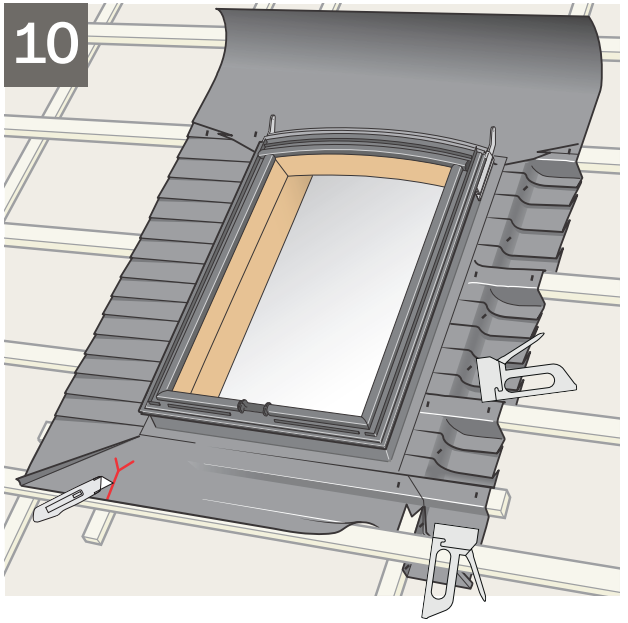





11

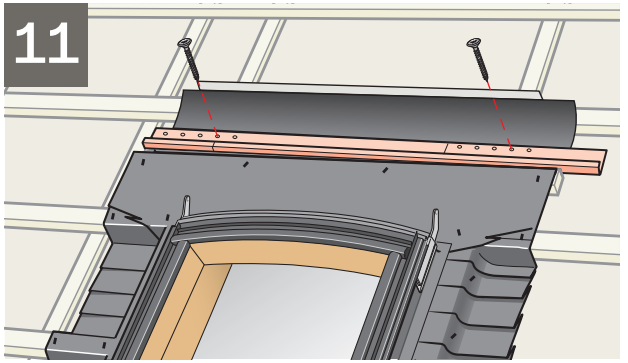


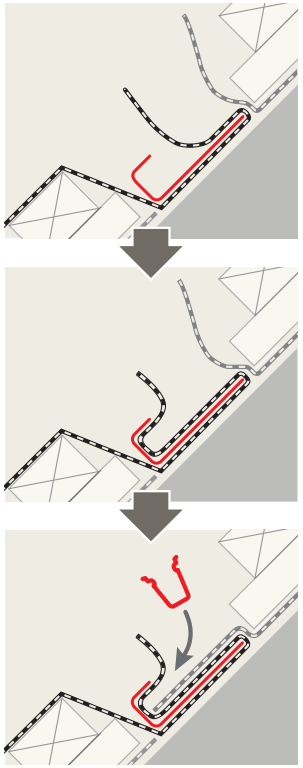


12

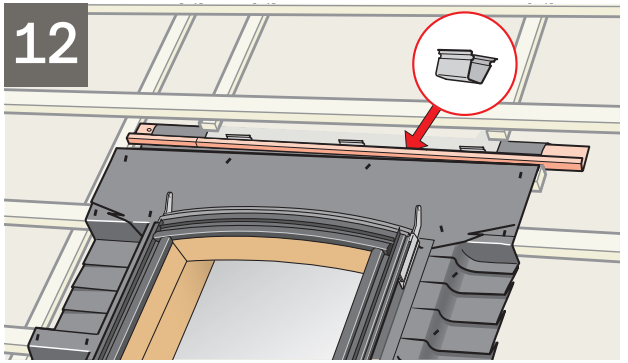


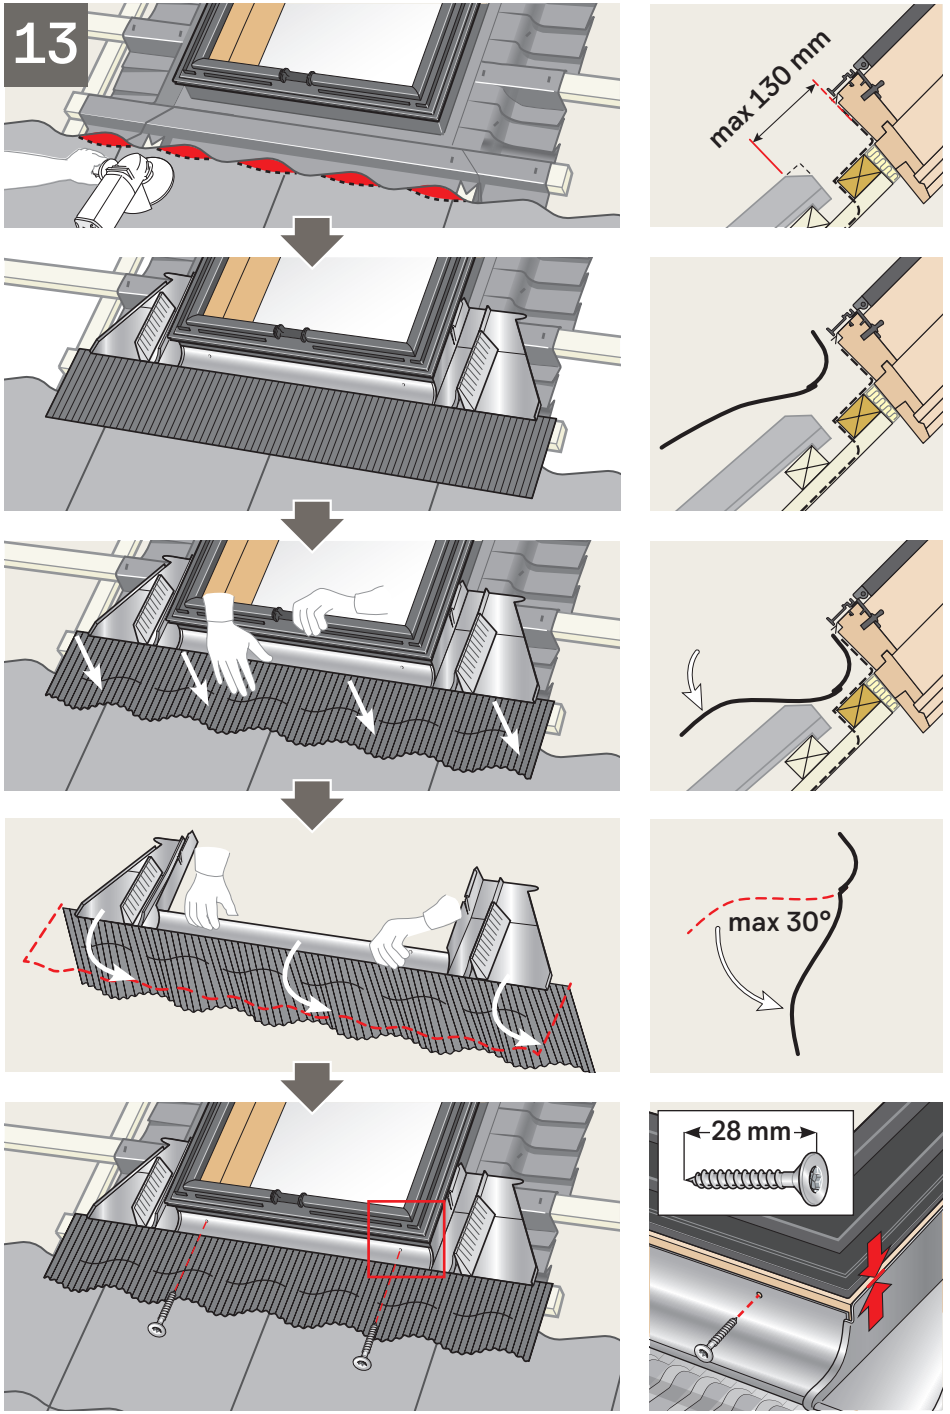
13
max 130 mm
max 30°
28 mm

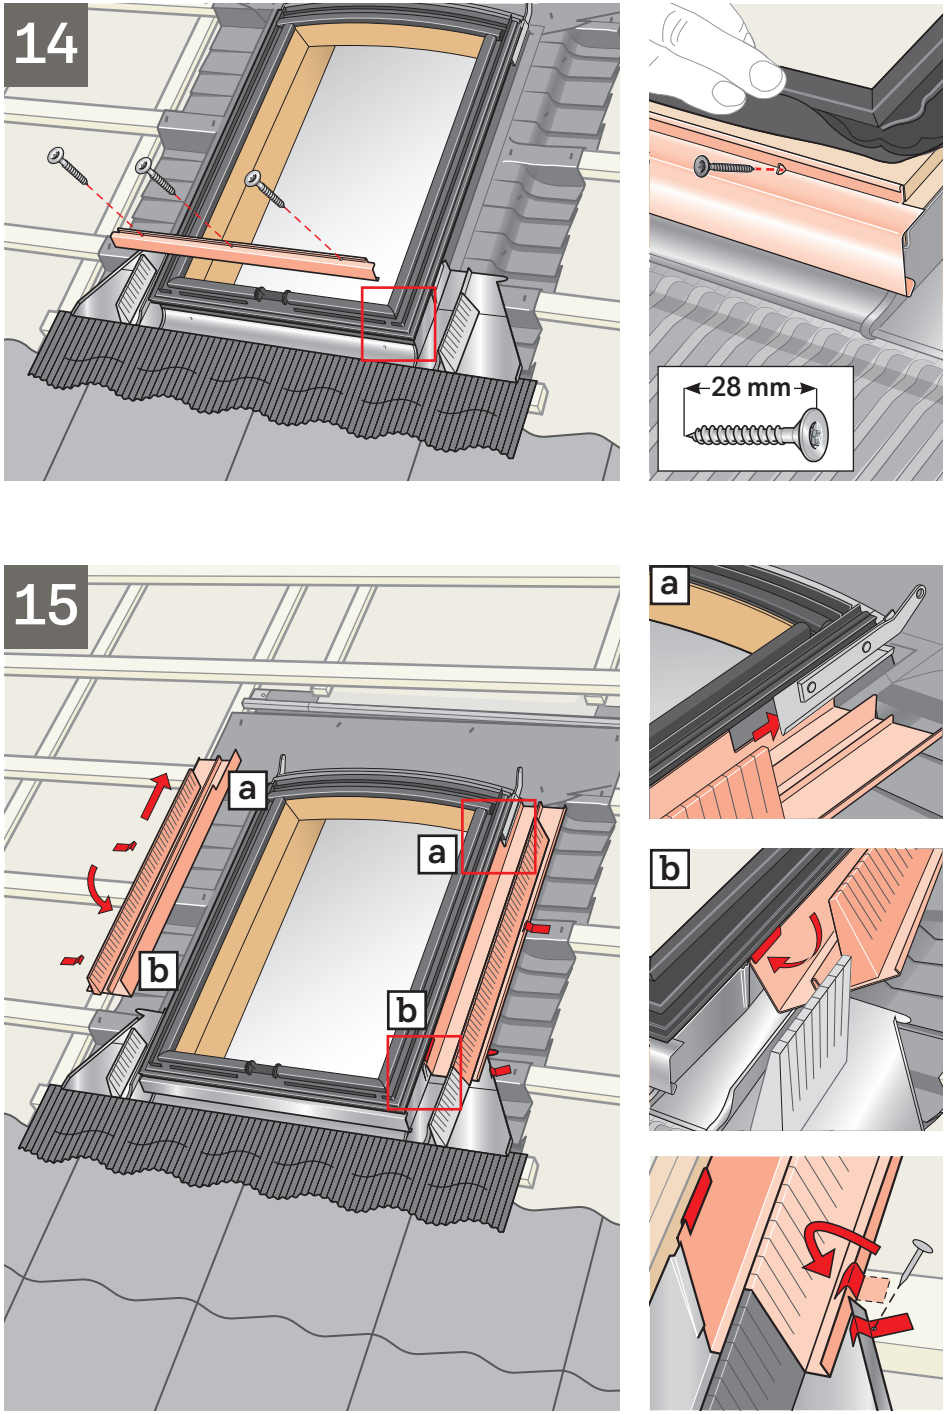

14
28 mm
15
a
b
a
b
a
b


16

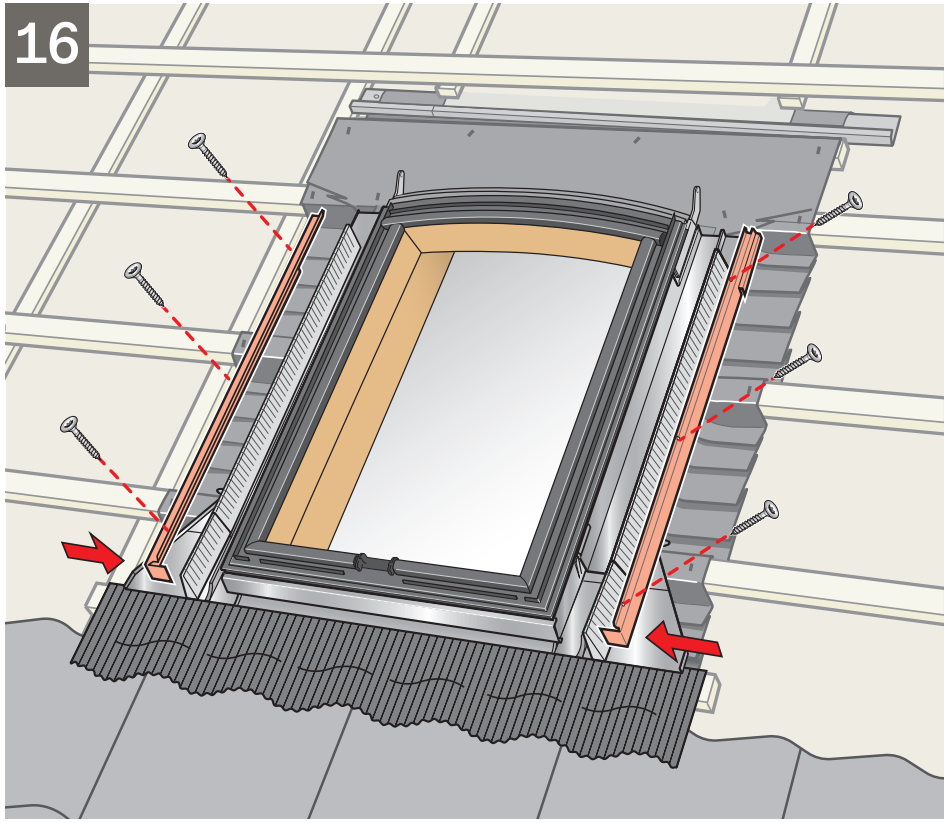


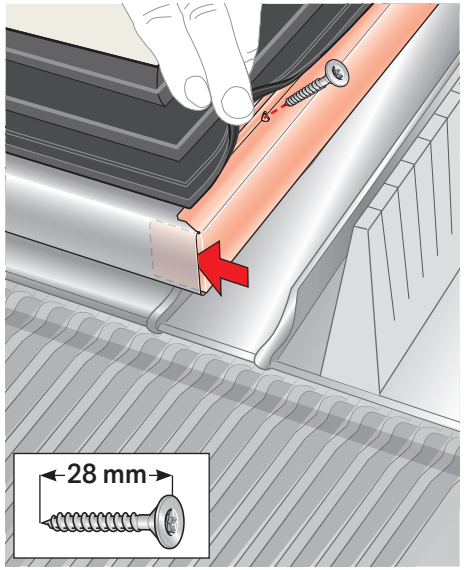


17

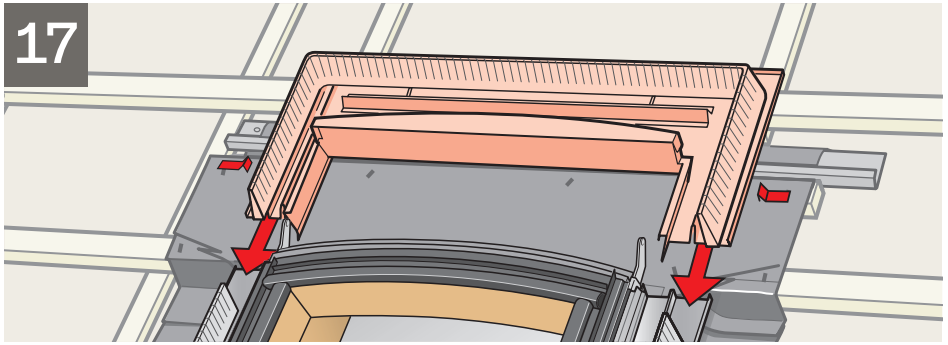


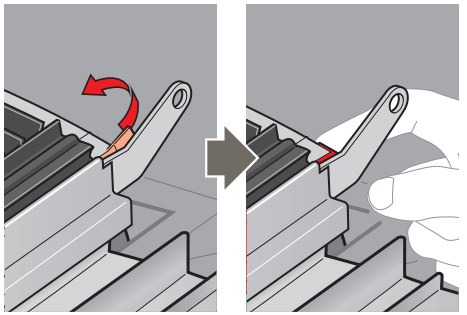


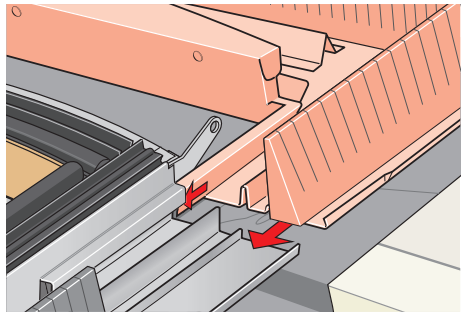



18

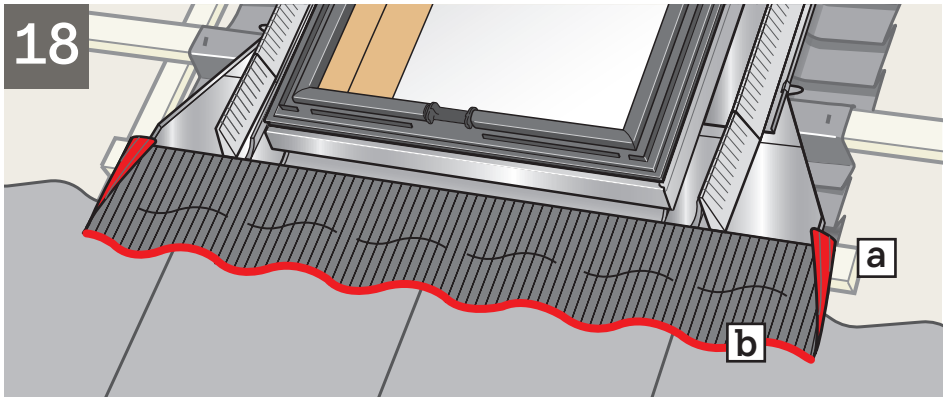







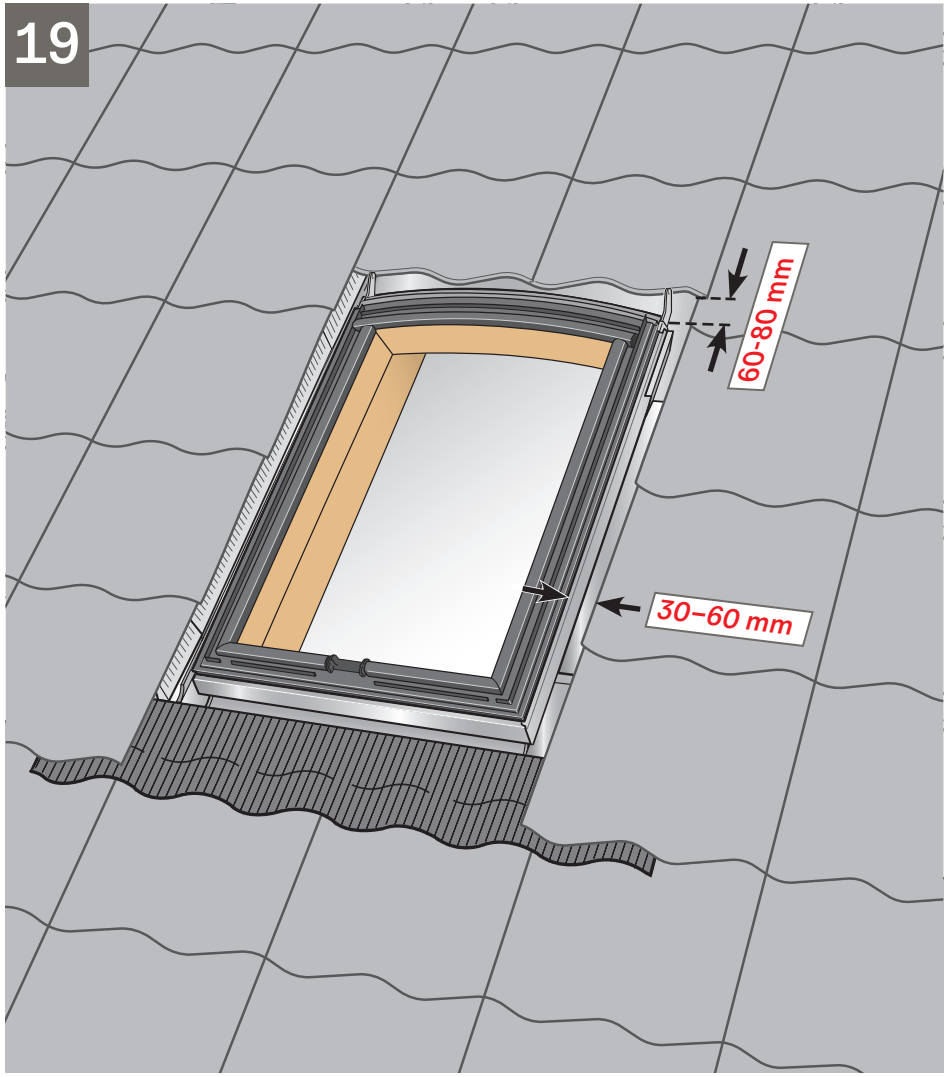
19
60-80 mm
30–60 mm

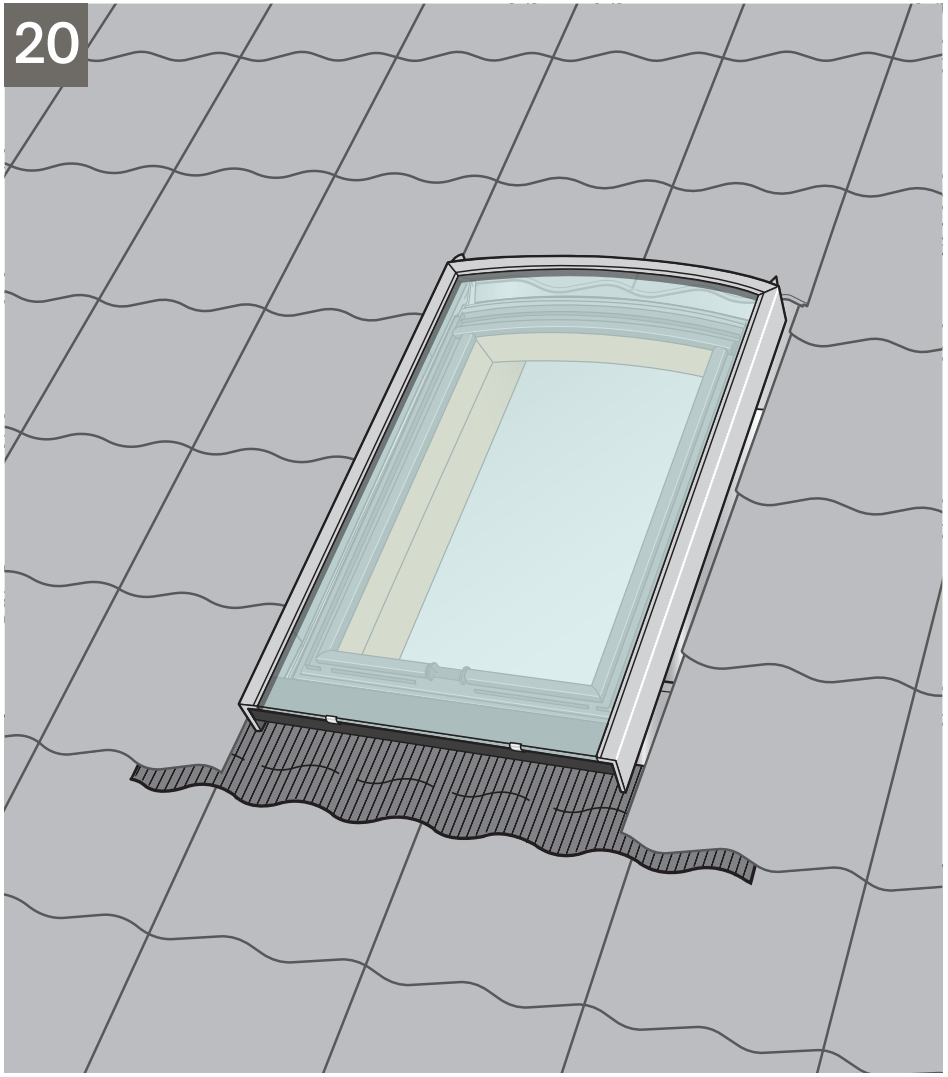
20

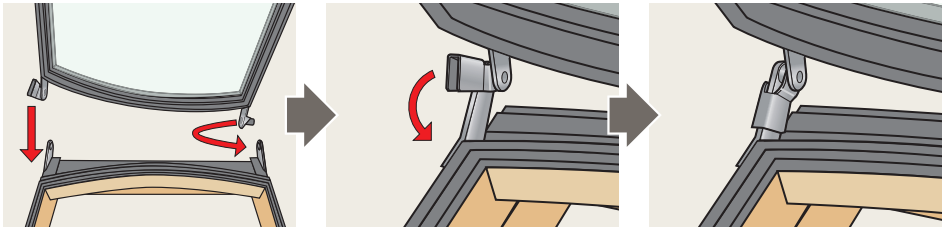

VELUX®



velux.com/contact

www.velux.com

INSTALLATION INSTRUCTIONS FOR FLASHING EDW. ©2017, 2025 VELUX GROUP ®VELUX AND THE VELUX LOGO ARE REGISTERED TRADEMARKS USED UNDER LICENCE BY THE VELUX GROUP