


# VELUX roof window GLL 1061

**VELUX®**

Glazing 61 (with TPS spacer)



The original VELUX top-operated, centre-pivot roof window GLL 1061 delivers energy efficiency without compromising on quality, thanks to an exceptionally affordable three-layer glazing. The window is easy to operate and gives you the freedom to place furniture underneath.

- Top operation allows for a low installation height that lets you enjoy the view while seated.
- Improve energy efficiency with this great value for money 3-layer glazing with a  $U_w$  of 1.1 W/(m<sup>2</sup>K).
- Refresh your home by slightly opening the window and fixing it in the top bushing.
- Open the top control bar to the ventilation position for fresh air through a closed window.
- Easily rotate the window 180° for safe cleaning of the outer glass from the inside.
- Maintenance-free exterior covers increase peace of mind throughout the lifetime of the roof window.
- Removable and cleanable ventilation filter protects your home from dust and insects while ventilating.

CE

## Application guidance

The window can be installed in roof pitches between 15° and 90° to the horizontal.



Manually top-operated, centre-pivot roof windows make it possible to place furniture directly below the window without obstructing the window operation. We recommend an installation height that allows for a clear view to the outside from both a standing and seated position. Please note that the optimum window height depends on the roof pitch.


## Available sizes and daylight area

|        | 550 mm                          | 660 mm                          | 780 mm                          | 942 mm                          | 1140 mm                         |
|--------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
| 778 mm | GLL<br>CK02<br>(0.22)<br>[0.26] |                                 |                                 |                                 |                                 |
| 978 mm | GLL<br>CK04<br>(0.29)<br>[0.34] | GLL<br>FK04<br>(0.38)<br>[0.43] | GLL<br>MK04<br>(0.47)<br>[0.53] |                                 |                                 |
| 1178   |                                 | GLL<br>FK06<br>(0.47)<br>[0.54] | GLL<br>MK06<br>(0.59)<br>[0.66] | GLL<br>PK06<br>(0.75)<br>[0.83] | GLL<br>SK06<br>(0.95)<br>[1.03] |
| 1398   |                                 | GLL<br>FK08<br>(0.58)<br>[0.66] | GLL<br>MK08<br>(0.72)<br>[0.81] | GLL<br>PK08<br>(0.92)<br>[1.01] | GLL<br>SK08<br>(1.16)<br>[1.25] |
| 1600   |                                 |                                 | GLL<br>MK10<br>(0.85)<br>[0.94] |                                 |                                 |

All measurements are in mm. ( ) = Effective daylight area, m<sup>2</sup> [ ] = Geometric free area, m<sup>2</sup>

## Cross section dimensions

Please note that the view of the cross section is from bottom to top

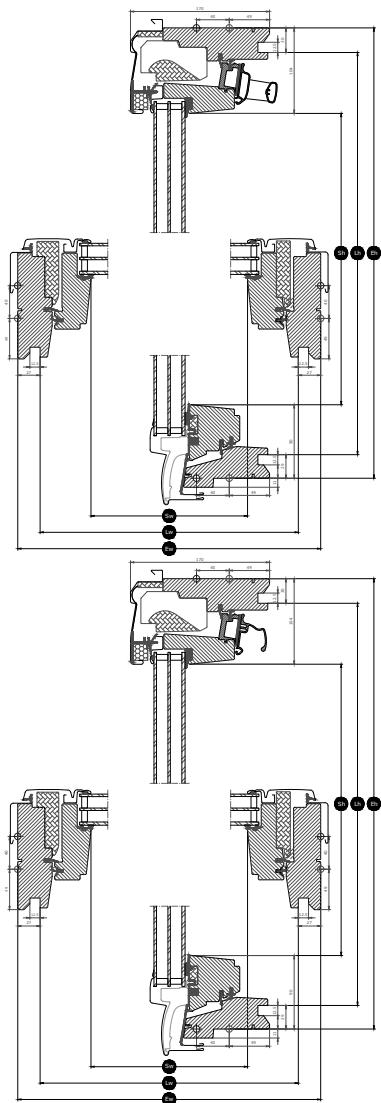

| Width |  | CK-- | FK-- | MK-- | PK-- | SK-- |
|-------|--|------|------|------|------|------|
| Sw    | Sash aperture width                    | 371  | 481  | 601  | 763  | 961  |
| Lw    | Distance between lining grooves, width | 495  | 605  | 725  | 887  | 1085 |
| Ew    | Exterior frame width                   | 550  | 660  | 780  | 942  | 1140 |

| Height |   | --02 | --04 | --06 | --08 | --10 |
|--------|---|------|------|------|------|------|
| Sh     | Sash aperture height                    | 584  | 784  | 984  | 1204 | 1406 |
| Lh     | Distance between lining grooves, height | 719  | 919  | 1119 | 1339 | 1541 |
| Eh     | Exterior frame height                   | 778  | 978  | 1178 | 1398 | 1600 |

## Glazing features

|   |   |             |
|---|---|-------------|
| <b>Glazing 61 (with TPS spacer)</b>  |   |             |
|                                        | <b>Heat insulation</b><br>The low energy glazing unit reduces heat loss through the window and enhanced indoor comfort.   | $U_g = 0.6$ |
|                                        | <b>Solar gain</b><br>In colder climates and in rooms with large window areas, solar gain provides a better indoor climate during winter periods.                        | 0.50        |
|                                        | <b>Solar protection</b><br>In warm climates and in rooms with large window areas, a sun protective glazing unit provides a better indoor climate during summer periods. | ★★★★        |
|                                        | <b>Security</b><br>Thicker laminated inner glass increases resistance to manual attack (burglary).  | N/A         |
|                                      | <b>Safety lamination</b><br>Prevents glass from falling into the room in case of accidental breakage.   |             |
|                                      | <b>Toughened glass</b><br>Adds strength to the outer glass surface to protect from wayward balls and extreme weather such as heavy storms and hail.                     | ✓           |
|                                      | <b>UV filter</b><br>Protects your interior furnishings from fading due to the sun's harmful UV rays.  |             |
|                                      | <b>Rain noise reduction</b><br>Rain noise reduction creates a barrier between the window and the weather outside for undisturbed moments during rainy days – or nights. |             |
|                                      | <b>Easy-to-clean</b><br>Dirt-repellent coating lets you spend less time cleaning and more time enjoying the view.   |             |
|                                      | <b>Anti-dew</b><br>The anti-dew coating significantly reduces the days with dew on the outer glass and thus gives you a clear view.                                     |             |

### Glazing structure

| Glazing unit  | Composition (from inside to outside)   |
|---------------|--|
| Triple-glazed | 4 mm float glass - 15 mm Argon - 3 mm heat strengthened glass - 15 mm Argon - 3 mm toughened glass |

## Technical values for the window

Overview of technical values for the product, covering among other, CE marking in accordance with EN 14351-1.

| Window characteristics                       | Performance              |
|--|--------------------------|
| Thermal transmittance (U-value)              | 1.1 W/(m <sup>2</sup> K) |
| Light transmittance ( $\tau_v$ )             | 0.68                     |
| Total solar energy transmittance (g-value)   | 0.50                     |
| Sound insulation (Rw)                        | 32(-1;-4)                |
| Air permeability, [class]                    | 4                        |
| External fire performance - British [class]  | AA                       |
| External fire performance - European [class] | npd                      |
| Impact resistance [class]                    | 3                        |
| Load-bearing capacity of safety devices      | ✓                        |
| Reaction to fire [class]                     | C-s1,d0                  |
| Resistance to snow load                      | See glazing composition  |
| Resistance to wind load [class]              | C3 (>SK08: NPD)          |
| Water tightness [class]                      | E900                     |

NPD: No Performance Determined

## Visible features



### Control bar aluminium

The aluminium control bar can be used to easily open the window. It can also lock the ventilation flap in the ventilation position.



### Ventilation flap, aluminium

The full-width ventilation flap can be used for ventilation even with a closed window.



### Blind bracket, manual

Easily install blinds on the window without the need for extra tools. Simply click on the blind in the pre-fitted brackets.



### Frame hinge, centre-pivot, side

Durable hinge design allows for reliable operation and enables the sash to be rotated for easy cleaning of the outer glass.



### Interior insulation, frame top sides

Innovative ThermoTechnology™ insulation is integrated into the top frame sides of the window to increase energy-efficiency.



### Barrel bolt

The barrel bolt can be placed into the integrated barrel bolt bushing to secure the window for cleaning of outer glass surface or for safe ventilation.



### Headlock

When closed, the window is locked firmly into place by the headlock.

### Data plate

Every VELUX roof window has a unique data plate with information that can be used to look up CE marking documentation, when purchasing accessories or in case of service or replacement.



## Interior finish

| Material Description                   | Clear lacquer<br>Finished with double coat. |
|--|---|
| Colour code NCS, inner surface         | No colour code                              |
| Colour code nearest RAL, inner surface | No colour code                              |

## Exterior covers

| Material Description                   | Aluminium, black<br>Black | Aluminium, dark grey<br>Dark grey |
|--|---------------------------|-----------------------------------|
| Colour code NCS, outer surface         | S 9000-N                  | S 7500-N                          |
| Colour code nearest RAL, outer surface | 9005                      | 7043                              |

## Cleaning and maintenance



To clean the outer glass surface from the inside, rotate sash and secure in cleaning position with barrel bolts.



VELUX repair and maintenance kits are available.

## Guarantee period

## Flashings and installation products

---



### **Flashings**

Install the VELUX roof window in virtually any roofing material by using genuine VELUX flashing solutions. Our flashings are designed specifically for the exact size and shape of the roof windows to create perfect, watertight fit. Flashings can also be used to combine multiple roof windows.

### **Installation products**

Ensure a proper installation and an air- and watertight connection between the window and roof with VELUX installation products. All installation products are designed to perfectly fit the roof window for a reliable and durable result.

## Blinds, awnings and shutters

---

Complete the VELUX roof window installation with roller shutters and awning blinds for heat protection and interior blinds for light dimming, blackout and insect protection. Choose from a wide range of manually operated or remote-controlled products that are made to fit the particular window type and size. Please contact your local VELUX sales company for more details about compatibility.

## Further information

---

We reserve the right to make technical changes.

For more information on our products, please visit <https://velux.com>.