

VELUX electric glass rooflight CVU with integrated power supply

Glazing 25A, triple-glazed



Transform your home by bringing the magic of daylight and fresh air into areas where you never thought possible with the new generation of VELUX glass rooflights. The base unit of the electrically vented glass rooflight has a unique design with a slim frame and invisible sash providing maximum daylight and a beautiful design from inside the home. This vented base unit comes with 3-layer glazing, but is also available with 2-layer glazing, and has excellent energy performance as well as sound reduction capabilities in case of rain, hail or traffic. It delivers fresh air at the touch of a button and has a pre-installed rain sensor that conveniently closes the window automatically in the event of rain, thus providing full peace of mind. It can even be operated via a smart phone, using the VELUX App Control. A both beautiful and convenient solution for your home.

- Minimal visible rooflight frame contributes to glass-to-edge view to the sky and to letting in maximum daylight.
- Enjoy maximum daylight and a stylish design from inside the home, as blinds or awnings are discretely placed in the rooflight.
- The motor and power supply are hidden from view in the rooflight frame for a sleek appearance and unobstructed view to the sky.
- The electrically vented glass rooflight lets you easily air your room at the touch of a button.
- Integrated rain sensor automatically closes the window in the event of rain.
- Enjoy a quieter indoor environment thanks to the sound-reducing rooflight design.
- The low placement of the insulating glass unit in the construction gives optimal energy performance and an elegant, slim design - especially with blinds and awnings installed.
- The loose installation triangle gives you more flexibility during installation and supports installation of the rooflight in different roofing materials and uneven roof surfaces.



Application guidance

Installation in a roof pitch between 0° and 15° with an ISU 1093 curved glass top unit and between 2° and 15° with an ISU 2093 flat glass top unit. On rectangular sizes, the motor is placed on the long side. The CVU electric base unit should be installed the long side 'down' with rain-sensor down the slope and hinges up the slope.

Available sizes and daylight area

	1500	2000
600		CVU 200060 (1.04) [0.35]
800	CVU 150080 (1.06) [0.29]	
1000		CVU 200100 (1.82) [0.38]
1200	CVU 150120 (1.64) [0.32]	
1500	CVU 150150 (2.07) [0.35]	

All measurements are in mm. () = Effective daylight area, m² [] = Geometric free area, m²

*A=large sizes with glazing variant -A


Net Weight

Please note that a complete flat roof window consists of a top unit and a base unit supplied separately. The total weight of the complete solution must therefore be calculated by adding the unit weight of the top unit and the unit weight of the base unit, as specified in their respective data sheets.

	150080	150120	150150	200060	200100
Net Weight (kg)	108.659	147.193	174.619	114.022	160.490

Cross section dimensions

Please note that the view of the cross section is from bottom to top.

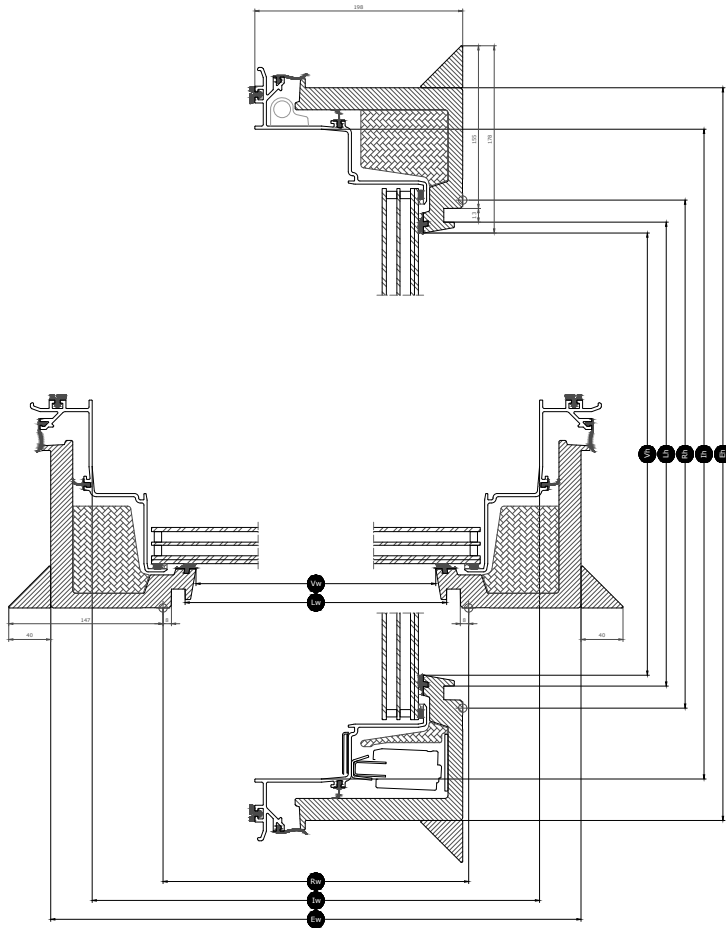

Width		150	200
Vw	Visible pane width	1438.2	1938.2
Lw	Inside groove measure width	1459	1959
Rw	Roof opening width	1500	2000
Iw	Inside sash measure width	1636	2036
Ew	External frame width	1715	2215

Height		060	080	100	120	150
Vh	Visible pane height	538.2	738.2	938.2	1138.2	1438.2
Lh	Inside groove measure height	559	759	959	1159	1459
Rh	Roof opening height	600	800	1000	1200	1500
Ih	Inside sash measure height	736	936	1136	1228	1636
Eh	External frame height	815	1015	1215	1415	1715

Technical values

Overview of technical values for the product, covering among other, CE marking in accordance with EN 1873 or EAD 200062-00-0401.

Window characteristics	CVU 25Q + ISU 1093	CVU 25Q + ISU 2093
Air permeability	4	4
Thermal transmittance $U_{rc,ref300}$ (CE-marked) (U-value)	0.55	0.60
Arc, ref300 (U-value transmission area)	4.4	4.1
Light transmittance (τ)	0.63	0.63
Sound insulation R_w dB [dB]	42	41
Total solar energy transmittance (g)	0.49	0.49
Ultraviolet transmittance (τ_{uv})	0.05	0.05
Burglar resistance window	RC2	RC2
Frame factor	0.1	0.1
Air permeability	4	4
Reaction to fire	C-s2, d2	C-s2, d2
Bonding of cover glass (glass of top unit) [class]	$\Delta X \geq 0.75$	$\Delta X \geq 0.75$
External fire performance - European		
External fire performance - British	NPD	NPD
Impact resistance	3	3
Impact resistance large soft body	N/A	N/A
Impact resistance small hard body	N/A	N/A
Rain noise	44 dB	44 dB
Resistance to downward loads	N/A	N/A
Resistance to fire	NPD	NPD
Resistance to snow load	*	*
Resistance to upward load	N/A	N/A
Resistance to wind load	C3	C3
Water tightness	9A	9A

NPD: No performance determined

Glazing structure

Glazing unit	Variant composition
Triple-glazed	9.5mm laminated float glass - 10mm Argon - 4mm heat strengthened glass - 10mm Argon - 8mm toughened glass with enamel

Blinds and awnings

Complete your VELUX glass rooflight with a blind for complete comfort. Choose between an anti-heat blind to maintain a cool room on hot days or a blackout blind to block outside light for total darkness. The blinds are discreetly placed and do not compromise daylight and design when not in use. You also have the option of adding an insect screen that lets you enjoy fresh air without any insects.

Use VELUX App Control or VELUX ACTIVE with NETATMO for smartphone control of your vented glass rooflight and blinds.

Compatibility

The electrically vented base unit for rooflight CVU is compatible with the flat glass top unit ISU 2093 and curved glass top-unit ISU 1093.

The following blinds are compatible with the electrically vented base unit CVU: The solar-powered anti-heat blind MSU, the solar-powered blackout blind DSU and the manual insect screen ZIU.

Further information

We reserve the right to make technical changes.

For more information on our products, please visit <https://www.velux.co.uk> or <https://www.velux.ie>.